INCH-POUND

MIL-PRF-8805/28F
31 October 3001

SUPERSEDING
MIL-PRF-8805/28E
10 March 1987

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, MOMENTARY
SPDT, 7.5 AMPERES, UNSEALED

This specification forms a part of MIL-PRF-8805, dated 23 January 1998, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-8805.

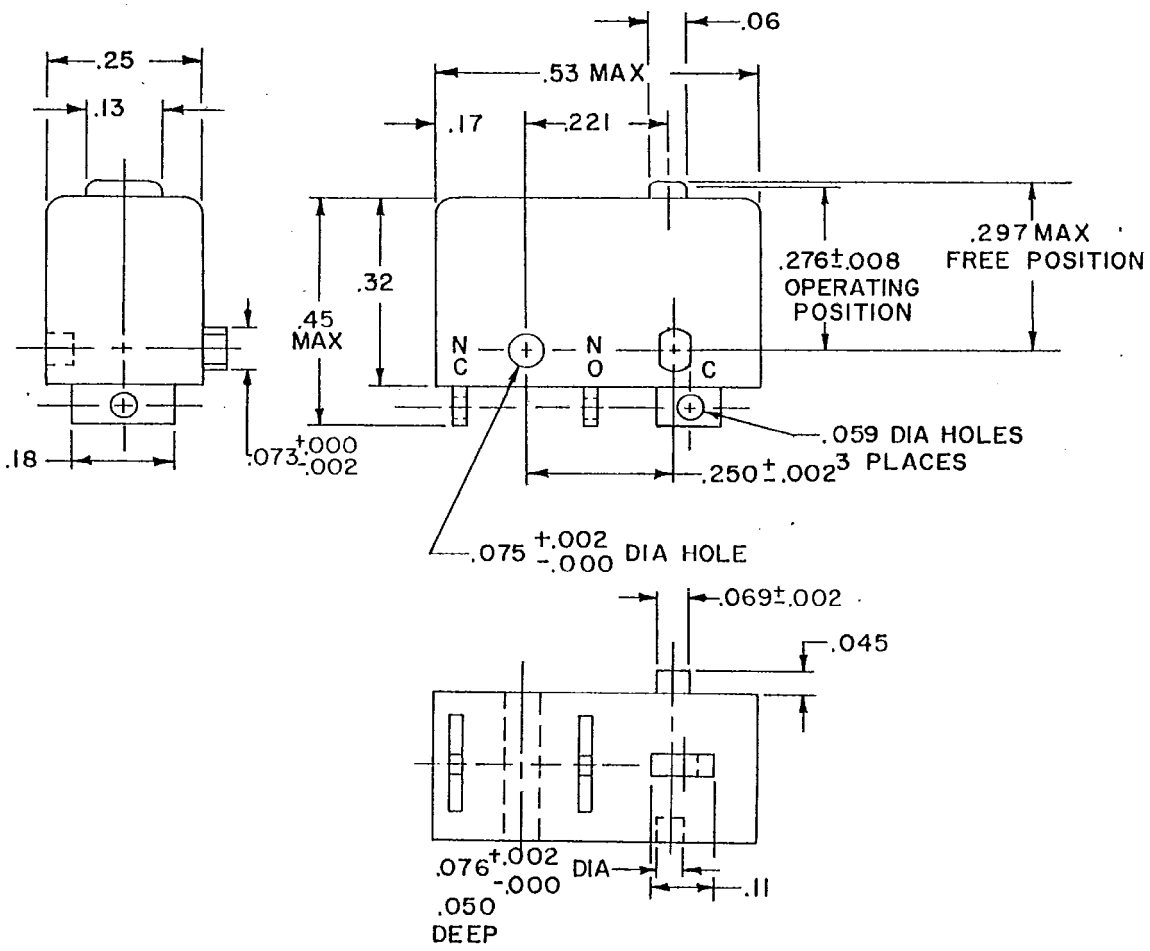

`FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

nches	mm	Inches	mm
.002	0.05	.13	3.30
.008	0.20	.17	4.32
.045	1.14	.18	4.57
.050	1.27	.221	5.61
.059	1.50	.25	6.35
.06	1.52	.250	6.35
.069	1.75	.276	7.01
.073	1.85	.297	7.54
.075	1.91	.32	8.13
.076	1.93	.45	11.43
.11	2.79	.53	13.46

NOTES:
1. Dimensions are in inches.
2. Unless otherwise stated, tolerance is ±.02 (0.51 mm) for two place decimals and ±.005 (.0.13 mm) for three place decimals.
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Mark, stamp or mold NO, NC and C shall be permanently molded or hot stamped on adjacent area of the switch.
5. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm..

FIGURE 1. Dimensions and configuration -Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 1 (Unsealed).

Temperature characteristic: 1 (-55° to +85°C).

Shock type: Method 213, test condition A, MIL-STD-202 (50 G).

Sinusoidal vibration grade: 1 (10 to 500 Hz).

Weight: .60 ounce maximum.

Operating characteristics:

Actuating force: 7.05 ounces maximum.
Movement differential: .003 inch maximum.
Pretravel: .015 inch maximum.
Overtravel: .005 inch minimum.

Strength of actuating means: 25 pounds.

Terminal strength: 5 pounds

Material:

Plunger: May be glass filled nylon.

Mechanical endurance: 50,000 cycles at .005 +.001, -.000 inch overtravel.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

Contact resistance (following electrical endurance): Shall not exceed 2 percent of the load impedance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Load	Sea level	
	28 V dc	115 V ac, 400 Hz
	amperes	amperes
Resistive	7.5	7.5
Inductive	2.5	7.5
Motor	1.0	1.0

Part or Identifying Number (PIN): MS28134-1

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army – AR, AV, MI
Navy - AS, MC
Air Force - 19

Preparing activity:
DLA - CC

(Project 5930-1126-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.