INCH-POUND

MIL-S-8805/29A
19 June 1992
SUPERSEDING
MIL-S-8805/29
11 October 1965


MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, SPDT, MOMENTARY, DOUBLE BREAK, 10 AMPERES, UNSEALED

(A) INACTIVE FOR NEW DESIGN AFTER 19 JUNE 1992

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-8805

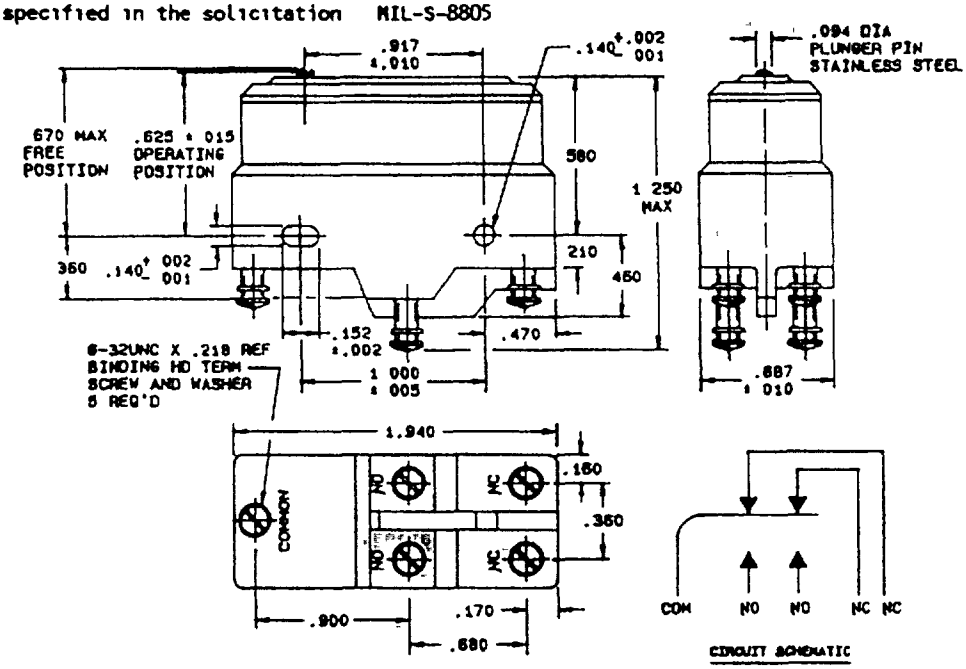

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0 03	.140	3.56	.460	11 68	.687	17 45
.002	0 05	.152	3.86	.470	11.94	.900	22.86
.005	0 13	160	4.06	.580	14.73	917	23 29
.010	0.25	170	4.32	.625	15.88	1.000	25.40
.015	0:38	.210	5.33	.670	17 02	1.250	31.75
.094	2.39	.360	9.14	.680	17.27	1 940	49.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 015
4. Exact shape of switch optional provided dimensions specified are not exceeded

FIGURE 1 Dimensions and configuration

(A) denotes changes

DISTRUBITION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1

Enclosure design 1 (unsealed).

Temperature characteristic 1 (-55°C to +85°C)

(A) Shock type M (100 g)

Vibration grade 10 to 55 Hz, method 201, MIL-STD-202

Weight 1 50 ounces maximum

Operating characteristics

Actuating force 16 to 26 ounces

Pretravel .030 inch maximum.

Movement differential· 004 inch maximum

Overtravel 005 inch minimum

Strength of actuating means· 25 pounds

Terminal strength 30 pounds

Material Cotton and wood flour filled phenolics may be used

Contact resistance. Not applicable

Mechanical endurance 50,000 cycles

Electrical endurance 25,000 cycles

Electrical ratings See table I

(A) Group B inspection Not applicable

Part number MS25383-1

TABLE I Electrical ratings

Load	Sea level		50,000 feet
	28 V dc	115 V ac, 400 Hz	28 V dc
	Amperes	Amperes	Amperes
Resistive	10	10	10
Inductive	3	10	3
Motor	3	2.5	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - SH
Air Force - 99
DLA - ES

User activities
Navy - MC
Air Force - 14, 19

Preparing activity
Navy -EC

Agent
DLA - ES

(Project - 5930-1498)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.