INCH-POUND

MIL-S-8805/31E
28 June 1995
SUPERSEDING
MIL-S-8805/31D
29 May 1987

MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, DPDT, PLUNGER, 10 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

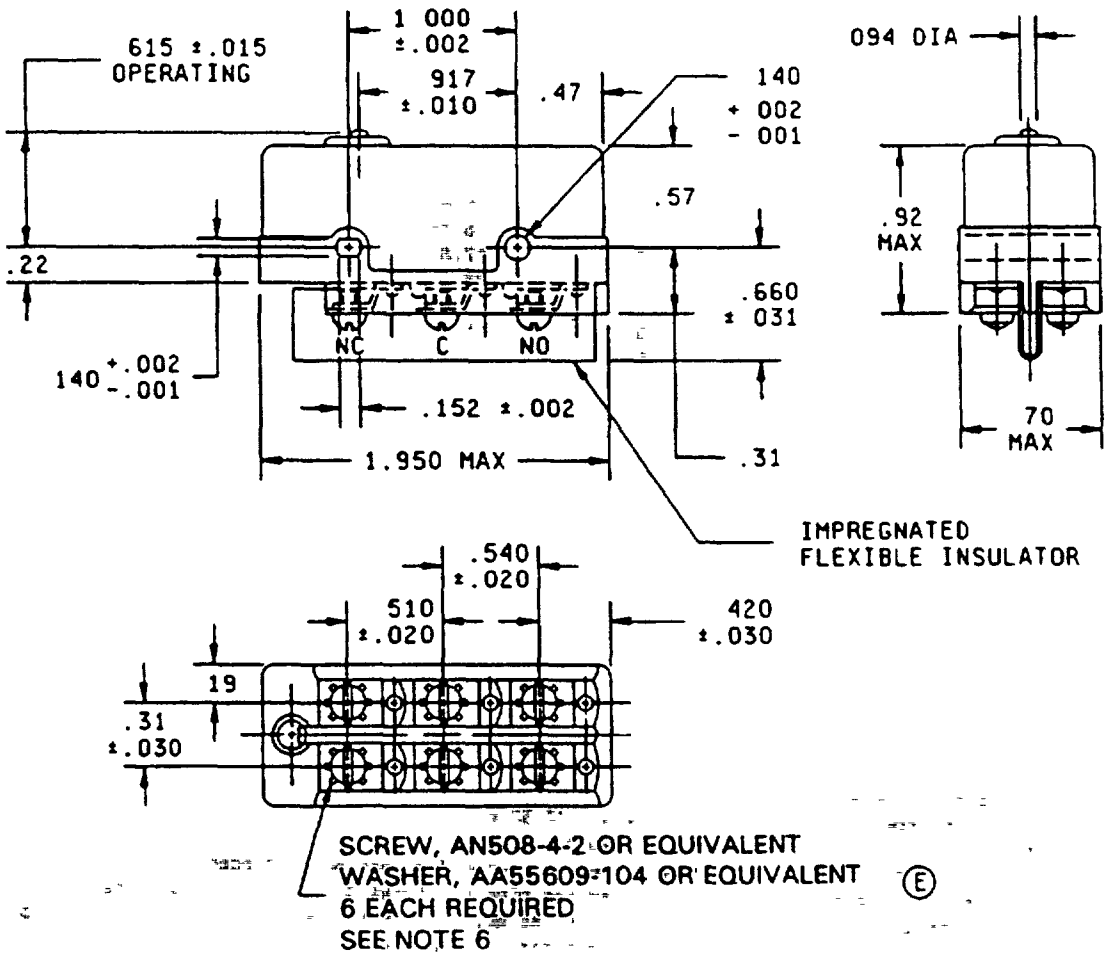


FIGURE 1. Dimensions and configuration.

(E) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:06Z
Check the source to verify that this is the current version before use.

Inches	mm
.001	0.03
.002	0.05
.010	0.25
.020	0.51
.030	0.76
.031	0.79
.094	2.39
.139	3.53
.140	3.56
.152	3.86
.19	4.8
.22	5.6
.31	7.9
.420	10.67
.47	11.9
.510	12.95
.540	13.72
.57	14.5
.615	15.62
.660	16.76
.70	17.8
.917	23.29
.92	23.4
1.000	25.40
1.950	49.43

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
3. Metric equivalents are given for general information only.
4. Exact shape of switch optional, provided dimensions specified are not exceeded.
5. Mounting holes shall accept .139 maximum diameter pins or screws on 1.000 ±.002 centers
(E) 6. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for terminal screw and lock washer material. Dimensions shall be in accordance with the referenced hardware specifications.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 1 (unsealed).

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: (30 g's) in accordance with method 213, test condition J, MIL-STD-202.

Vibration: (10 to 55 Hz) in accordance with method 201, MIL-STD-202.

Weight: 1.5 ounces maximum.

Operating characteristics:

Actuating force: 20 ounces maximum.

Release force: 2 ounces minimum.

Movement differential: .040 to .060 inch (1.02 to 1.52 mm).

Overtravel: .005 inch (0.13 mm) minimum.

Pretravel: .075 inch (1.91 mm) maximum.

Material:

Cover: MIL-M-14, type CFG may be used.

Case: General purpose wood-flour-filled phenolic may be used.

Contact resistance: Not applicable.

Dielectric withstanding voltage:

Sea level: 1,000 V rms.

Altitude: 400 V rms at 50,000 feet.

Mechanical endurance: 50,000 cycles.

Electrical endurance: 25,000 cycles.

Temperature rise: 65°C.

Electrical ratings: See table I.

Part or Identifying Number (PIN): MS25008-1.

TABLE I. Electrical ratings.

Load	Sea level 28 V dc	50,000 feet 28 V dc
	(amperes)	(amperes)
Resistive	10	10
Inductive	5	2
Motor	5	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:06Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - AS, MC, SH
Air Force - 19, 99

Preparing activity:
DLA - ES

(Project 5930-1571)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:06Z
Check the source to verify that this is the current version before use.