
MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, SPDT, MOMENTARY, DOUBLE BREAK, DUSTTIGHT

Ⓑ INACTIVE FOR NEW DESIGN AFTER 30 JUNE 1970

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805

This specification is mandatory for use by all Departments and Agencies of the Department of Defense

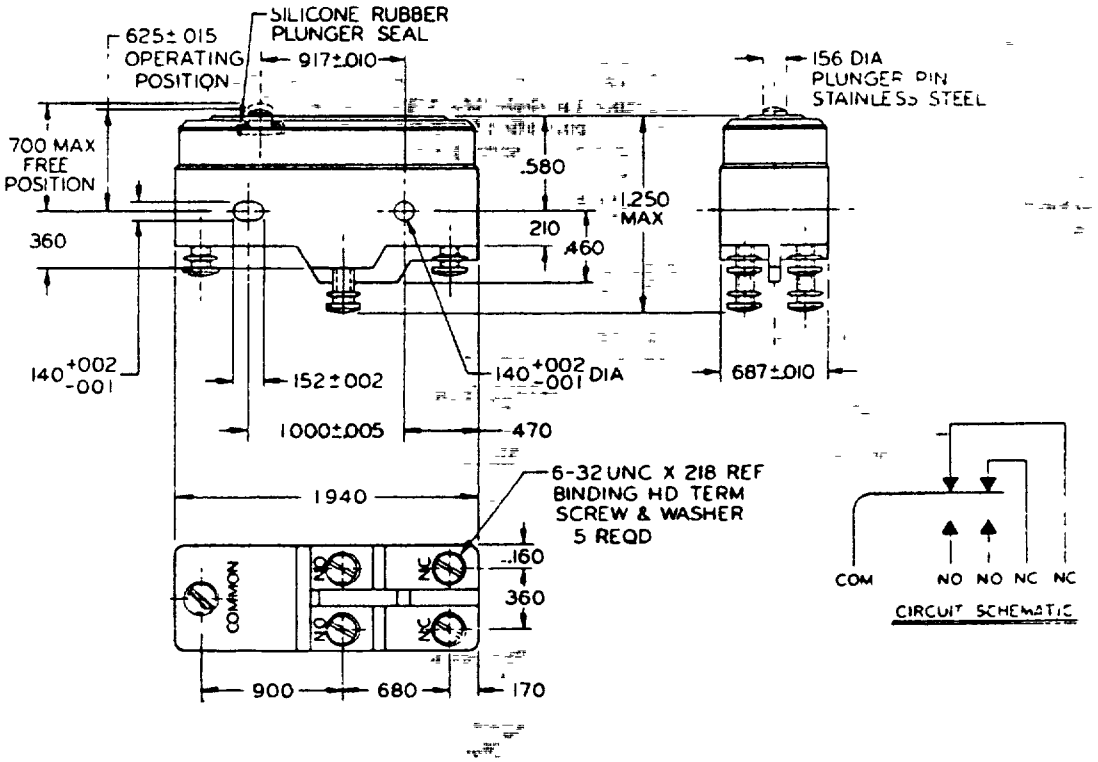

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.140	3.56	.197	5.00	.470	11.94	.700	17.78
.002	.05	.152	3.86	.210	5.33	.580	14.73	.900	22.86
.005	.13	.156	3.96	.218	5.54	.625	15.88	1.00	25.4
.010	.25	.160	4.06	.360	9.14	.680	17.27	1.250	31.75
.015	.38	.170	4.32	.460	11.68	.687	17.45	1.940	49.28

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015.
3. Exact shape of switch optional provided dimensions specified are not exceeded
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm

Ⓑ denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration	See figure
Enclosure design	2 (Dusttight).
Temperature characteristic	-40°C to +85°C
Shock type	M (50G).
Vibration grade	10 to 55 Hz, method 201, MIL-STD-202
Weight	1 50 ounces maximum
Operating characteristics	
Actuating force	16 to 26 ounces.
Pretravel:	.090 inch maximum
Movement differential	.004 inch maximum
Overtravel	005 inch minimum.
Strength of plunger pin and pin stop	25 pounds
Terminal strength	30 pounds
Material	Cotton and wood flour filled phenolic is allowed
Contact resistance	Not applicable
Dielectric withstanding voltage	
Sea level	1, 000 vrms In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.
Mechanical endurance	50, 000 cycles.
Electrical endurance	25, 000 cycles
Electrical ratings	See table I
(B) Quality assurance	
Group B	Not applicable
Group C	Not applicable

TABLE I Electrical ratings

Load	Sea level		50, 000 feet
	28 VDC	115 VAC, 400 Hz	28 VDC
	amperes	amperes	amperes
Resistive	10	10	10
Inductive	3	10	3
Motor	3	2.5	3

Part number	MS27241-1

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - MU
Navy - SH, AS, OS
Air Force - 17, 85
DSA - ES

User activities
Army - MI
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent
DSA - ES

(Project 5930-0711-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.