INACTIVE FOR NEW DESIGN

INCH-POUND

MIL-S-8805/35B
17 September 1990
SUPERSEDING
MIL-S-8805/35A
18 December 1968

MILITARY SPECIFICATION SHEET

SWITCHES, PUSH, 2 CIRCUIT, ALTERNATE ACTION, 10 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.


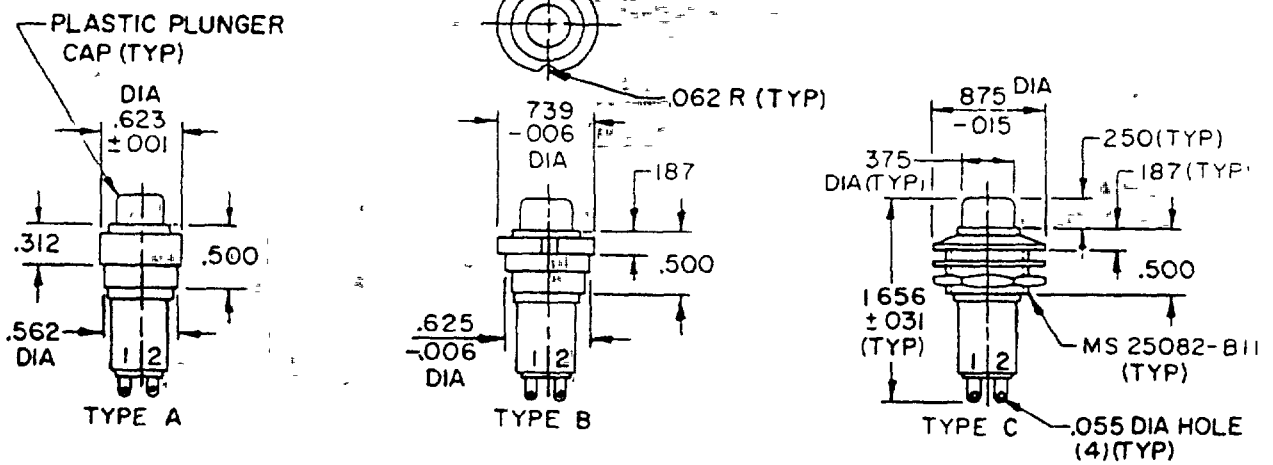


FIGURE 1. Configuration and dimensions.


(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:07Z
Check the source to verify that this is the current version before use.

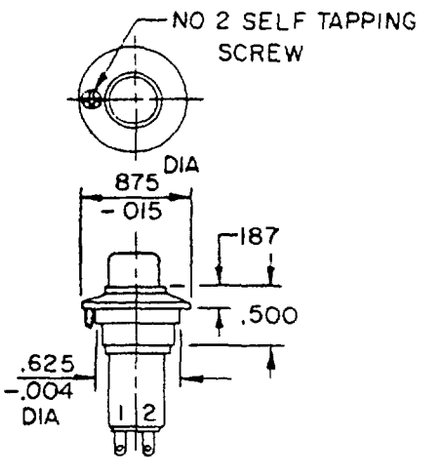


TYPE E




TYPE F




TYPE G



LOCKWASHER
MATERIAL:
PHOSPHOR BRONZE
QQ-P-330

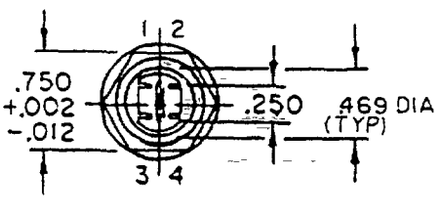

TYPICAL VIEW OF
BACK END



SCHEMATIC DIAGRAM

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.055	1.40	.623	15.82
.002	0.05	.062	1.68	.625	15.88
.004	0.10	.187	4.75	.640	16.26
.006	0.15	.250	6.35	.687	17.45
.012	0.30	.312	7.92	.739	18.77
.015	0.38	.375	9.53	.750	19.05
.019	0.48	.469	11.91	.875	22.23
.022	0.56	.500	12.70	1.656	42.06
.031	0.79	.562	14.27		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (0.25 mm)
3. Switch cases C, F, and G shall be furnished with one each mounting nut MS25082-B11 (.625-24 UNEF-2B) and one lockwasher (see detail).
4. Marking of terminals shall be as shown.
5. Metric equivalents are given for general information only.

FIGURE 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Configurations and dimensions See figure 1.

(B) Enclosure design: 1 (Unsealed).

(B) Temperature characteristic 1, except 0°C to 85°C.

(B) Shock type: M, except 50 g in accordance with test condition G, method 213 of MIL-STD-202.

Vibration grade: 2 (10 to 2000 Hz).

Weight: 0.030 pound approximately.

Operating characteristics:

Total plunger travel: .203 inch approximately.

Operating pressure. 2.75 pounds ±1 pound.

Strength of actuating means: 10 pounds.

Material

Case: Aluminum alloy, 2011-T3.

Molded body: Flame resistant diallyl phthalate which meets the requirements of MIL-M-14.

(B) Actuator shaft: Glass-filled nylon, flame-retardant.

Finish: Case, anodized, MIL-A-8625, type II, exposed surfaces of case, as viewed by the operator, shall be black anodized.

Dielectric-withstanding voltage:

Sea level. 1,000 V rms.

Altitude 400 V rms

In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

(B) Mechanical endurance: 20,000 cycles.

(B) Electrical endurance: 10,000 cycles.

Electrical ratings: See table I.

Sand and dust: Applicable.

Qualification:

Group submission: See table II.

Part or Identifying Number (PIN): See tables III and IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:07Z
Check the source to verify that this is the current version before use.

TABLE I Electrical ratings.

Load	Sea level		50,000 feet
	28 V dc	120 V ac, 400 Hz	28 V dc
	(amperes)	(amperes)	(amperes)
Resistive	10	10	---
Inductive	3	3	1
Lamp	1	1	---

Ⓑ TABLE II. Qualification inspection.

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection of MIL-S-8805	M8805/35-005 or M8805/35-006 (all sample units)	All others (2 sample units each for visual and mechanical examination)	All

Ⓑ TABLE III. PIN.

PIN	Type	Plunger color
M8805/35-001	A	Black
M8805/35-002	A	Red
M8805/35-003	B	Black
M8805/35-004	B	Red
M8805/35-005	C	Black
M8805/35-006	C	Red
M8805/35-007	E	Black
M8805/35-008	E	Red
M8805/35-009	F	Black
M8805/35-010	F	Red
M8805/35-011	G	Black
M8805/35-012	G	Red

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:07Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE IV. Supersession information.

Superseding PIN	Superseded numbers in accordance with M8805/35A 18 December 1968
M8805/35-001	MS17974-1
M8805/35-002	MS17974-2
M8805/35-003	MS17974-3
M8805/35-004	MS17974-4
M8805/35-005	MS17974-5
M8805/35-006	MS17974-6
M8805/35-007	MS17974-7
M8805/35-008	MS17974-8
M8805/35-009	MS17974-9
M8805/35-010	MS17974-10
M8805/35-011	MS17974-11
M8805/35-012	MS17974-12

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Navy - AS, OS, SH
Air Force - 99

User activities
Army - MI
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1441-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:07Z
Check the source to verify that this is the current version before use.