MIL-A-27434/25A
5 FEBRUARY 1962
SUPERSEDING
MIL-A-27434/25
28 SEPTEMBER 1960

MILITARY SPECIFICATION

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, TYPE UG-977C/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for type UG-977C/U, between series (series QDL to series QDS), radiofrequency, coaxial connector adapter.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-A-27434 — Adapters, Connector, Coaxial, Radiofrequency, Between Series, General Specification for.

DRAWINGS

BUREAU OF SHIPS

REA10002 — Bushing.

REB10054 — Mounting Plate.

REB10296 — Body.

REB10309 — Insulator.

REB10316 — Contact.

REB101634 — Insulator.

(Copies of specifications and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS


3.1 **Requirements.** Requirements shall be in accordance with Specification MIL-A-27434, and as specified herein.

3.2 **Design and construction.** The connector adapter shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 *Gage tests for contacts.* The contact shall meet the gage tests for contacts specified in 4.2.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:58Z
Check the source to verify that this is the current version before use.

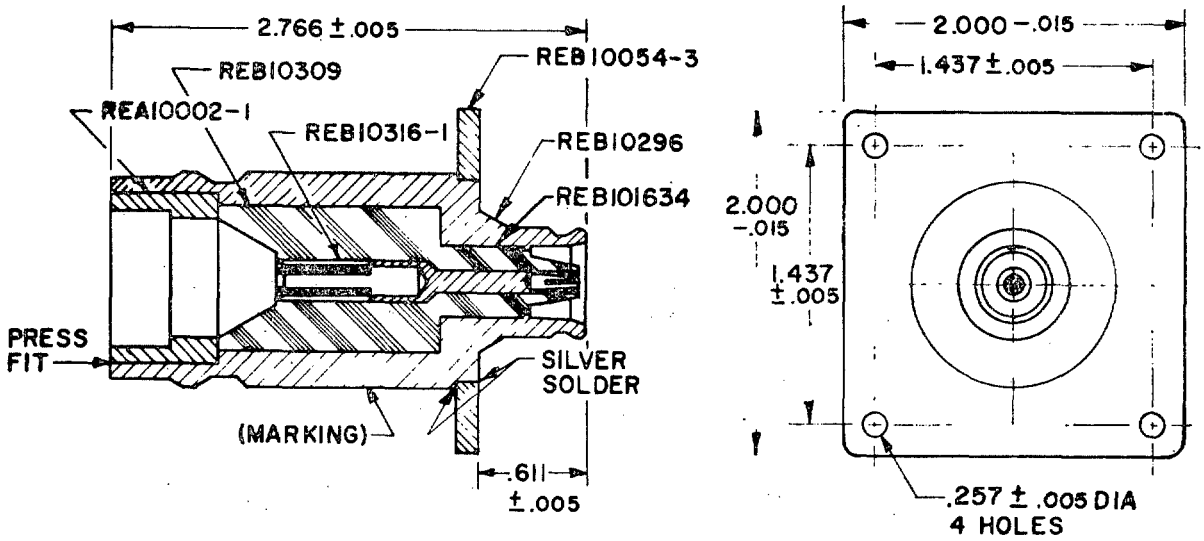


ALL DIMENSIONS IN INCHES

FIGURE 1. *Type UG–977C/U connector adapter.*

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with Specification MIL–A–27434, and as specified herein.

4.1.1 *Group B inspection.* Group B inspection shall be in accordance with Specification MIL–A–27434. Mating dimensions shall be as specified on figure 2.

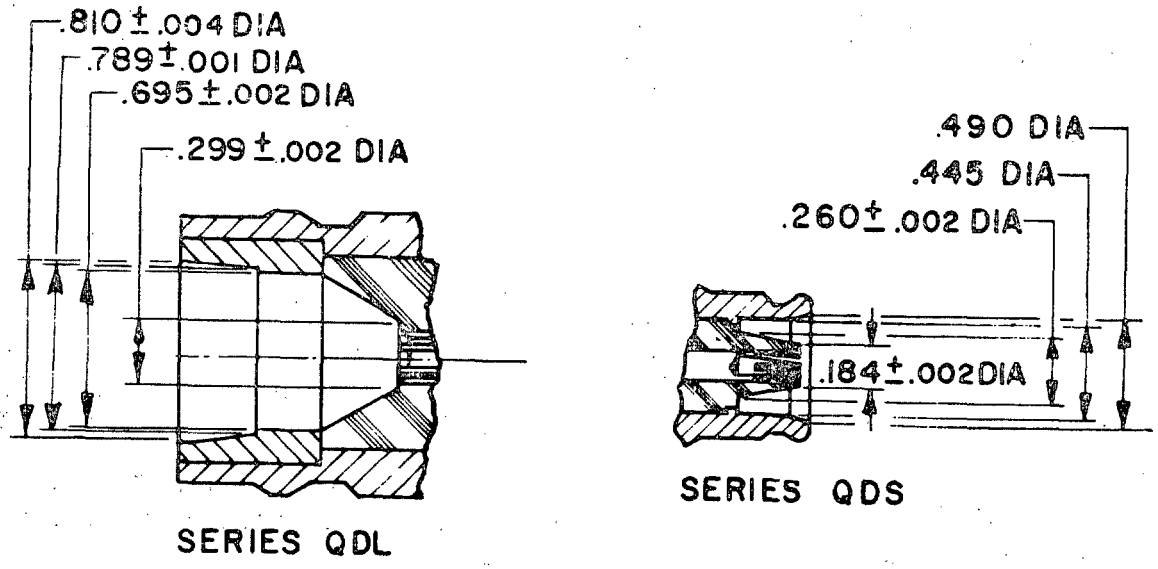

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are ±0.005 on decimals.

FIGURE 2. *Dimensional requirements for group B inspection*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:58Z
Check the source to verify that this is the current version before use.

4.2 Gage tests for contacts (see 3.2.1). The center contact shall be subjected to the gage tests specified in 4.2.1 and 4.2.2, prior to assembly into the connector adapter. The pins used in the performance of these tests may be tapered at their ends to facilitate insertion, but the tapered portions shall not be included in the specified dimensions. All tests shall be performed in the order shown.

4.2.1 *Series QDL termination.* A pin 0.200 inch minimum in diameter shall be inserted to a depth of 0.187 inch minimum, and then removed. The contact shall then be tested as follows:

(a) All contact members shall make contact, within 0.031 inch of their tip ends, with a pin 0.176 inch in diameter inserted to a depth of 0.187 inch minimum.

(b) A pin 0.168 inch minimum in diameter inserted to a depth of 0.187 inch minimum shall not deflect the contact members.

(c) When a pin 0.196 inch minimum in diameter is inserted to a depth of 0.187 inch minimum, all contact members shall make contact with said pin 0.031 inch maximum from their tip ends. The contact shall then pass through a cylindrical hole 0.230 inch maximum in diameter and 0.500 inch long when a pressure of not more than 2 pounds is applied.

4.2.2 *Series QDS termination.* A pin 0.100 inch minimum in diameter shall be inserted to a depth of 0.125 inch minimum, and then removed. The contact shall then be tested as follows:

(a) A pin 0.074 inch minimum in diameter inserted to a depth of 0.200 inch minimum shall not deflect the contact members.

(b) A pin 0.080 inch maximum in diameter inserted to a depth of 0.125 inch minimum shall make contact with all four contact members within 0.015 inch of their tip ends.

(c) A pin 0.093 inch minimum in diameter inserted to a depth of 0.062 inch minimum shall not cause the contact members to bow perceptibly.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL–A–27434.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in Specification MIL–A–27434 are applicable to this specification.

6.2 This specification covers the design of type UG–977C/U connector adapter which was previously covered by Bureau of Ships Drawing REB49126.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—SigC
Navy—Ships
Air Force

Preparing activity:
Army—SigC

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:58Z
Check the source to verify that this is the current version before use.