INCH-POUND

MIL-DTL-27434/21A
22 May 2008
SUPERSEDING
MIL-A-27434/21
28 September 1960

DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, SERIES BNC to SERIES SM TYPE UG-691/U

Inactive for new design after 19 February 1982

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27434.

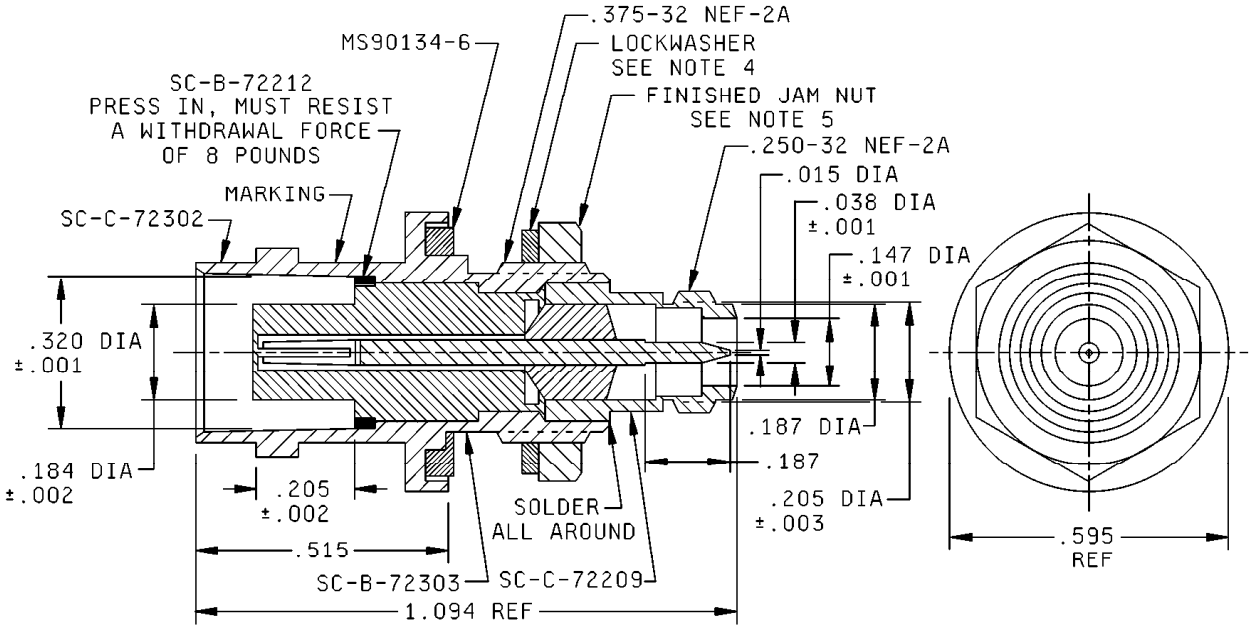

Inches	mm	Inches	mm
.001	0.03	.184	4.67
.002	0.05	.205	5.21
.003	0.08	.320	8.13
.015	0.38	.515	13.08
.038	0.97	.595	15.11
.147	3.73	1.094	27.79

FIGURE 1. Type UG–691/U connector adapter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:56Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified dimensional tolerances are ±.005 inches.
4. The lockwasher shall have the following characteristics: externally toothed, phosphor bronze, silver plated, 0.398 inch maximum and 0.384 inch minimum inside diameter; 0.694 inch maximum and 0.670 minimum outside diameter.
5. The finished jam nut shall have the following characteristics: .375-32 UNEF-2B, brass, 0.551 inch minimum across flats, 0.093 inch thick.

FIGURE 1. Type UG–691/U connector adapter – Continued.

ENGINEERING DATA:

Impedance: 50 ohms, nominal.

Voltage rating: 100 V rms, maximum at sea level.

Temperature rating: -65º C to +165º C.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating characteristics: Series BNC socket contact in accordance with MIL-STD-348, and series SM pin contact interface shall be in accordance with MIL-DTL-27434 after assembly.

Corrosion: Applicable.

Vibration: Applicable.

Shock: Applicable.

Leakage: The adapter shall be subjected to a gage pressure test of 50 pounds per square inch applied at one end, and the whole adapter immersed in water at 20ºC. The adapter shall remain immersed in water for at least 20 seconds.

When the adapter is under test there shall be no evidence of loss of pressure as detected by escaping air bubbles.

Part or Identifying Number (PIN): UG-691/U.

Supersession: This document supersedes drawing MS35114 (SigC).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:56Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-STD-348
SC-C-72209
SC-C-72302
SC-B-72212
SC-B-72303

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy - SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-2007-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:56Z
Check the source to verify that this is the current version before use.