INCH-POUND

MIL-DTL-27434/28A
w/AMENDMENT 1
9 September 2022
SUPERSEDING
MIL-DTL-27434/28A
22 May 2008

DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, SERIES BNC to SERIES QDS TYPE UG-1136/U

Inactive for new design after 19 February 1982

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27434.

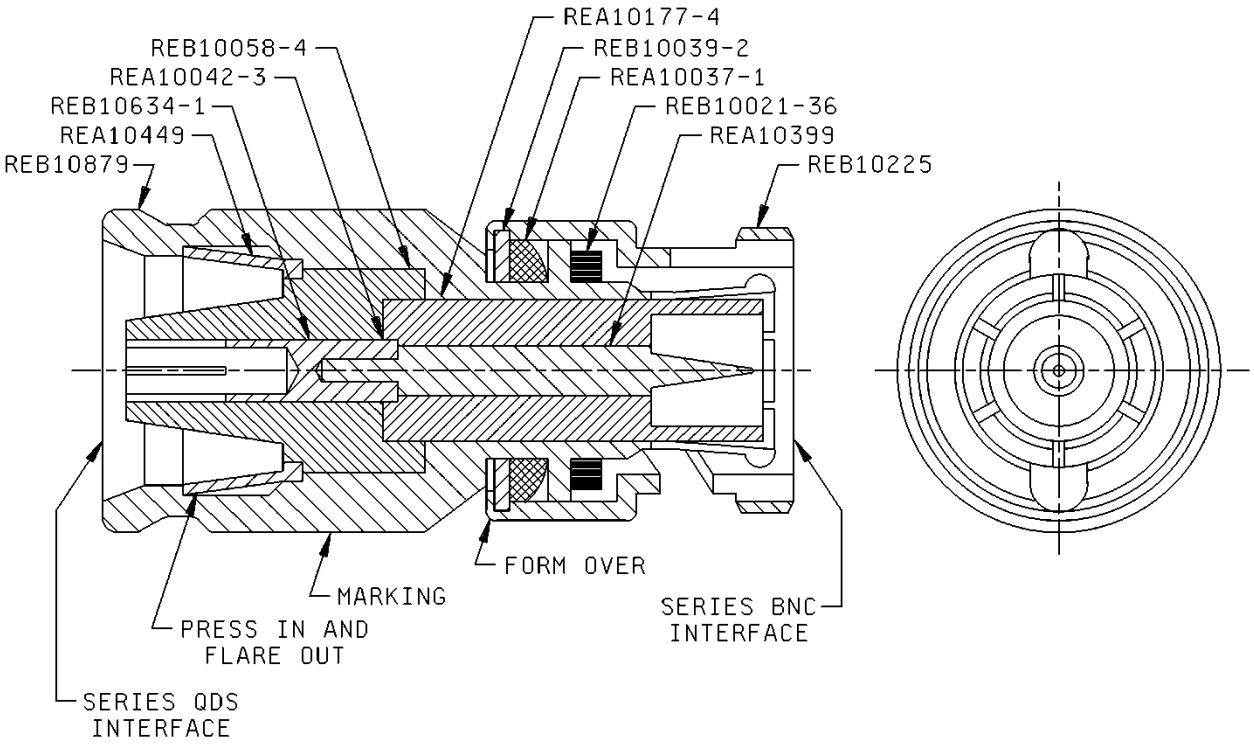


FIGURE 1. Type UG–1136/U connector adapter.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:58Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Impedance: 50 ohms, nominal.

Frequency range: Frequency range: 0 to 2 GHz.

Voltage rating: 500 V rms, maximum at sea level.
125 V rms, maximum at 70,000 feet.

Temperature rating: -65º C to +165º C.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating characteristics: Series BNC pin contact in accordance with MIL-STD-348, and series QDS socket contact interface shall be in accordance with MIL-DTL-27434 after assembly.

Contact gage test (series QDS only):

The center contact shall be subjected to the following gage test prior to assembly into the adapter. The pins that are used in the performance of these tests may be tapered at theirs ends to facilitate insertion, but the tapered portions shall not be included in the specified dimensions.

A pin 0.100 inch minimum in diameter shall be inserted to a depth of 0.125 inch minimum, and then removed. The contact shall be then tested as follows:

a. A pin 0.074 inch minimum in diameter shall be inserted to a depth of 0.200 inch minimum shall not deflect the contact members.

b. A pin 0.080 inch maximum in diameter inserted to depth of 0.125 inch minimum shall make contact with all four contact members within 0.015 inch of their tip ends.

c. A pin 0.093 inch minimum in diameter inserted to a depth of 0.062 inch minimum shall not cause the contact members to bow perceptibly.

Dielectric withstanding voltage: MIL-STD-202-301, 1,500 V rms minimum at sea level.

Corrosion: Applicable.

Vibration: Applicable.

Shock: Applicable.

Part or Identifying Number (PIN): UG-1136/U.

Supersession: This document supersedes drawing REB49306.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:58Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-STD-202-301
MIL-STD-348
REA10399
REA10449
REB10225
REB10879
REB49306

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-096)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:58Z
Check the source to verify that this is the current version before use.