**INACTIVE FOR NEW DESIGN**

INCH-POUND
MIL-DTL-27434/32B
9 January 2003
SUPERSEDING
MIL-A-27434/32A
25 March 1966

DETAIL SPECIFICATION SHEET

# ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, TYPE UG–1144/U (SERIES N TO QDS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the adapter described herein shall consist of this document and the latest issue of MIL-A-27434.

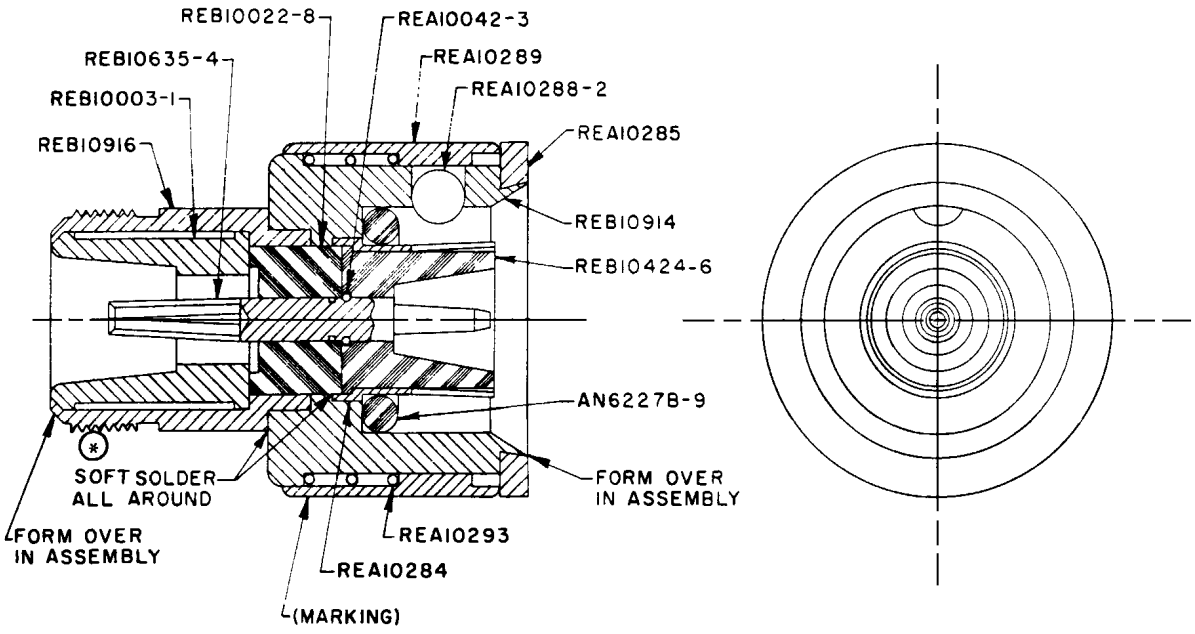


FIGURE 1. Type UG–1144/U connector adapter.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:59Z
Check the source to verify that this is the current version before use.




| Inches | millimeters |
|---|---|
| .001 | 0.02 |
| .002 | 0.05 |
| .093 | 2.36 |
| .200 | 5.08 |
| .288 | 7.31 |
| .413 | 10.49 |
| .625 | 15.87 |

Notes:
1. Dimensions are in inches.

FIGURE 2. Series QDS Pin Contact Interface.

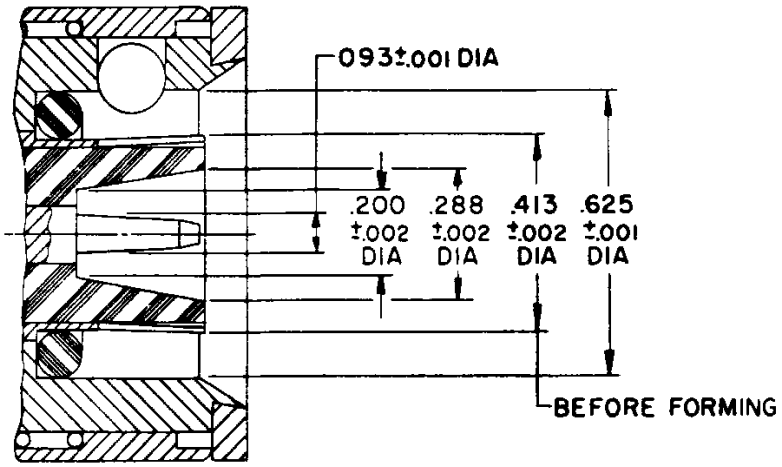

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:59Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: In accordance with Figure 1 and the following drawings:

SAE-AS28775 – Packing, Preformed, Hydraulic, +275 DEG. F. (“O” RING)
REB10003 – Bushing
REB10022 – Insulator
REB10042 – Ring
REA10284 – Contact
REA10285 – Flange
REA10288 – Ball Bearing
REA10289 – Sleeve
REA10293 – Spring
REB10424 – Insulator
REB10635 – Contact
REB10914 – Body
REB10916 – Body

Mating characteristics: Series N interface shall be in accordance with MIL-STD-348. Series QDS interface shall be in accordance with figure 2.

Gage tests for contacts: The specified contact shall meet the gage tests for contacts specified in MIL-A-27434. The outer contact shall meet the gage test as specified in MIL-A-27434 prior to assembly into the connector adapter (QDS only).

Spring finger contact members shall make contact within .0312 inch of their tip ends, with a ring having an inside diameter of .420 inch minimum. All contact members shall then enter a ring having as inside diameter of .428 inch maximum when a pressure of not more than 1 pound is applied.

Part or Identifying Number (PIN): UG-1144/U

Supersession: This document supersedes Navy drawing REB49321

## CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Review activities:
Air Force – 99
Navy - SH

Preparing activity:
DLA - CC

(Project 5935-4520-003)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:59Z
Check the source to verify that this is the current version before use.