INCH-POUND

INACTIVE FOR NEW DESIGN

MIL-DTL-27434/33A
9 January 2003
Superseding
MIL-A-27434/33
28 September 1960

DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIOFREQUENCY, BETWEEN SERIES, TYPE UG–1146/U (SERIES BNC TO QDS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the adapter described herein shall consist of this document and the latest issue of MIL-A-27434.

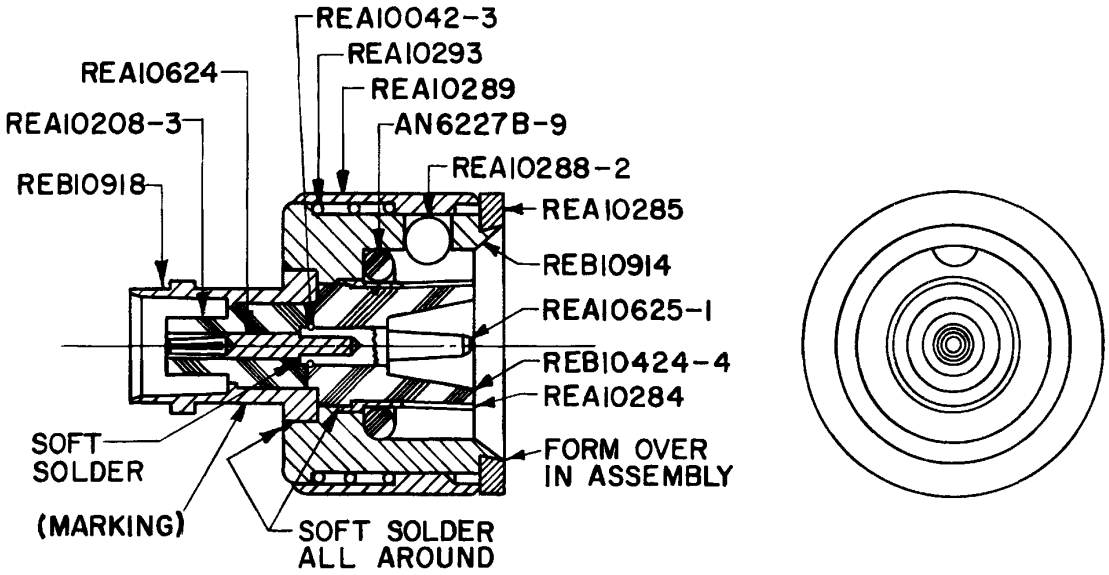

FIGURE 1. Type UG–1146/U connector adapter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:00Z
Check the source to verify that this is the current version before use.

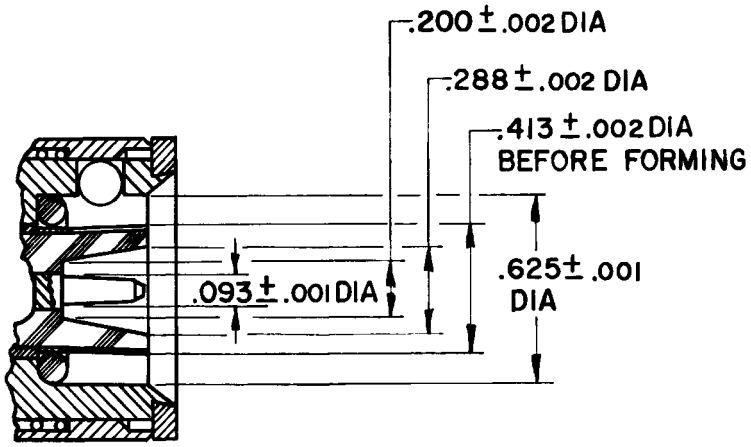

Inches	millimeters
.001	0.02
.002	0.05
.093	2.36
.200	5.08
.288	7.31
.413	10.49
.625	15.87

FIGURE 2. Series QDS Pin Contact Interface.

1. All dimensions are I inches.
2. Unless otherwise specified, tolerances are +/- 0.005 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:00Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: In accordance with Figure 1 and the following drawings:

SAE-AS28775 – Packing, Preformed, Hydraulic, +275 DEG. F. (“O” RING)
REA10042 – Ring
REA10208 – Insulator
REA10284 – Contact
REA10285 – Flange
REA10288 – Ball Bearing
REA10289 – Sleeve
REA10293 – Spring
REB10424 – Insulator
REA10624 – Contact
REA10625 – Contact
REB10914 – Body
REB10918 - Body

Mating characteristics: Series BNC interface shall be in accordance with MIL-STD-348. Series QDS interface shall be in accordance with figure 2.

Gage tests for contacts: The specified contact shall meet the gage tests for contacts specified in MIL-A-27434 paragraphs 4.2 and 4.2.1. The outer contact shall meet the gage test as specified in MIL-A-27434 paragraph 4.2 1 prior to assembly into the connector adapter (QDS only).

Spring finger contact members shall make contact within .0312 inch of their tip ends, with a ring having an inside diameter of .420 inch minimum. All contact members shall then enter a ring having as inside diameter of .428 inch maximum when a pressure of not more than 1 pound is applied.

Part or Identifying Number (PIN): UG-1146/U

Supersession: This document supersedes Navy drawing REB49323

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Review activities:
Air Force – 99
Navy - SH

Preparing activity:
DLA - CC

(Project 5935-4520-004)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:00Z
Check the source to verify that this is the current version before use.