INCH-POUND


MIL-DTL-3943/140C
6 January 2010
SUPERSEDING
MIL-DTL-3943/140B
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, EXEMPLARY CIVILIAN SERVICE AWARD, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

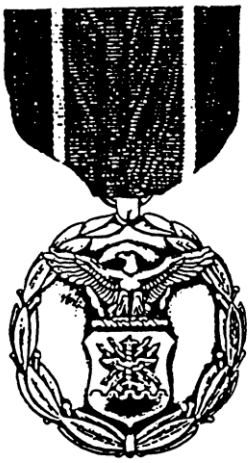

OBVERSE



REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH: Oxidized, Relieved, Polished Highlights

DIMENSIONS:
HEIGHT (including lug):
-1: 1-5/8 inches (REF)
-2: 13/16 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:02Z
Check the source to verify that this is the current version before use.

DIAMETER:
-1: 1-1/2 inches (REF)
-2: 3/4 inch (REF)

THICKNESS (at thickest point):
-1: 0.170 inch ± 0.010 inch
-2: 0.120 inch ± 0.010 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

3. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/353.

4. The lapel button shall conform to MIL-DTL-11484/181.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 99
DLA - CT

(Project No. 8455-2010-045)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:02Z
Check the source to verify that this is the current version before use.