NOT MEASUREMENT SENSITIVE


MIL-D-3943/142
4 November 1992

MILITARY SPECIFICATION SHEET

DECORATION, CIVILIAN CAREER SERVICE AWARD, DEFENSE COMMISSARY AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

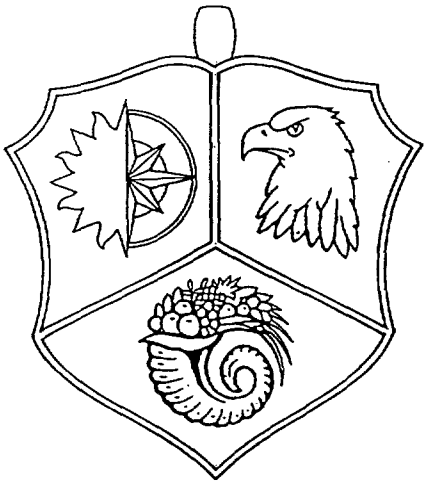

OBVERSE



REVERSE

MATERIAL: Gilding metal

DASH NO:
-1: Regular size
-2: Miniature size

DIMENSIONS:
HEIGHT (Including lug):
-1: 1-37/64 inches (4.01 cm) (REF)
-2: 25/32 inch (1.98 cm) (REF)
WIDTH (Overall):
-1: 1-3/8 inches (3.49 cm) (REF)
-2: 11/16 inch (1.75 cm) (REF)

THICKNESS (At edge):
-1: .100 inch ± .010 inch (0.254 cm ± 0.025 cm)
-2: .080 inch ± .010 inch (0.203 cm ± 0.025 cm)

FINISH: Oxidized, Relieved, Polished Highlights

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:03Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The reverse shall be suitable for engraving.

3. Decoration set shall consist of a regular size medal, a miniature size medal, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type XVI with a Class 2 pad.

4. The ribbon for the pendant drape shall conform to MIL-R-11589/367.

5. The lapel button shall conform to MIL-L-11484/189.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0690)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:03Z
Check the source to verify that this is the current version before use.