MILITARY STANDARD
TRUCKLOADING
TORPEDO MK 44 AND MK 46 ASSEMBLIES
IN CONTAINER MK 197 MOD 1

To all holders of MIL-STD-1320-12A (NAVY).

PAGE 8 - Replace unitizing procedure with the following revised procedure.

1. USING A FORK LIFT TRUCK, PLACE ONE UNIT LOAD ON TOP OF ANOTHER. BE SURE TO ALIGN THE STACKING FEATURES.
2. STRAP UNIT LOADS TOGETHER BY THREADING THE STRAPS, ITEM 1, UNDER THE ROUNDED SHELLS OF THE BOTTOM CONTAINERS AND OVER THE ROUNDED SHELLS OF THE TOP CONTAINERS AS SHOWN BELOW.
3. REPEAT PROCEDURE FOR THIRD UNIT LOAD IF REQUIRED.

PAGE 8 - List of Materials

Change the length of item 1 from 11 ft to 15 ft.

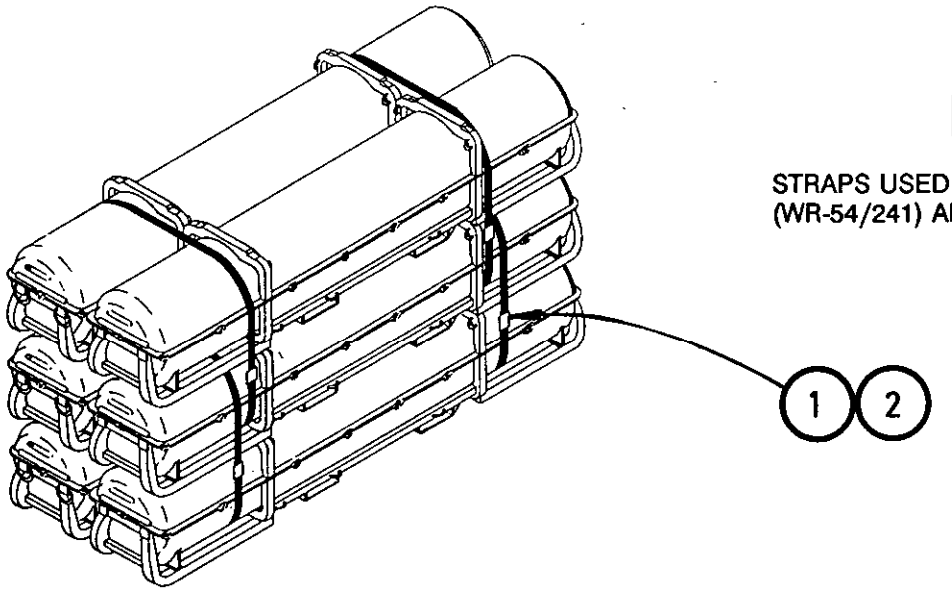

NOTE

STRAPS USED FOR UNIT LOAD (WR-54/241) ARE REMOVED FOR CLARITY.

AMSC No. - NA

Distribution statement A
Approved for public release;
distribution is unlimited.

Review activity:
Navy - OS

Preparing activity
Navy - OS
(Project No. 8140-N1013)
FSC 8140

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:42Z
Check the source to verify that this is the current version before use.