
MIL-C-39029/45D
15 November 1988
SUPERSEDING
MIL-C-39029/45C
9 April 1987

MILITARY SPECIFICATION SHEET


CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE (FOR MIL-C-5015 SERIES MS3400 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of specification MIL-C-39029.

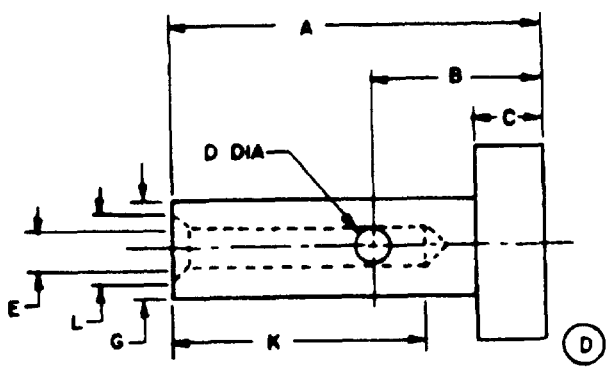

SIZE 16-22 CRIMP WIRE BARREL

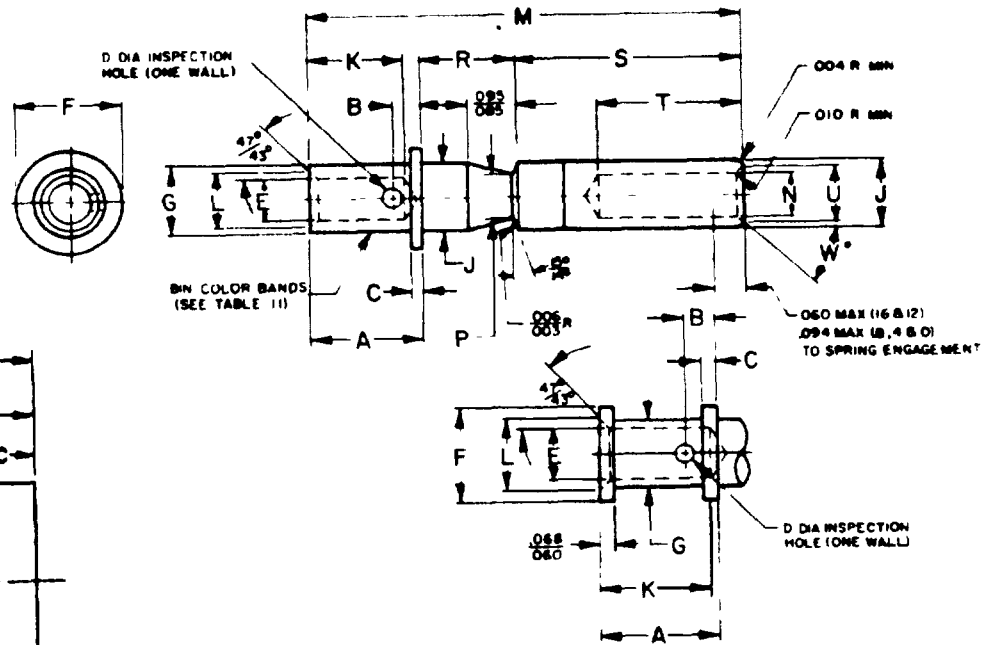

SIZE 8,4 AND 0 WIRE BARREL

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Manufacturers are permitted to supply MIL-C-39029/45A size 16-22 contacts until 15 May 1989 or deplete their inventory, whichever comes first.

(D) Denotes changes.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions. (D) (D) (D)

BIN Code	E Dia	F Dia	J Dia	M Ref	N Dia	P Dia	R	S	T Min	U Min	W°	A	B	C	D Dia	G Dia	K	L
294	.0355 .0335	.148 (3.76)	.113	1.272	.064 1/	.087			.510	.086		.285 .280	.106 .100	.042 .036	.032 .026	.078 .076	.206 .216	.067 .061
295	.068 .066	.133 (3.38)	.110	1.286 (32.66)		.083						.298 .294						
296		.202 (5.13)	.161		.0955 1/	.135	.169 .165	.808 .798		.125	53 43		.079 .073		.042 .036	.105 .101	.281 .250	.090 .080
297	.102 .098	.159 (4.80)	.158			.131								.046 .044		.153 .147		.125 .115
298	.184 .179	.313 (7.95) .309 (7.85)	.252 .249	1.505 (38.23)	.149 .145	.225 .221			.625	.193		.520 .510	.094 .084		.066 .060	.269 .263	.534 .480	.230 .220
299	.285 .279	.419 (10.64) .409 (10.39)	.336 .333		.232 .228	.310 .307	.253	.744		.280	31 29					.380 .370		.364 .354
300	.453 .451	.611 (15.52) .601 (15.27)	.518 .515	1.660 (42.16)	.364 .360	.492 .489	.249	.734		.386		.675 .665				.568 .558	.690 .636	.542 .532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
.026	.66	.098	2.49	.230	5.84	.419	10.64
.029	.74	.101	2.57	.232	5.89	.451	11.46
.032	.81	.102	2.59	.249	6.33	.458	11.63
.033	.84	.105	2.67	.250	6.35	.480	12.19
.036	.91	.110	2.74	.252	6.40	.489	12.42
.042	.61	.113	2.79	.253	6.43	.492	12.50
.044	1.12	.115	2.92	.263	6.68	.510	12.95
.048	1.22	.125	3.18	.269	6.83	.515	13.08
.050	1.27	.131	3.33	.279	7.09	.518	13.16
.057	1.45	.133	3.38	.280	7.11	.520	13.21
.060	1.52	.135	3.43	.281	7.14	.532	13.51
.063	1.6	.145	3.68	.286	7.26	.534	13.56
.064	1.63	.147	3.73	.294	7.47	.542	13.77
.066	1.68	.148	3.76	.298	7.57	.558	14.17
.068	1.73	.149	3.78	.307	7.80	.568	14.43
.070	1.78	.153	3.89	.309	7.85	.601	15.27
.073	1.85	.158	4.01	.310	7.87	.611	15.52
.076	1.93	.161	4.09	.313	7.95	.625	15.88
.078	1.98	.179	4.55	.333	8.46	.636	16.15
.079	2.00	.184	4.67	.336	8.53	.690	17.53
.083	2.11	.185	4.70	.354	8.99	.734	18.64
.084	2.13	.189	4.80	.360	9.14	.744	18.90
.086	2.18	.193	4.90	.364	9.25	.798	20.27
.087	2.21	.202	5.13	.370	9.40	.808	20.52
.090	2.29	.220	5.59	.380	9.65	1.286	32.66
.094	2.39	.225	5.72	.386	9.80	1.505	38.23
.0955	2.43	.228	5.74	.409	10.39	1.660	42.16

TABLE II. Design characteristics.

BIN Code	Color Bands			Mating End Size	Wire Barrel Size	Type Size	Class
	1st	2nd	3rd				
294	Red	White	Yellow	16	22		
295	Red	White	Green	16	16		
296 1/	Red	White	Blue	12	16		
297	Red	White	Violet	12	12	A	B
298	Red	White	Gray	8	8		
299	Red	White	White	4	4		
300	Orange	Black	Black	0	0		

1/ 296 shall meet all applicable test requirements for size 12-14 in MIL-C-39029.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

TABLE III. Tools.

BIN Code	Basic Crimping Tool	Die Set	Locator	Positioner	Installing Tool	Removal Tool
294	M22520/1-01	---	---	M22520/1-02 Blue	M81969/17-09	M81969/19-01
295	M22520/1-01	---	---	M22520/1-02 Blue	M81969/17-01	M81969/19-01
296	M22520/1-01	---	---	M22520/1-02 Yellow	M81969/17-02	M81969/19-02
297	M22520/1-01	---	---	M22520/1-02 Yellow	M81969/17-02	M81969/19-02
298	M22520/23-01	M22520/23-02	M22520/23-09	---	M81969/17-06	M81969/19-03
299	M22520/23-01	M22520/23-04	M22520/23-11	---	M81969/17-07	M81969/19-04
300	M22520/23-01	M22520/23-05	M22520/23-13	---	M81969/17-08	M81969/19-05

TABLE IV. Size 16-22 crimp wire barrel selector data.

Wire Size	Selector No.
22	3
24	2
26	1

REQUIREMENTS:

Dimensions, design characteristics and configuration: See figure and Tables I and II.

Tools: See Table III.

Vibration: Method 2005 of MIL-STD-1344A, test condition III; following the test the contacts shall be tested for endurance in accordance with MIL-STD-167-1 (SHIPS).

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Mating contact: MIL-C-39029/44.

QPL evaluating activity: Naval Avionics Center, Code B-714, Indianapolis, IN 46219-2189.

International interest: NEPR 57.

Military part number: See Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

TABLE V. Military part number.

BIN Code	Military Part Number	Supersedes
294	M39029/45-294	MS90454-16-22
295	M39029/45-295	MS90454-16-16
296	M39029/45-296	MS90454-12-16
297	M39029/45-297	MS90454-12-12
298	M39029/45-298	MS90454-8-8
299	M39029/45-299	MS90454-4-4
300	M39029/45-300	MS90454-0-0

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MU, MI
Navy - EC, MC
Air Force - 11, 99
DLA - ES

User activities:
Navy - SH

Preparing activity:
Navy - AS
(Project No. 5935-3719-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.