

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-22992 CLASS L CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

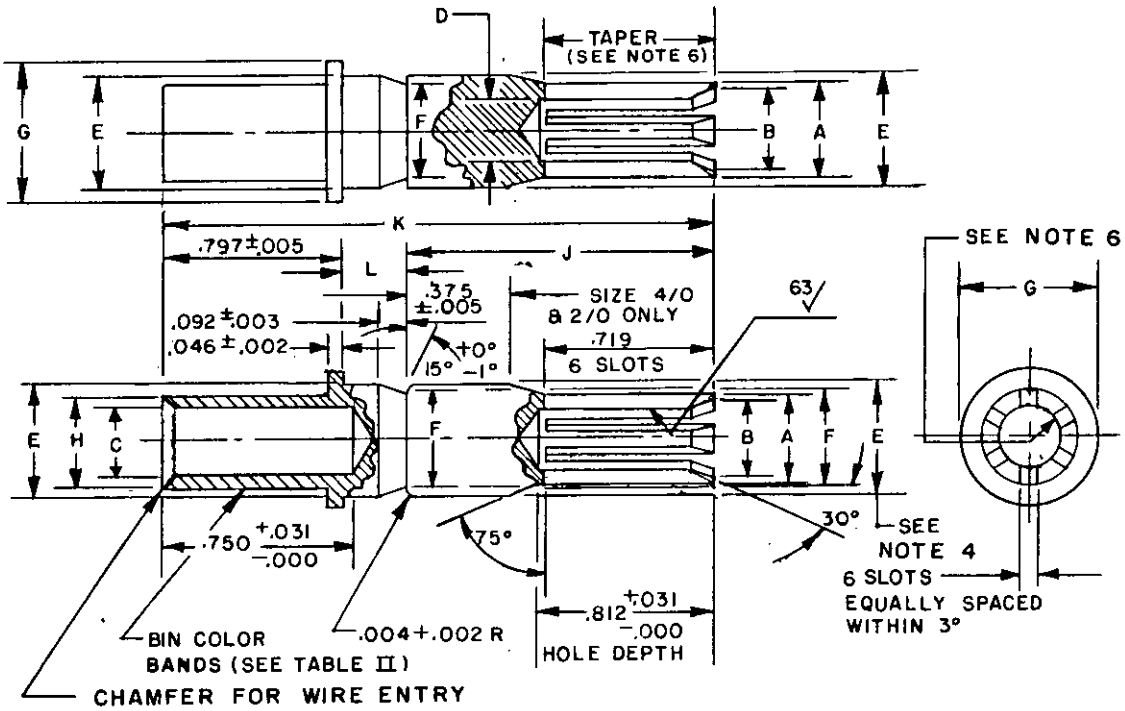

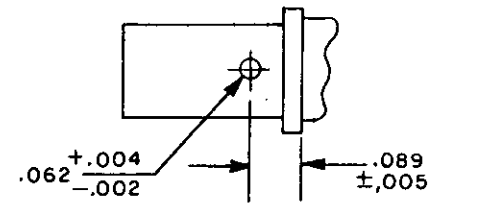

WIRE BARREL

INCHES	MM
.000	0.00
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.031	0.79
.046	1.17
.062	1.57
.089	2.26
.092	2.34
.375	9.53
.750	19.05
.797	20.24
.812	20.62

FIGURE 1. Dimensions and configuration.

Ⓓ denotes changes

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	0.03	.180	4.57	.342	8.69	.516	13.11	.654	16.61	1.158	29.41
.002	0.05	.227	5.77	.374	9.50	.541	13.74	.680	17.27	1.283	32.59
.003	0.08	.251	6.38	.408	10.36	.586	14.88	.688	17.48	1.752	44.50
.004	0.10	.287	7.29	.417	10.59	.609	15.47	.723	18.36	2.206	56.03
.005	0.13	.312	7.92	.472	11.99	.629	15.98	.748	19.00	2.393	60.78
		.313	7.95	.502	12.75	.635	16.13	.750	19.05	2.862	72.70
		.334	8.48	.506	12.85	.641	16.28	.781	19.84		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions shown apply after plating.
4. (D) Locating on the E diameter, the center of each spring leaf, within .062 of its slotted end, shall be within .015 TIR after forming.
5. Taper shall be uniform within .002.
6. Inside edges of slots to be free of burrs.
7. Unless otherwise specified, tolerances are ±.010 inches and ±2°.
8. To properly crimp a wire of a smaller gauge than the contact wire barrel, the appropriate MS 3448 bushing must be used.
9. Manufacturer's trademark location optional.

TABLE I. Dimensions.

BIN code	A DIA		B DIA MIN	C DIA		D DIA MIN	E DIA +.002 -.001	F DIA		G DIA		H DIA		J ±.005	K REF	L ±.002
329	.312	+.002 -.001	.287	.234	±.002	.180	.312	.286	±.002	.342	±.002	.312	±.002	1.158	2.206	.251
330	.312		.287	.234		.180	.312	.286		.342		.312		1.752	2.862	.313
331	.334		.306	.281		.227	.334	.308		.417		.374		1.158	2.206	.251
332	.334		.306	.281		.227	.334	.308		.417		.374		1.752	2.862	.313
333	.516		.472	.406	+.004 -.003	.359	.516	.490	+.002 -.005	.609	±.003	.506	+.004 -.003	1.283	2.393	.313
334	.586	±.002	.541	.500		.408	.654	.629		.688		.609		1.283	2.393	.313
335	.680		.635	.641		.502	.748	.723		.781		.750		1.283	2.393	.313

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and tables I and II.

Tools: See table III.

Probe damage: Probe damage shall be performed in accordance with MIL-STD-1344, method 2006.2, type 2 fixturing (insert typeholding device) using Mil-C-22992, class L connectors.

Vibration: In accordance with method 2005 of MIL-STD-1344, test condition III. The following detail and exceptions shall apply.

a. Normal locking means only, no safety wire shall be used.

b. The cable or wire bundle shall be clamped to nonvibrating points at least 8 inches from the rear of the connectors. The clamping length may be selected or changed to avoid resonance of the cable or wire.

c. The system ground contacts of class L grounding connectors shall not be wired into the series monitoring circuit.

Shock: MIL-C-39029/49 contacts shall be tested in accordance with the drop test (class L) and high impact shock test as specified in MIL-C-22992, using a MIL-C-22992 qualified connector that has been approved for listing on the applicable qualified products list.

Mating contact: MIL-C-39029/48.

Material: Copper alloy CDA191 or equivalent.

Finish: Silver plate .0002 inch thick minimum in accordance with QQ-S-365. Use underplate of .00005 inch minimum nickel in accordance with QQ-N-290.

Concentricity: .004 TIR(RFS), machined surfaces 63 $\overline{V}$ unless otherwise specified.

Contacts may be soldered or crimped.

Ⓓ Qualification: Shall include the crimping of these contacts utilizing MS3448 bushings to accommodate smaller wire sizes.

QPL evaluating activity: Defense Electronics Supply Center (DESC-E), Dayton, Ohio 45444.

International interest: NEPR 57, class L only.

Ⓓ Military part number: See table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

Bin code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
329	Orange	Red	White	6	6	A	A
330	Orange	Orange	Black	6G 1/	6		
331	Orange	Orange	Brown	4	4		
332	Orange	Orange	Red	4G 1/	4		
333	Orange	Orange	Orange	1/0	1		
334	Orange	Orange	Yellow	2/0	2/0		
335	Orange	Orange	Green	4/0	4/0		

1/ "G" designation indicates a grounding socket.

Ⓓ TABLE III. Tools.

Bin code	Basic crimping tool	Locator	Die assembly 1/	Removal tool
329 and 330	M22520/23-01	M22520/23-10	M22520/23-03	M81969/27-06
331 and 332	M22520/23-01	M22520/23-12	M22520/23-04	M81969/27-05
333 2/	M22520/23-01	M22520/23-14	M22520/23-05	M81969/27-03
334 2/	M22520/23-01	M22520/23-15	M22520/23-06	M81969/27-02
335 2/	M22520/23-01	M22520/23-16	M22520/23-07	M81969/27-01

1/ Installing tools are not necessary with those contacts.

2/ When crimping contacts using a MS3348-1-6L or MS3348-4/0-2/0L bushings use the 400-B-1 tool only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

Ⓓ TABLE IV. Allowable wire barrel - wire size combinations.

Bin code	Wire barrel size	Allowable wire size	Required bushing
329 and 330	6	6	----------
		8	MS3348-6-8L
		9	MS3348-6-9L
		10	MS3348-6-10L
331 and 332	4	4	----------
		5	MS3348-4-5L
		6	MS3348-4-6L
		8	MS3348-4-8L
333	1	1	----------
		2	MS3348-1-2L
		6	MS3348-1-6L
334	2/0	2/0	----------
335	4/0	4/0	----------
		2/0	MS3348-4/0-2/0L

Ⓓ TABLE V. Military part number.

Bin code	Military part number	Supersedes
329	M39029/49-329	MS90560-7
330	M39029/49-330	MS90560-8
331	M39029/49-331	MS90560-5
332	M39029/49-332	MS90560-9
333	M39029/49-333	MS90560-3
334	M39029/49-334	MS90560-2
335	M39029/48-335	MS90560-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - OS
Army - AT

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3466-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:37Z
Check the source to verify that this is the current version before use.