INCH-POUND

MIL-C-39029/63C
28 October 1995
SUPERSEDING
MIL-C-39029/63B
27 July 1987

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39029.


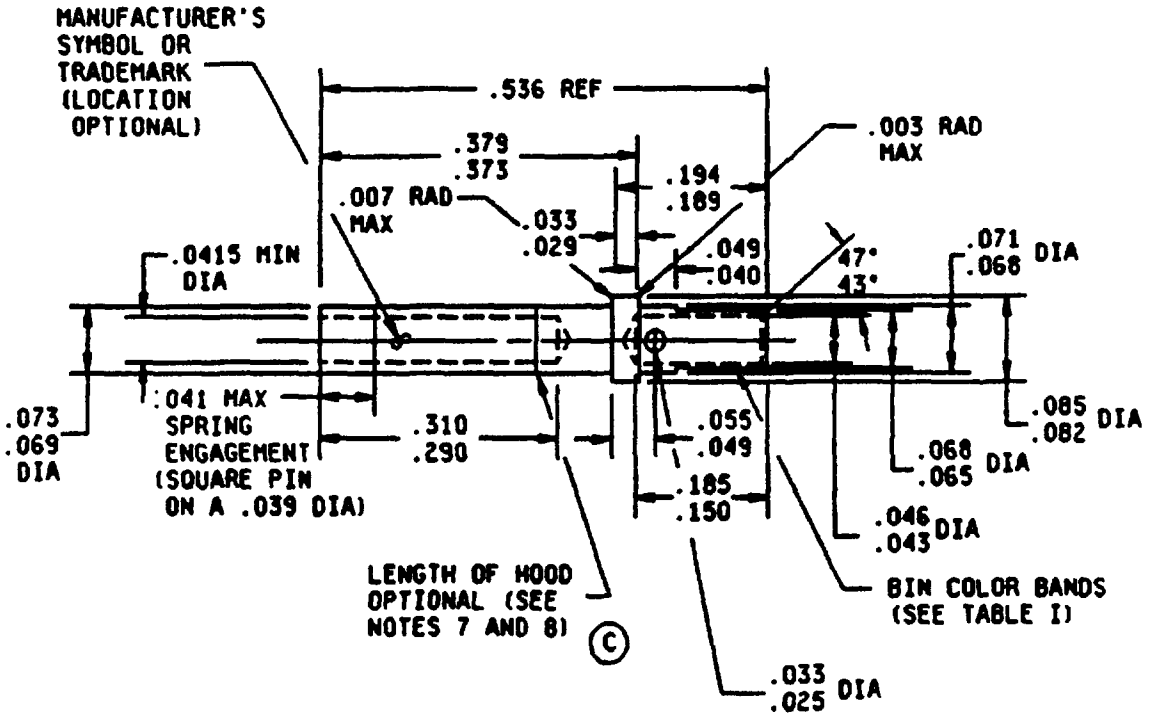


FIGURE 1. Dimensions and configuration.

© denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.

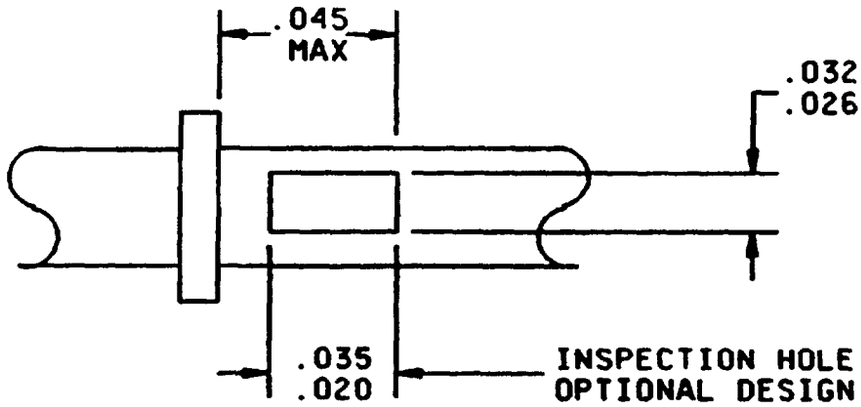

Inches	mm	Inches	mm
.003	0.08	.055	1.40
.007	0.18	.068	1.73
.020	0.50	.069	1.75
.025	0.64	.071	1.80
.026	0.66	.073	1.85
.029	0.74	.082	2.08
.032	0.81	.085	2.16
.033	0.84	.150	3.81
.035	0.89	.185	4.70
.039	0.99	.189	4.80
.040	1.02	.194	4.93
.041	1.04	.290	7.37
.0415	1.054	.310	7.87
.043	1.09	.373	9.47
.045	1.14	.379	9.63
.046	1.17	.536	13.61
.049	1.24		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions are after plating.
4. Machined surfaces to have 63 or better per USASI B46.1 unless otherwise specified.
5. Remove all burrs and sharp edges .003 (0.08 mm) maximum unless otherwise specified.
6. All diameters to be concentric with each other within .004 (0.10 mm) TIR.
7. (C) The mechanical pressure member shall be shrouded. Hoods, if used, shall conform to the requirements specified herein.
8. Maximum gap of .10 inch (2.54 mm) between hood and body of contact.
9. Patent notice. The Government has a royalty free license under the U.S. patents listed below for the benefit of manufacturers of the items disclosed and described herein, either for the Government or for use in equipment delivered to the Government.

Patent numbers

3110093 expires November 12, 1980
3158424 expires November 24, 1981

10. Copyright notice. All information disclosed in this specification sheet which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configurations: See figure 1 and table I

Tools: See table II.

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition E.

Mating contact: MIL-C-39029/64.

QPL evaluating activity. Defense Electronics Supply Center (DESC-E), Dayton, OH 45444.

International interest: NEPR 57.

Military part number. See table III.

TABLE I. Design characteristics

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
368	Orange	Blue	Gray	20	20	A	A

TABLE II Tools.

BIN code	Basic crimping	Positioner	Installing and removal tools
368	M22520/2-01	M22520/2-08	M81969/14-02 M81969/1-02

TABLE III. Military part number.

BIN code	Military part number	Supersedes
368	M39029/63-368	M24308/10-1

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
C Nasa - NA

(C) Review activities
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3936)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.