MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, (FOR MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the contact described herein shall consist of this specification and the latest issue of MIL-C-39029.

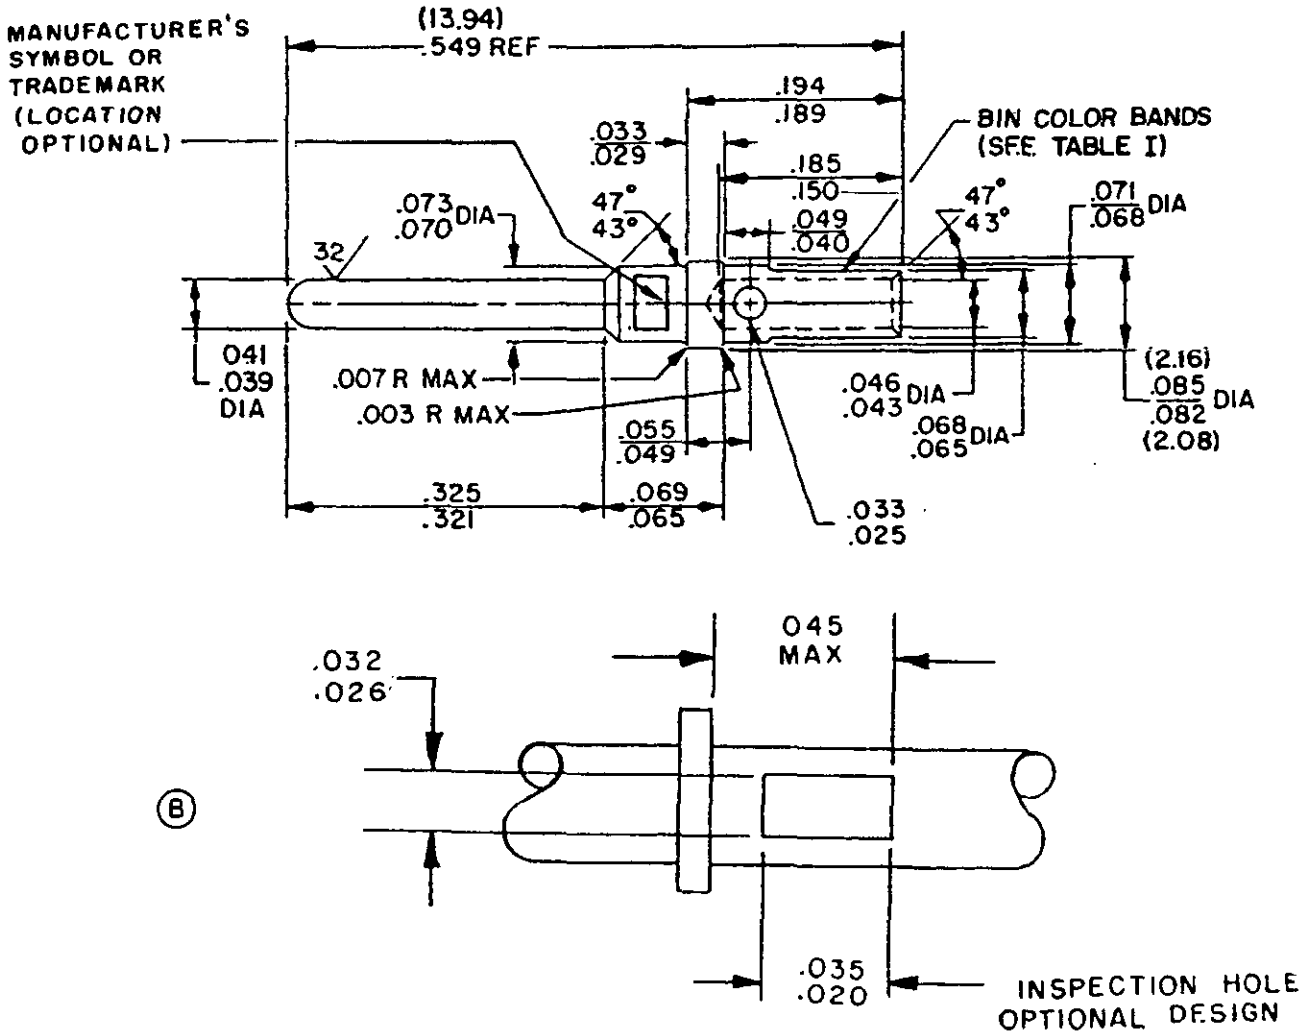


FIGURE 1. Dimensions and configuration.

Ⓑ denotes changes

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	.08	.055	1.40
.020	.50	.065	1.65
.025	.64	.069	1.75
.026	.66	.070	1.78
.029	.74	.071	1.80
.032	.81	.073	1.85
.033	.84	.082	2.08
.035	.89	.085	2.16
.039	.99	.150	3.81
.040	1.02	.185	4.70
.041	1.04	.189	4.80
.043	1.09	.194	4.93
.045	1.14	.321	8.15
.046	1.17	.325	8.26
.049	1.24	.549	13.94

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions are after plating.
4. Machined surfaces to have $\sqrt{63}$ or better per USASI B46.1 unless otherwise specified.
5. Remove all burrs and sharp edges .003 (.08 mm) maximum unless otherwise specified.
6. All diameters to be concentric with each other within .004 (.10 mm) TIR.
7. Patent notice. The government has a royalty free license under the U.S. patents listed below for the benefit of manufacturers of the items disclosed and described herein, either for the Government or for use in equipment delivered to the Government.

Patent numbers

3110093 expires November 12, 1980
3158424 expires November 24, 1981

8. Copyright notice. All information disclosed in this specification sheet which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools: See table II.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
369	Orange	Blue	White	20	20	A	A

TABLE II Tools.

BIN code	Basic crimping	Positioner	Installing and removal tools
369	M22520/2-01	M22520/2-08	M81969/14-02 M81969/1-02

Vibration: Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition E.

Mating contact: MIL-C-39029/63.

(B) QPL evaluating activity: Defense Electronics Supply Center (DESC-E), Dayton, OH 45444.

International interest: NEPR 57.

Military part number: See table III.

TABLE III. Military part number.

BIN code	Military part number	Supersedes
369	M39029/64-369	M24308/11-1

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, AR, MI
Navy - AS, SH
Air Force - 11, 17, 99

User activities:
Army - AV, ME
Navy - MC, OS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3640-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.