|INCH-POUND|


MIL-C-39029/64C
10 February 1992
SUPERSEDING
MIL-C-39029/64B
27 July 1987

MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, *PIN, CRIMP REMOVABLE, (FOR* MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

(C) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39029.

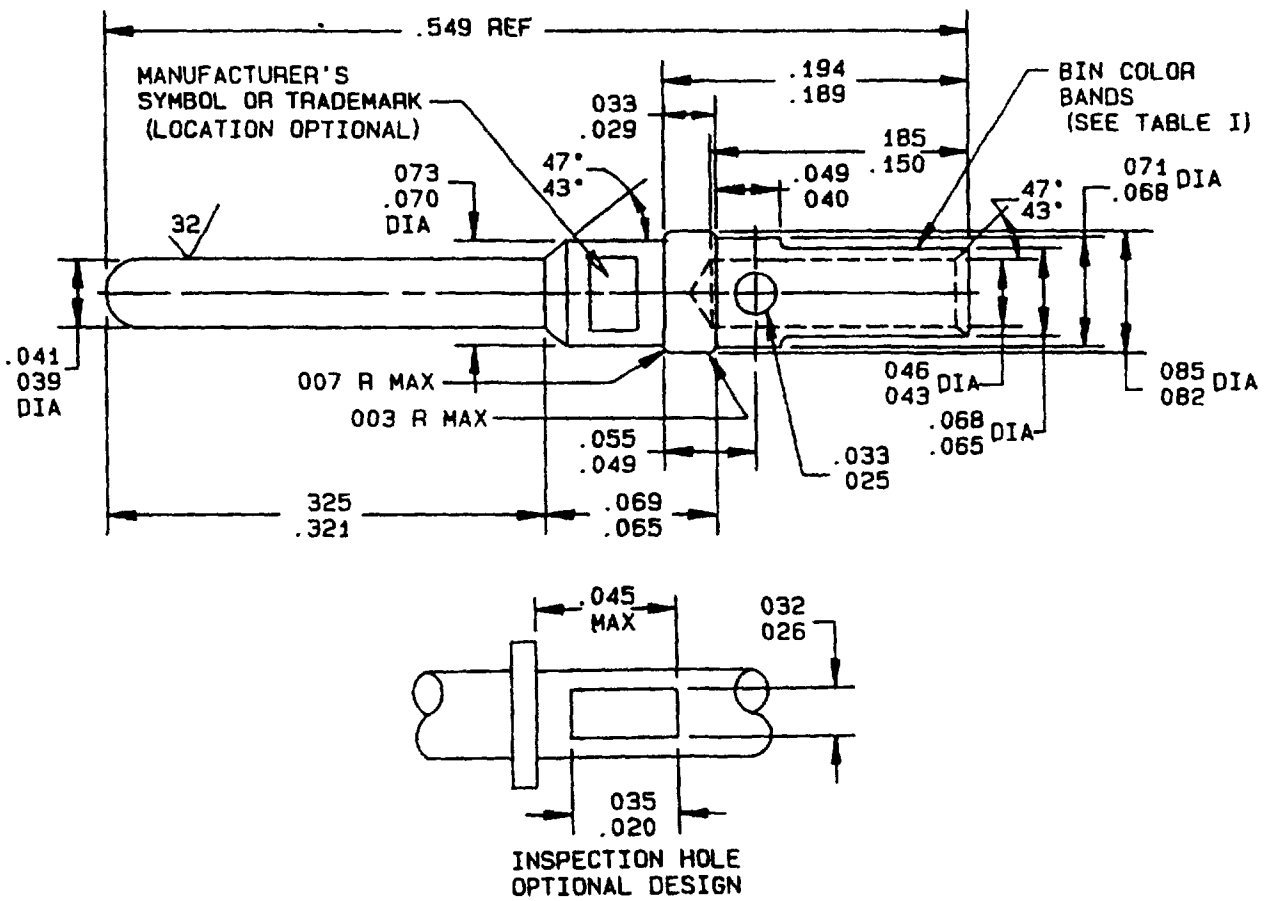

INSPECTION HOLE
OPTIONAL DESIGN

FIGURE 1 Dimensions and configuration

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	08	055	1 40
.020	50	.065	1 55
.025	.64	069	1 75
026	66	070	1.78
029	74	.071	1 80
.032	.81	073	1.85
.033	84	.082	2 08
035	89	085	2 16
039	99	150	3 81
040	1 02	185	4 70
041	1.04	189	4 80
.043	1 09	194	4 93
045	1 14	321	8 15
046	1 17	325	8 26
049	1 24	549	13 94

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Dimensions are after plating
4. Machined surfaces to have √63 or better per USASI B46 1 unless otherwise specified
5. Remove all burrs and sharp edges .003 (0 08 mm) maximum unless otherwise specified
6. All diameters to be concentric with each other within .004 (10 mm) TIR
7. Copy right notice All information disclosed in this specification sheet which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions, design characteristics, and configuration. See figure 1 and table I

Tools. See table II

TABLE I Design characteristics

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
369	Orange	Blue	White	20	20	A	A

TABLE II Tools.

BIN code	Basic crimping	Positioner	Installing and removal tools
(C) 369	M22520/2-01	M22520/2-08	M81969/39-01 M81969/1-02

Vibration. Method 2005 of MIL-STD-1344, test condition IV.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition E.

Mating contact MIL-C-39029/63

QPL evaluating activity. Defense Electronics Supply Center (DESC-E), Dayton, OH 45444

International interest. NEPR 57.

(C) Part or Identifying Number (PIN) See table III

TABLE III. PIN

BIN code	PIN	Supersedes
369	M39029/64-369	M24308/11-1

CONCLUDING MATERIAL

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, AT, MI
Navy - AS, SH
Air Force - 11, 99
DLA - ES

User activities
Army - AV, ME
Navy - MC, OS

Preparing activity.
Navy - EC

Agent
DLA - ES

(Project 5935-3823)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:39Z
Check the source to verify that this is the current version before use.