
MILITARY SPECIFICATION SHEET

CONNECTOR CONTACT, ELECTRICAL PIN,
CRIMP REMOVABLE, FOR MIL-C-85028(AS) CONNECTORS

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of MIL-C-39029

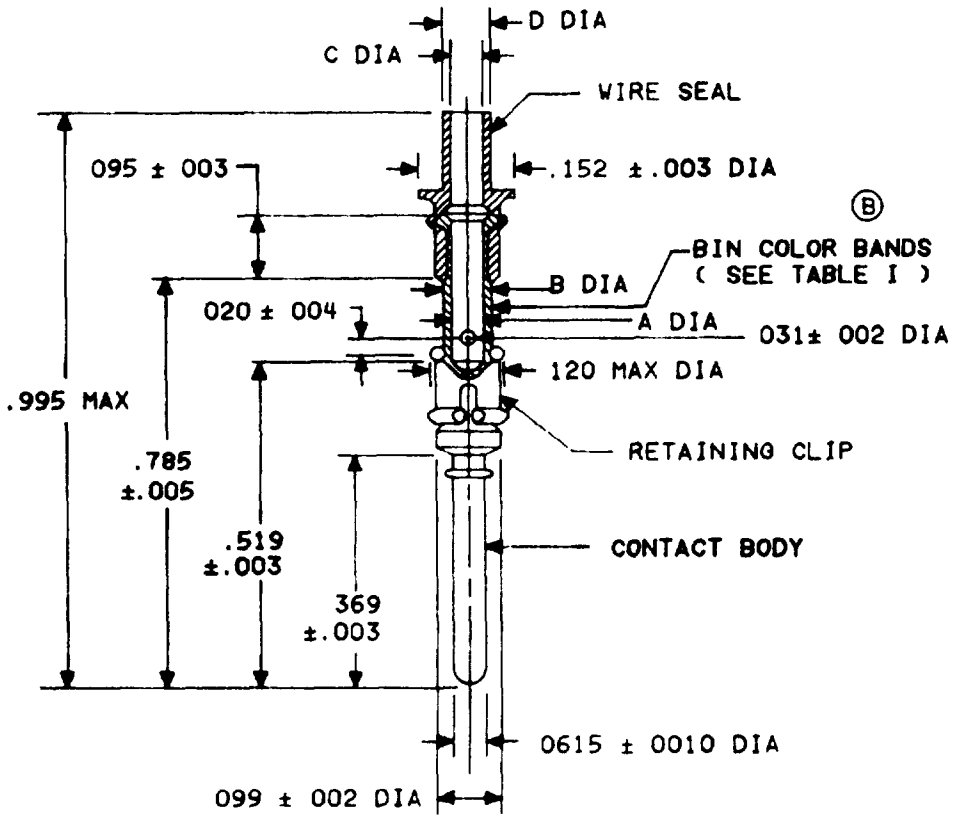

A DIA ± .002	B DIA ± .002	C DIA ± .002	D DIA ± .002
032	063	027	055
046	077	046	070
063	097	062	086

FIGURE 1 Connector contact

Ⓑ denotes change

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

Ⓑ

INCHES	MM	INCHES	MM
.0005	.01	.063	1.60
.002	.05	.070	1.78
.003	.08	.077	1.96
.004	.10	.080	2.03
005	.13	.086	2.18
.020	.51	.090	2.29
.027	.69	.095	2.41
031	.79	.097	2.46
.032	.81	.100	2.54
.035	.89	.119	3.02
.046	1.17	.152	3.86
.050	1.27	.369	9.37
.055	1.40	.519	13.18
.060	1.52	.785	19.94
.0615	1.56	.995	25.27
.062	1.58		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All diameters to be concentric with each other within .004 (.10 mm) TIR.
4. Dimensions shown apply after plating.

FIGURE 1 Connector contact - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1 and table I

Tools See table II

Mating contacts MIL-C-39029/69(AS)

Vibration Method 2005 of MIL-STD-1344, test condition IV

Shock (specified pulse) Method 2004 of MIL-STD-1344, test condition A

Part number See table III

QPL evaluating activity Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218

Ⓑ TABLE I Design characteristics

BIN code	Color bands			Mating end size	Wire barrel size	Wire range	Wire seal color	Insulation OD range	Type	Class
	1st	2nd	3rd							
387	orange	gray	violet	16	24	24-28	Red	041D to 055D	A	
388	orange	gray	gray	16	20	20-24	Lavender	051D to 070D	A	1/
389	orange	gray	white	16	16	16-20	Brown	066D to 087D	A	

1/ Maximum operating temperature 150 +3 , -0 C

TABLE II Tools

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
387 388 389	M22520/1-01	M22520/1-17	M81969/23-01	M81969/22-01

TABLE III Part numbers

BIN code	Part number	Supersedes
387	M39029/70-387	M39029/70-1
388	M39029/70-388	M39029/70-2
389	M39029/70-389	M39029/70-3

Custodian
Navy - AS

Review activities
Navy - EC
DLA - IS

Preparing activity
Navy - AS

Agent
DLA - ES

(Project 5935-N183-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-39029/70B(AS); CONNECTOR CONTACT, ELECTRICAL PIN, CRIMP REMOVABLE, FOR MIL-C-85028(AS) CONNECTORS

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

[ ] VENDOR [ ] USER [ ] MANUFACTURER

1 [ ] HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? [ ] IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102 LF 001 4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Engineering Specifications and Standards Dept.
(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.