
MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, REMOVABLE, SOLDERLESS WRAPPOST TERMINATION (FOR MIL-C-38999 SERIES I, II, III, AND IV, MIL-C-24308, MIL-C-83733, AND MIL-C-55302/69 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

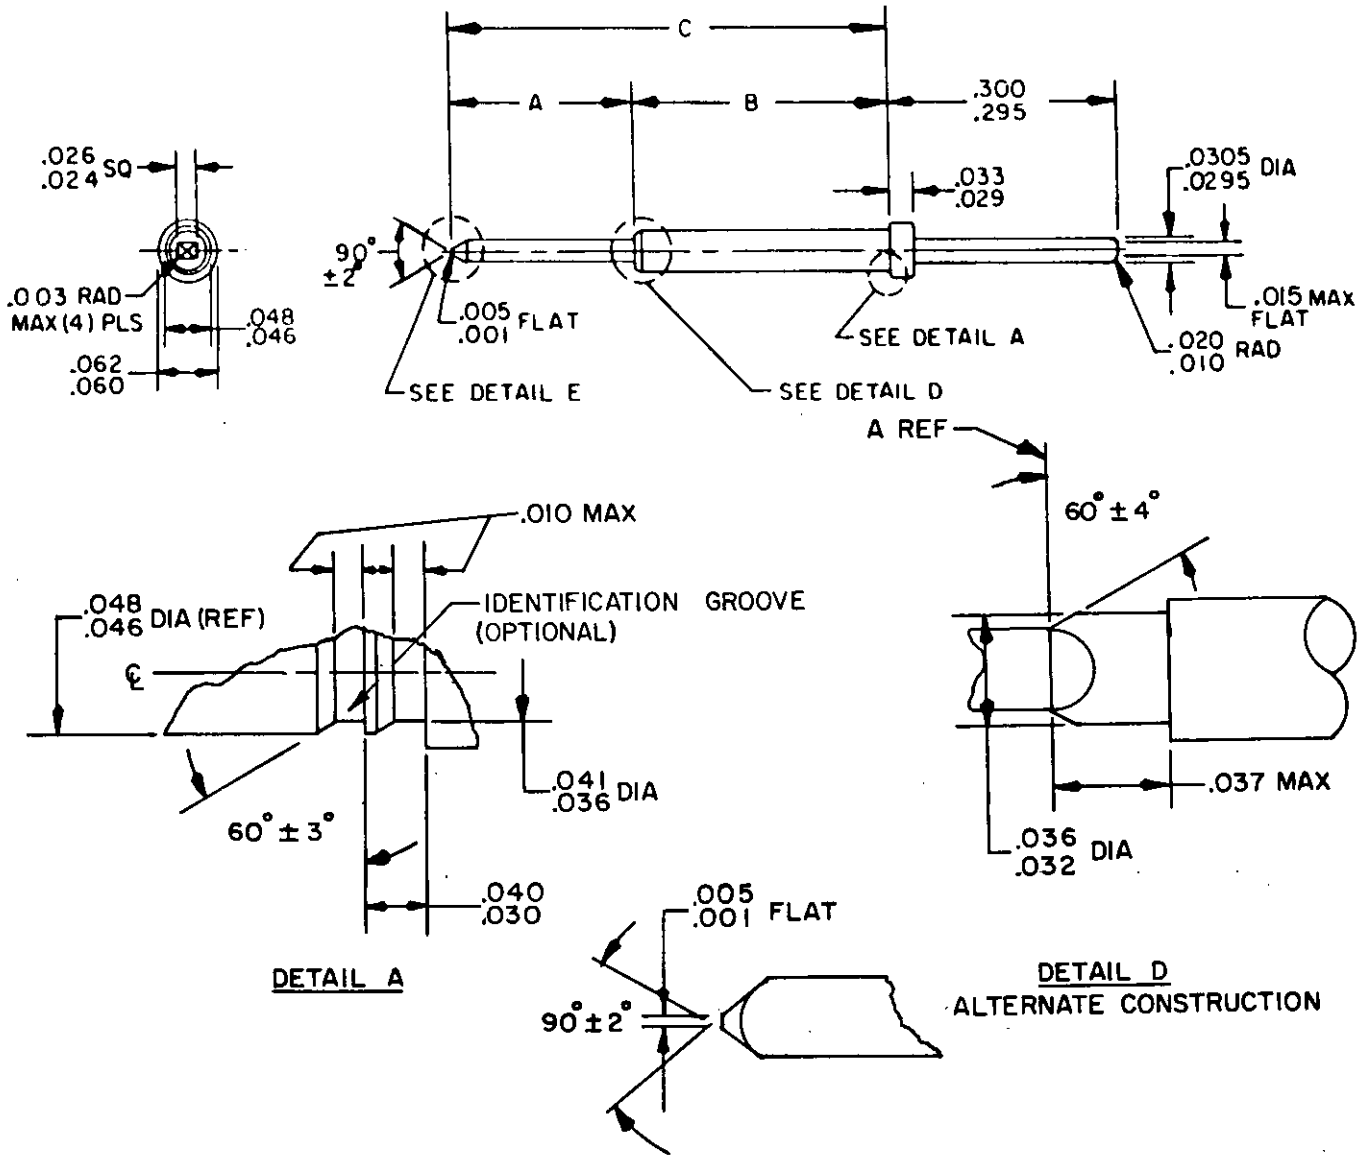

DETAIL A

DETAIL D
ALTERNATE CONSTRUCTION

DETAIL E
ALTERNATE CONSTRUCTION

FIGURE 1. Configuration and dimensions.

FSC 5935

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2025-10-21T18:45Z
Check the source to verify that this is the current version before use.

Dash No.	A	B	C
390	.205 .200	.344 .338	.538 REF.
391	.306 .302	.237 .231	.538 REF.
392	.355 .340	.340 REF.	.685 .675

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.032	0.81	.231	5.87
.003	0.08	.033	0.84	.237	6.02
.005	0.13	.036	0.91	.295	7.49
.010	0.25	.037	0.94	.300	7.62
.015	0.38	.040	1.02	.302	7.67
.020	0.51	.041	1.04	.306	7.77
.024	0.61	.046	1.17	.338	8.59
.026	0.66	.048	1.22	.340	8.64
.029	0.74	.060	1.52	.344	8.74
.0295	0.750	.062	1.57	.355	9.02
.030	0.76	.200	5.08	.538	13.67
.0305	0.770	.205	5.21	.685	17.40

NOTES:
1. Dimensions are in inches, apply after plating.
2. Metric equivalents are given for general information only.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

TABLE I. Design characteristics.

BIN code	Color bands			Mating end size	Type	Class
	1st	2nd	3rd			
390	Orange	White	Black	22	A	B
391	Orange	White	Brown			
392	Orange	White	Red			

Qualification:

Shall be in accordance with MIL-C-39029 and MIL-STD-1130 for class A wrap. Suppliers qualified to MIL-C-39029/58 (M39029/58-362) need only test in accordance with MIL-STD-1130 to qualify this contact.

Contacts shall comply with reliability assurance provisions of MIL-STD-790 as specified in MIL-C-38999.

Electrical:

Mating contact: The mating contact shall be as specified in MIL-C-39029/57.

Mechanical:

Vibration: Method 2005 of MIL-STD-1344, test condition VI, letter J, except the duration shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction (16 hours total).

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition D. The following exceptions shall apply:

a. The pulse shall be an approximate half sine wave of 300g ±15 percent magnitude with a duration of 3 milliseconds ±1.

b. The wire bundle shall be clamped to fixed points at 8 inches (203.2 mm) from the rear of the connector.

Wire wrapping: Wire wrapping shall be class A and wrapped in accordance with MIL-STD-1130.

CAUTION: Maintain light tension on the wire at the start of the wrap until one complete turn has been made.

Edge burrs: Wrappost edge burrs shall be .0015 inch (0.14 mm), maximum.

Tools (installation and removal): Tools for installation and removal shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

TABLE II. Tools.

Installing and removal tool
M81969/1-04 or M81969/8-01 and M81969/8-02

Usage data (see table III): These contacts are for use only on internal wiring of equipment and equipment panels. For MIL-C-38999, use is restricted to receptacles. When used in recommended connectors, these contacts assure the user of an adequate length for proper wrapping.

TABLE III. Usage data.

Connector type	Contact used M39029/71-
MIL-C-38999 MS27499E MS27508E MS27513 Series II	390, 391, 392
MS27496 Series I MS27505 Series I	390, 391, 392
M38999/42 Series IV	390, 391, 392
MIL-C-24308/4 MIL-C-24308/8 MIL-C-55302/69	390, 391, 392
MIL-C-83733/1	392

Military part number: The military part number shall be as specified in table IV.

TABLE IV. Part numbers.

BIN code	Part number	Supersedes
390	M39029/71-390	M39029/71-1
391	M39029/71-391	M39029/71-2
392	M39029/71-392	M39029/71-3

NOTE: QPL evaluating activity: Defense Electronic Supply Center (DESC-E), Dayton, OH 45444-5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 15, 99
DLA - ES

User activity:
Navy - OS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3508-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:40Z
Check the source to verify that this is the current version before use.