MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR SOCKET, REMOVABLE, SOLDERLESS WRAPPOST TERMINATION (FOR MIL-C-38999 SERIES I, II, III, AND IV, MIL-C-24308, AND MIL-C-55302/68, /71, AND /75 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest issue of MIL-C-39029.

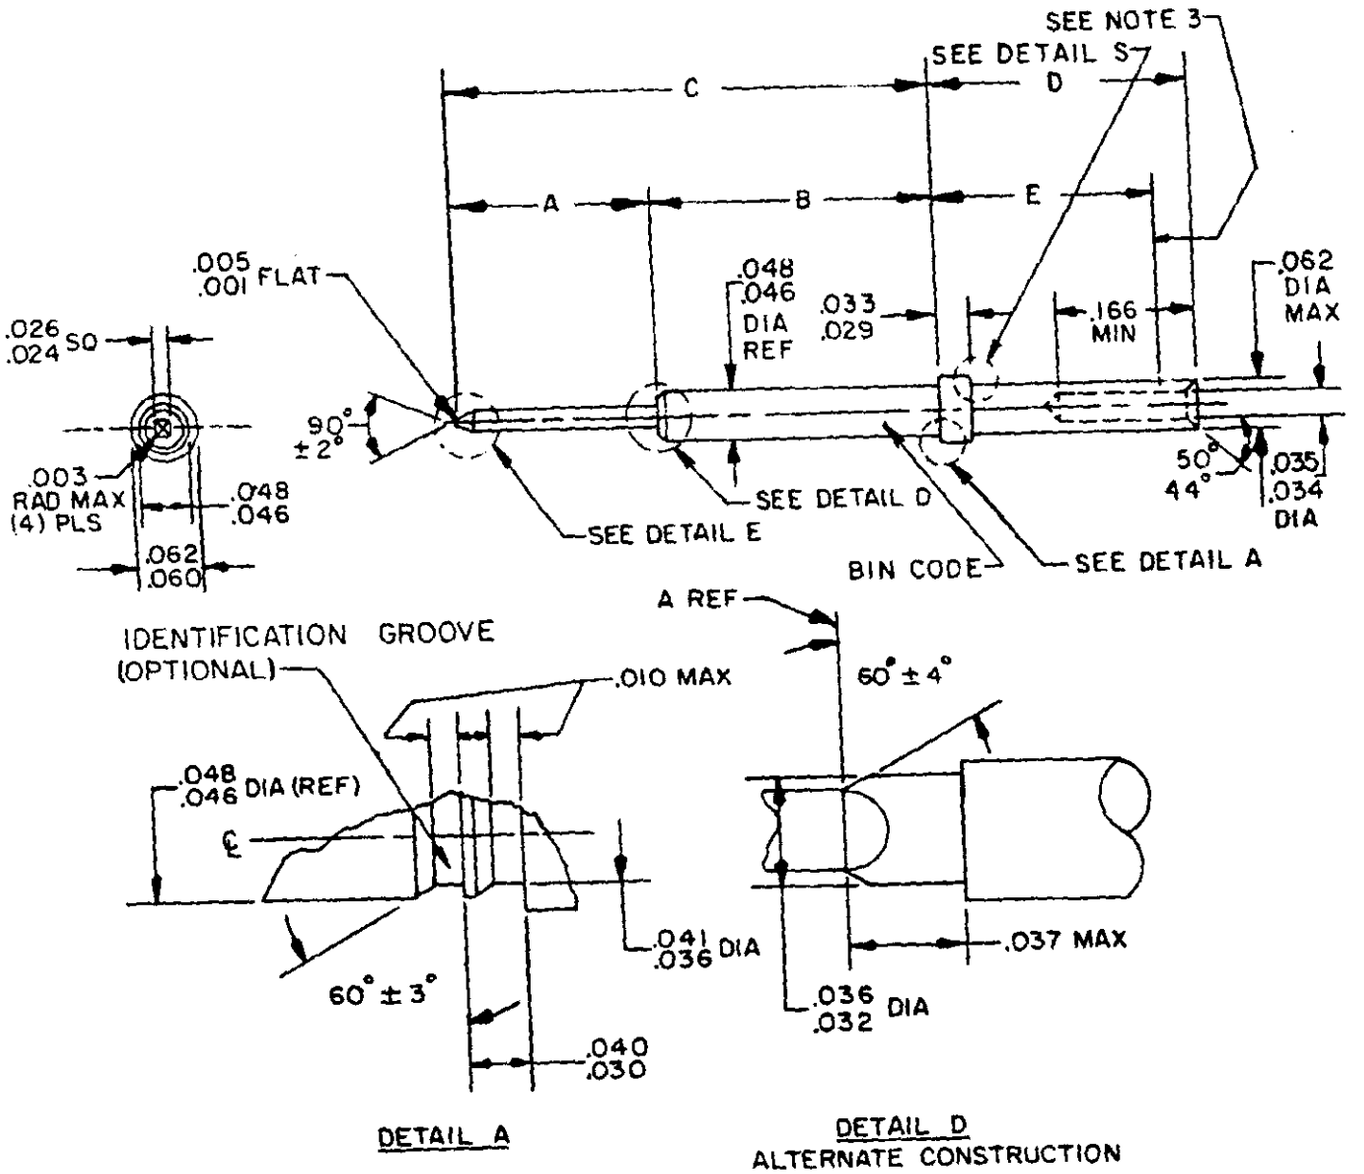



FIGURE 1. Configuration and dimensions.

FSC 593


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimite

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:41Z
Check the source to verify that this is the current version before use.

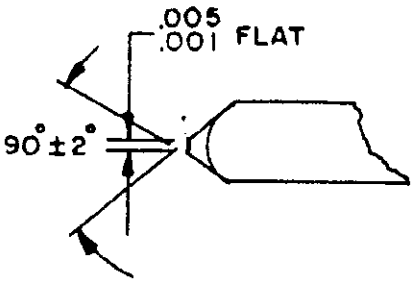

DETAIL E
ALTERNATE CONSTRUCTION

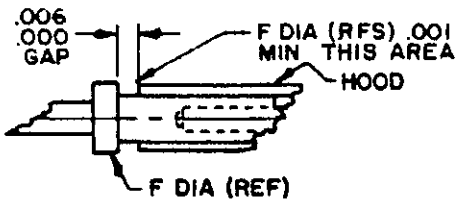

DETAIL S
(ALL SIZES)

Bin Code	A	B	C	D 1/	E 1/ (min)
393	.205 .200	.344 .338	.538 REF	.289 .279	.248
394	.306 .302	.237 .231	.538 REF	.289 .279	.248
395	.355 .340	.340 REF	.685 .675	.289 .279	.248
524	.247 .232	.278 REF	.532 .522	.626 .616	.585
525	.264 .249	.494 REF	.731 .721	.626 .616	.585
526	.355 .340	.340 REF	.685 .675	.626 .616	.585

1/ See table III for usage data.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.000	0.00	.036	0.91	.237	6.02	.355	9.02
.001	0.03	.037	0.94	.247	6.27	.494	12.55
.003	0.08	.040	1.02	.248	6.30	.522	13.26
.005	0.13	.041	1.04	.249	6.32	.532	13.51
.006	0.15	.046	1.17	.264	6.71	.538	13.67
.010	0.25	.048	1.22	.278	7.06	.585	14.86
.024	0.61	.060	1.52	.279	7.09	.616	15.65
.026	0.66	.062	1.57	.289	7.34	.626	15.90
.029	0.74	.166	4.22	.302	7.67	.675	17.14
.030	0.76	.200	5.08	.306	7.77	.685	17.40
.032	0.81	.205	5.21	.338	8.59	.721	18.31
.033	0.84	.231	5.87	.340	8.64	.731	18.57
.034	0.86	.232	5.89	.344	8.74		
.035	0.89						

NOTES:
1. Dimensions are in inches, apply after plating.
2. Metric equivalents are given for general information only.
3. Point at which a square ended pin of the same basic diameter as the mating contact first engages the socket contact spring.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

TABLE I. Design characteristics.

BIN code 1/	Color bands			Mating end size	Type	Class
	1st	2nd	3rd			
393	Orange	White	Orange	22	A	A
394	Orange	White	Yellow	"	"	"
395	Orange	White	Green	"	"	"
524	Green	Red	Yellow	"	"	"
525	Green	Red	Green	"	"	"
526	Green	Red	Blue	"	"	"

1/ Fits cavity size 220.

Qualification:

Shall be in accordance with MIL-C-39029 and MIL-STD-1130 for class A wrap. Suppliers qualified to MIL-C-39029/57 (M39029/57-354) or MIL-C-39029/56 (M39029/56-348) need only test in accordance with MIL-STD-1130 to qualify this contact.

Contacts shall comply with reliability assurance provisions of MIL-STD-790 as specified in MIL-C-38999.

Electrical:

Mating contact: The mating contact shall be as specified in MIL-C-39029/58.

Mechanical:

Vibration: Method 2005 of MIL-STD-1344, test condition VI, letter J, except the duration shall be 8 hours in the longitudinal direction and 8 hours in the perpendicular direction (16 hours total).

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition D. The following exceptions shall apply:

a. The pulse shall be an approximate half sine wave of 300 g ±15 percent magnitude with a duration of 3 milliseconds ±1.

b. The wire bundle shall be clamped to fixed points at 8 inches (203.2 mm) from the rear of the connector.

Wire wrapping: Wire wrapping shall be class A and wrapped in accordance with MIL-STD-1130.

CAUTION: Maintain light tension on the wire at the start of the wrap until one complete turn has been made.

Edge burrs: Wrappost edge burrs shall be .0015 inch (0.14 mm), maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:41Z
Check the source to verify that this is the current version before use.

Tools (installation and removal): Tools for installation and removal shall be as specified in table II.

TABLE II. Tools.

Installing and removal tool
M81969/1-04 or M81969/8-01 and M81969/8-02

Usage data (see table III): These contacts are for use only on internal wiring of equipment and equipment panels. For MIL-C-38999, use is restricted to receptacles. When used in recommended connectors, these contacts assure the user of an adequate length for proper wrapping.

TABLE III. Usage data.

Connector type	Contact used M39029/72-
MS27513	
MS27499E, MIL-C-38999, Series II	393, 394, 395
MS27508E, MIL-C-38999, Series II	" " "
MIL-C-24308/2	" " "
MIL-C-24308/6	" " "
MIL-C-55302/68	" " "
MIL-C-55302/71	" " "
MIL-C-55302/75	" " "
MIL-C-38999, Series I,III, and IV	524, 525, 526
MIL-C-38999/42	" " "
MS27495, MS27505	" " "

Military part number: The military part number shall be as specified in table IV.

TABLE IV. Military part numbers and BIN code.

BIN code	Military part number	Supersedes part number
393	M39029/72-393	M39029/72-1
394	M39029/72-394	M39029/72-2
395	M39029/72-395	M39029/72-3
524	M39029/72-524	---
525	M39029/72-525	---
526	M39029/72-526	---

NOTE: QPL evaluating activity: Defense electronic Supply Center (DESC-E) Dayton, OH 45444-5000.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:41Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, SH
Air Force - 11, 15, 99
DLA - ES

User activity:
Navy - OS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3508-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:41Z
Check the source to verify that this is the current version before use.