MIL-P-36816A
6 July 1976
SUPERSEDING
MIL-P-36816
15 February 1972

MILITARY SPECIFICATION

PAD, LITTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a lightweight, watertight, flame resistant, durable, self-inflatable litter pad.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-375	- Plastic Film, Flexible, Vinyl Chloride.
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-B-5924	- Batting, Insulation, Glass Fibers.
MIL-L-10547	- Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

FEDERAL

Fed Test Method Std No. 191 - Textile Test Methods,

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM Special Technical Publication (STP) 422
Method for Measuring Smoke from Burning Materials

ASTM E-84 Surface Burning Characteristics of Building Materials.

ASTM E-162 Surface Flammability of Materials Using a Radiant Heat Energy Source, Test for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card No. 70072

(Application for copies should be addressed to Color Association of the United States, Inc. 200 Madison Avenue, New York, NY 10016.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

UNDERWRITERS' LABORATORIES, INC. (U.L.)

U.L. 723	Building Materials Test for Surface Burning Characteristics

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 207 East Ohio Street, Chicago, IL 60611, 333 Pfingsten Rd., Northbrook, IL 60062, 1285 Walt Whitman Rd., Melville, LI, NY 11746, 1655 Scott Blvd., Santa Clara, CA 95050.)

U. S. DEPARTMENT OF COMMERCE

NATIONAL BUREAU OF STANDARDS (NBS)

NBS-SRM 1006	Nonflaming Test Reference Material.
NBS-SRM-1007	Flaming Test Reference Material.
NBS-SRM TECHNICAL NOTE 708 Dec 1971	Inter-Laboratory Evaluation of Smoke, Density Chamber.

(Copies and prices of NBS Reference Materials and Certificates may be obtained upon application to the Superintendent of Documents, Government Printing Office, Washington, DC 20225.)

3. REQUIREMENTS

* 3.1 First article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.3).

* 3.2 Fire and casualty hazards. The contractor shall submit proof, prior to delivery, that the fiberglass batting material supplied in accordance with this specification is non-combustible. Two standards acceptable for testing the material for conformance to this requirement are as follows: U.L. 723 and ASTM E-84. Proof shall consist of one of the following:

A. U.L. Label affixed to the product,.provided the contractor agrees to have Underwriters' Laboratories, Inc. forward a copy of the U.L. report directly to the Contracting Officer, upon the latter's request.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

B. Laboratory report from a nationally recognized indepedent laboratory. If an independent laboratory is used, it must be adequately equipped and competent to determine compliance with the above requirement. The Government reserves the right to require a facilities report and to conduct a facilities survey. Any laboratory report submitted shall include actual test methods, data taken, and results of tests. Detailed findings of examinations necessary to determine compliance shall also be included. The test report shall also have a section that describes the test sample in such a way that the report can be used to insure identity of production items with the test sample. This section shall be supplemented with construction information such as materials used, photographs and sketches, all appropriately identified. Compliance with this paragraph does not excuse compliance with all other requirements of the contract and specifications.

3.3 Material.

* 3.3.1 Glass fiber. Both types of glass fiber used in the pad as specified in 3.3.1.1 and 3.3.1.2 shall be nonflammable.

3.3.1.1 Comfort layer. Glass fiber batt used for the comfort layers in the pad shall be in compliance with type IIA of MIL-B-5924 except the pad shall be 1/2 ± 1/16 inches thick having a density of .60 + 5%,-10% pounds per cubic foot (lbs./cu.ft.) (see 6.5). Physical properties of the glass fiber batt shall be in accordance with MIL-B-5924 when tested as specified in 4.4.1. Shall have uniform density and resiliency. Shall also be free from clusters or spears of undrawn glass or undistributed binder which penetrate the pad cover.

3.3.1.2 Cushion layer. Glass fiber batt used for the cushion layer in the pad shall be textile fiber blanket having a fiber diameter of approximately 9 microns. Shall be 2 ± 1/8 inches thick having a density of 2.0 + 5%,-10% lbs./cu. ft., (see 6.5). Binder content of the fiber glass batt shall not exceed 19 percent as specified in 4.4.2.2. Compression resistance shall be 140 + 40,-20 lbs./square ft. when tested as specified in 4.4.2.1. The non-combustible feature of the material is covered in 3.2. Shall also be free from clusters or spears of underdrawn glass or undistributed binder which penetrate the pad cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

* 3.3.2 Polyvinylchloride (PVC) film. PVC film used for the cover of the pad shall be in conformance with type II, Class 2 of L-P-375 except as follows:

a. extraction in soapy water shall be 4.5% maximum.

b. There shall be no evidence of failure when tested for cold crack at -30°F.

c. The minimum ultimate elongations shall be 155% in the machine direction and 210% in the transverse direction.

d. 17.4 maximum shall apply for Clark Stiffness at -20°F.

The film shall be 0.007 inch thick, minimum, with fire retardant plasticizer formulation which shall be free of skin irritants. The exterior surface of the film shall be watertight, airtight, pliable, non-absorbent, embossed (see 6.8) and slip inhibiting.

* 3.3.2.1 Air tightness. The cover material shall be tested for an air tightness as described in 4.4.6. Any evidence of air inflation shall be cause for rejection.

* 3.4 Construction. The litter pad shall consist of a PVC cover, an automatic reverse flow check valve, and a glass fiber interior. Construction shall be in accordance with figure 1. In the use mode, the pad shall measure 72 by 23 by 2 inches. After pressing out the excess air by hand, the pad shall be capable of being folded to a storage mode size of 24 by 23 by 3-1/2 ± 1/2 inches. The pad shall weigh 5 pounds ± 1/2 pound.

* 3.4.1 Cover. The pad cover shall be PVC film in accordance with 3.3.2. There shall be no punctures, pin holes, nor tears in the cover. The cover shall be capable of being cleaned by washing with soap and water. The cover color shall be Indian Orange No. 70072-Air-Sea Rescue as shown in the Standard Color Card issued by the Color Association of the United States, Inc.

* 3.4.2 Valve. An automatic reverse flow check valve shall be heat sealed to the litter pad and located as shown in figure 1. The valve shall have the following design capabilities:

a. Breathing and sealing provisions to provide an orifice for self-inflation.

b. Automatic accommodation to ambient pressures and temperature changes.

c. Insure buoyancy during water emergencies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

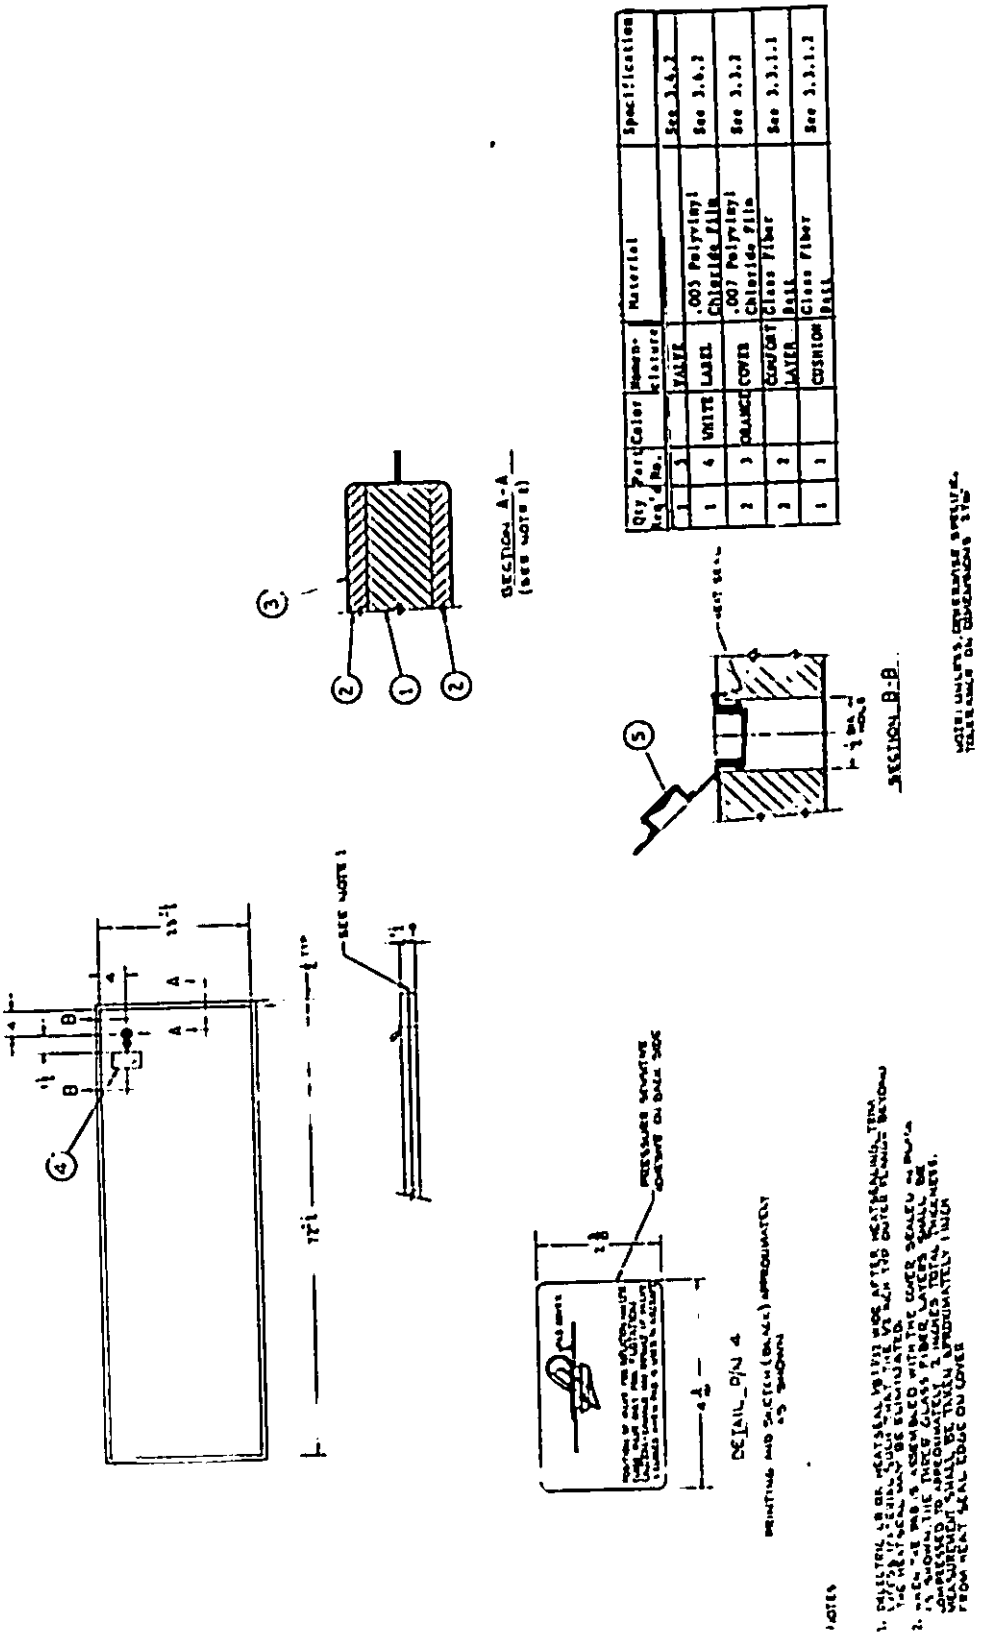


FIGURE 1. Pad, Liner

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

The valve shall permit the pad to be deflated to one-third the inflated volume, for ease of shipment and storage. Color of the valve shall be a contrasting color with that of the litter pad. The valve shall not project more than 5/16 inches above the pad surface when closed.

* 3.4.2.1 Bond strength. The strength of the heat-sealed bond between the valve and pad cover shall be at least equal to that specified in L-P-375 for bondability of two layers of PVC film. The bonding strength test of L-P-375, as applicable, shall be used in testing bondability between valve and cover, however, table IV shall be utilized for inspection level.

3.4.3 Interior. A two-inch thick cushion layer in conformance with 3.3.1.2 shall be sandwiched between two 1/2 inch thick comfort layers complying with 3.3.1.1. The three layers of glass fiber shall compress to a total thickness of 2 inches + 1/2, -0 inch when they have been sealed inside the cover of the finished pad.

3.5 Performance. The complete pad shall be tested for flammability and smoke generation as specified herein.

3.5.1 Flammability. When tested in accordance with 4.4.4, the tests and test result shown in table I shall apply. Vertical burn lengths shall be for the average of machine and cross directions.

TABLE I. Testing for flammability.

Flammability Test	Test Result
Horizontal Rate of Burning	Pad and separate materials making up the pad: Zero-burn rate.
Vertical Burn	Pad burn length: 3.5 inches, maximum. Cover burn length: 6.8 inches, maximum.
Radiant Panel Flame-Spread	Average burn length of pad: 13 inches, maximum, at 15° Centigrade.

3.5.2 Smoke generation. The smoke measurements in table II shall apply when tested as specified in 4.4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

TABLE II. Smoke generation test.

	Time to Reach Ds16 (minutes) Minimum	Dm Corrected Maximum
PVC Cover Material Only:		
1/ Either Flaming or Smoldering (non-flaming)	0.135	140
Complete Litter Pad:		
1/ Either Flaming or Smoldering (non-flaming)	0.125	175

1/ Minimum of 3 readings each.
From ASTM Special Technical Publication (STP) 422.

Ds16 = Specific optical density equivalent to a 25% reduction of light level.
Dm = Maximum specific optical density.

Glass fiber will not burn. The binder used in the cushioning material will burn, but when used in conjunction with the glass fiber, the time required to reduce the light level by 25 percent (Ds) is not applicable since smoke generation is not sufficient to give the reduction in light level. Therefore, it is not necessary to take smoke measurements for cushioning material.

* 3.6 Marking. Each pad cover shall be permanently and legibly marked with identification, valve instruction label, and instructions for repair of the cover and operation of the valve. Further, when the pad is cleaned with soap and salt water, the markings shall not show change.

* 3.6.1 Identification. Each pad cover shall be marked in black with the following:

Name of the manufacturer
Contract or purchase order number
National Stock Number
Date of fabrication
Lot number

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

* 3.6.2 Label. A PVC pressure-sensitive label as described in figure 1 shall be applied in the location indicated.

* 3.6.3 Instruction. Instructions for repair of the cover and for operation of the valve shall be imprinted in black on the pad cover as follows:

OPERATION INSTRUCTIONS

1. For use in aircraft: Remove and leave valve out of socket.

2. For use in water: Remove valve to inflate, then replace valve in socket.

3. To deflate for storage: With valve out of socket, roll pad from opposite end. When air is expelled, replace valve in socket. Fold or roll for storage.

4. To repair punctures in cover: Patch with vinyl adhesive or vinyl tape. For emergency repair, the PVC label next to the valve may be peeled back and placed over puncture or tear.

5. Recommend cover be cleaned with soap and water only.

3.7 Workmanship. Workmanship shall be first class throughout. Litter pads shall be free from defects which detract from their appearance or which may impair their serviceability.

* 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the pad when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and tests of 4.4.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and tests of 4.4.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturers of the glass fiber and PVC film, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component or material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table III. Unit of product for sampling purposes shall be one litter pad.

TABLE III. Sampling for examination.

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	I	1.0
Minor defects	I	2.5
For dimensional examination	S-3	2.5

4.2.2 For tests. Sampling for tests shall be conducted on each lot of material in accordance with MIL-STD-105 and table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

TABLE IV. Sampling for tests.

Component (unit of product)	Characteristic	Requirement	Test procedure	Sample unit	Inspection level	AQL
Comfort layer-glass fiber	Physical properties	3.3.1.1	4.4.1	3 sq. yd.	per lot of fiber	per test requiremen
Cushion layer-glass fiber	Physical properties	3.3.1.2	4.4.2.1 4.4.2.2	as req'd by test	per lot of fiber	1/
PVC cover film	Physical properties	3.3.2	4.4.3	3 sq. yd.	per lot of film	per test requiremen
	Flammability	3.5.1	4.4.4	as req'd by test	per lot of film	1/
	Smoke generation	3.5.2	4.4.5	as req'd by test	per lot of film	1/
	Air tightness	3.3.2.1	4.4.6	1 complete pad	S-1	1/
Complete pad	Flammability	3.5.1	4.4.4	as req'd by test	2 pads per contract	1/
	Smoke generation	3.5.2	4.4.5	as req'd by test	2 pads per contract	1/
Valve	Bondability	3.4.2	L-P-375 (Bonding strength)	1 complete pad	2 pads per contract	1/
Pad	Weight	3.4	4.4.7	1 complete pad	S-1	1/

1/ Acceptance number is zero.

4.3 Examination. The litter pad shall be examined to determine compliance with the specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects in table V. Examination shall not be restricted to the classified possible defects listed below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects.

Categories	Defects
Major	
101	PVC film not free of cuts, cracks and tears.
102	Edge or end seams not completely heat sealed.
103	PVC film not free of patches, pin holes, and imbedded foreign matter and thin areas.
104	Cover not specified color.
105	Heat seal temperature excessive, weakening the seal area.
106	PVC cover penetrated by interior fiber glass material.
Minor	
201	Heat seals not free of wrinkles and bunching.
202	Marking missing, incomplete or illegible.
203	PVC film not free of dirt, grease and loose foreign matter.

4.3.2 Dimensional examination. The litter pads shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted on each lot of material used in the fabrication of each component of the pad, as well as the complete pad, to determine compliance with specification requirements.

4.4.1 Comfort layer. Tests on the glass fiber batt shall be conducted in accordance with the procedures outlined in MIL-B-5924.

4.4.2.1 Compression resistance. The fiberglass cushioning material shall be tested for compression loading by using an Instron force deflection machine or other suitable instrument. The load observed to compress the nominal 2 inch thick material to a thickness of 1/2 inch shall be recorded in pounds per square foot.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

4.4.2.2 Binder content. The binder content of each sample tested shall be determined by heating small pieces separated from not less than 1/2 square foot of the sample material to approximately 1000°F. for 1 hour in an oven adequately vented in such a manner as to insure complete circulation of the atmosphere of the entire oven chamber, preferably by fan or other forced circulation methods. The weight before and after heating shall be taken under atmospheric conditions of the same relative humidity. The binder content shall be calculated as follows:

$$\text{Percent binder content} = \frac{(W_1 - W_2)}{W_1} \times 100$$

where

W_1 = Original weight of sample
W_2 = Final weight of sample

* 4.4.3 PVC film. Testing for the physical properties of the PVC film shall be in accordance with the applicable testing procedure detailed in L-P-375.

4.4.4 Flammability. The flammability tests described in 3.5.1 shall be performed in accordance with the applicable test method listed in table VI.

TABLE VI. Flammability tests.

Flammability Test	Test Method
Horizontal Rate of Burning	5906 Fed Test Method Std. No. 191
Vertical Burn	5903 of Fed Test Method Std. No. 191
Radiant Panel Flame-Spread	ASTM E-162

* 4.4.5 Smoke generation. The smoke measurement tests described in 3.5.2 shall be performed using the NBS Smoke Density Chamber as described in ASTM-STP 422 updated by NBS Technical Note 708 (see 6.7). The smoke density chamber shall be calibrated in accordance with the procedure outlined in NBS Technical Note 708 using their standard reference materials NBS SRM 1006 for non-flaming tests and NBS SRM 1007 for the flaming tests.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:23Z
Check the source to verify that this is the currentversion before use.

* 4.4.6 Air tightness. The pad shall be evacuated of air by hand rolling and the valve cover secured in place in the valve hole opening such that air cannot enter or leave thru the valve opening. The pad shall then be laid flat on a level surface for 72 hours. At the end of the 72 hour period the pad shall be examined for inflation. An inflated pad is considered to be a test failure.

* 4.4.7 Weight. The finished pad shall be placed on a suitable weighing scale. The weight of the pad shall be recorded.

* 4.5. Examination for preparation for delivery. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of section 5. Defects shall be scored as specified in table VII. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0 defects per hundred units.

TABLE VII. Examination for preparation for delivery.

Examination	Defect
Containers	Not as specified.
Quantity	Quantity in interior packages and shipping containers not as specified.
Packaging and packing materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, tape improperly applied, or containers distorted.
Markings	Omitted, incorrect, illegible, improper size, location, sequence, or method of application.

* 5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil - Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

5.1.1 Level A.

5.1.1.1 Unit package. Each pad shall be neatly folded to a minimum size, in such a manner as not to distort or damage the pad. Pad shall be further packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Closure of box shall be adequate to prevent accidental opening. Metal fasteners shall not be used in the assembly or closure of the box.

5.1.2 Level C. Pads shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Ten (10) pads shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2 or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof as specified in the appendix of PPP-B-636.

5.2.2 Level B. Ten (10) pads shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, type CF, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. Pads shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Unit package and exterior container. Each unit package and exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The litter pad shall be suitable for use on folding litters NSN 6530-00-783-7205 and NSN 6530-00-783-7905, in aeromedical evacuation of patients. The litter pad shall be suitable for storage aboard aircraft.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6530-00-137-3016	PAD, LITTER, 72 by 23 by 2 inches

6.5 Glass fiber, suitable for use as the comfort layer, is available from Johns-Manville Aerospace Products as their "MICRO-LITE B". Glass fiber, suitable for use as the cushion layer, is available as "ULTRALITE" glass fiber from Certin-Teed Products Corporation.

6.6 The Roberts 1010-AF Valve, Thermal Resistant, shall be an acceptable valve for the type specified in 3.4.2, and is available from Halky-Roberts Corporation, Paramus, NJ.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the currentversion before use.

6.7 The NBS Smoke Density Chamber described in 4.4.5 is available from American Instrument Company, Silver Spring, MD, who also perform smoke measurement tests.

6.8 General Tire and Rubber Co. No. 260 Sand Stipple, or equal, is considered acceptable for the embossing requirements of 3.3.2.

6.9 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6530-1370

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-P-36816A PAD, LITTER

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

☆ GPO: 1974— 603-680/6126 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.