MIL-T-36813A(DSA-DM)
18 March 1976
SUPERSEDING
MIL-T-36813
26 January 1972

MILITARY SPECIFICATION

TROCAR, COAKLEY, ANTRUM

This specification is approved for use by the Defense Personnel Support Center, Defense Supply Agency and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a curved antrum trocar of the Coakley design.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

GG-I-526	- Instruments, Dental and Surgical; General Specifications.
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Box, Fiberboard.
PPP-B-676	- Box, Set-Up.

Military

MIL-P-116	- Preservations, Methods of.
MIL-L-10547	- Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

of the type. Access to the bag shall be by affixed to the distal end

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

* 3.1 General requirements. The curved antrum trocar shall be in accordance with the applicable requirements of GG-I-526, and the following specific requirements:

3.2 Material. The trocar shaft and cannula shall be fabricated from Class 3, Type 303 or 304 material. The irrigating attachment and remainder of instrument shall be fabricated from Class 3, Type 304 or Class 8, alloy number 260, 270 or 360 material.

3.3 Hardness. After proper stress relieving, the Rockwell hardness of the Class 3 material shall be B 75 to B 85.


* 3.4 Style, design, and dimensions. Shall be a curved antrum trocar of the Coakley design, with a sheath and irrigating attachment. Shall be in accordance with Figure 1.

* 3.4.1 Fluid tightness. Sheath shall make a fluid tight connection with irrigating attachment when tested as specified in 4.4.1.

* 3.5 Finish. Shall be mirror, or mirror and satin.

3.6 Identification marking. In addition to GG-I-526 requirements, trocars of foreign manufacture shall also be marked "stainless".

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

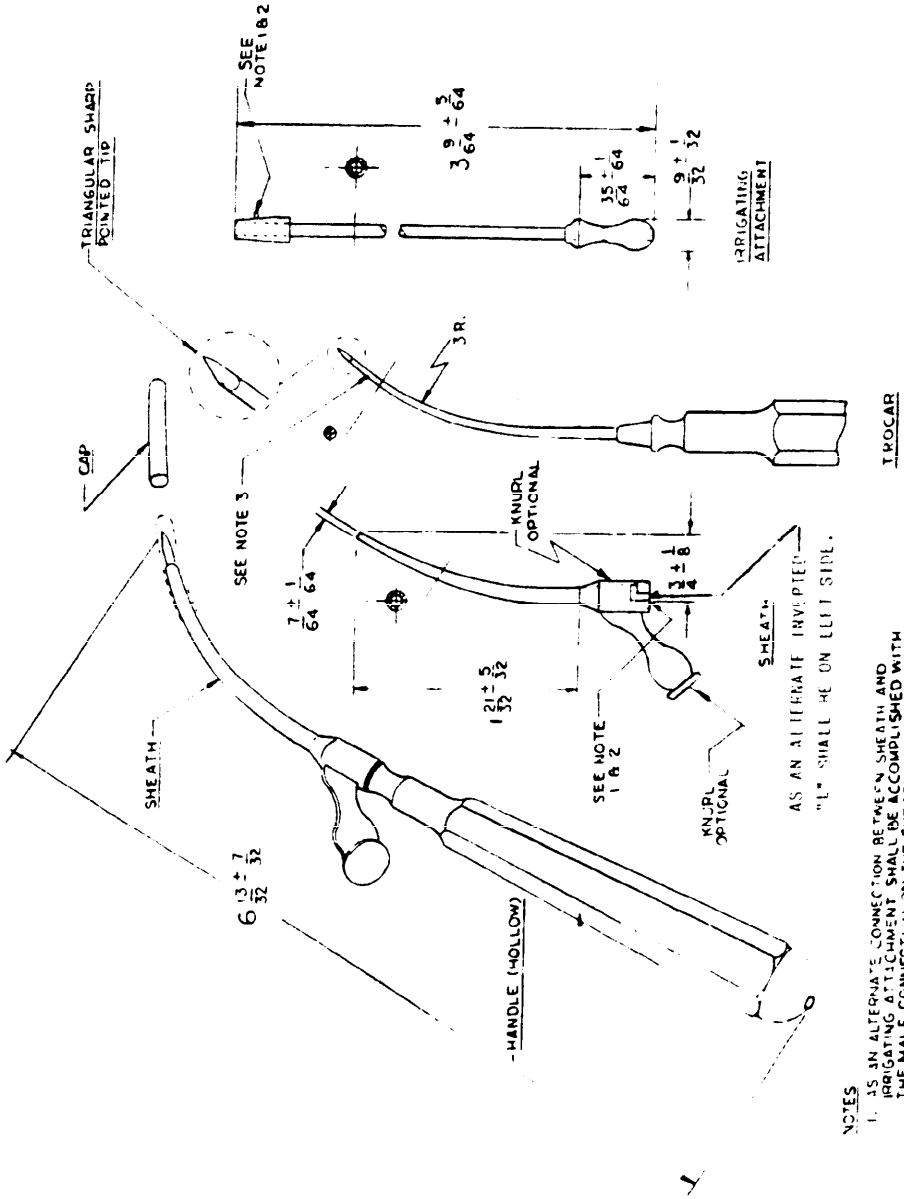

NOTES

1. AS AN ALTERNATE CONNECTION BETWEEN SHEATH AND IRRIGATING ATTACHMENT SHALL BE ACCOMPLISHED WITH THE MALE CONNECTION ON THE SHEATH AND THE FEMALE CONNECTION ON THE IRRIGATING ATTACHMENT.
2. SHEATH SHALL MAKE FLUID TIGHT CONNECTION WITH IRRIGATING ATTACHMENT.
3. TROCAR SHALL BE CAPABLE OF BEING FULLY INSERTED INTO SHEATH, AND SHALL BE OF SUCH LENGTH THAT, WHEN FULLY INSERTED, TROCAR POINT SHALL EXTEND BEYOND SHEATH TIP FROM 0 TO 1/4 INCH. TAPERING OF TROCAR (WITH SMALLER DIAMETER AT POINTED END) SHALL BE PERMITTED.
4. ALL JOINTS SHALL BE SILVER OR LEAD SOLDERED.
5. TOLERANCE INDICATED DELINEATE ACCEPTABLE EXTREMES OF DIMENSIONS, AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP.

FIGURE 1. Trocar, Coakley, antrum

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the corrosion resisting steel and brass, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in table I. The unit of product for examination purposes shall be one trocar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Sampling for examination

Type of defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor	II	2.5

* 4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in table II. The unit of product for test purposes shall be one trocar.

TABLE II. Sampling for tests

Component (unit of product)	Characteristic	Reqmt.	Test procedure	Insp. level	AQL (percent defective)
1-Trocar	Composition analysis	3.2 & GG-I-526	GG-I-526	1/	2/
	Hardness	3.3 & GG-I-526	GG-I-526	S-2	1.5
	Dimensions	3.4	---	S-2	4.0
	Boil test	GG-I-526	GG-I-526	S-2	1.5
	Salt spray 3/	GG-I-526	GG-I-526	S-2	1.5
	Thickness coating 3/	GG-I-526	GG-I-526	S-2	1.5

1/ Sufficient amount from each lot of each metal used in the construction of the trocar shall be selected for composition analysis.
2/ Acceptance number shall be zero for all sample sizes.
3/ Shall apply for brass material only.

* 4.3 Examination.

4.3.1 Examination of trocar. The trocar shall be examined to determine compliance with specification requirements. Examination shall be conducted in accordance with MIL-STD-105 and the classification of defects specified in table III. Examination, however, shall not be restricted to the classified possible defects listed in table III.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects

Categories	Defects
Critical	None defined.
Major	
101	Trocar not complete.
102	Style and design not as specified.
103	Trocar not free of sharp edges, rough areas, burrs, cracks, grind marks, and overlaps.
104	Trocar not being able to assemble to sheath.
105	Tip not sharp.
Minor	
201	Identification marking not present, correct, complete and legible.
202	Finish not as specified.

4.3.2 Examination of preparation for delivery. An examination shall be made to determine whether the packaging, packing and marking comply with the requirements of Section 5. Defects shall be scored as specified in table IV. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Containers	Not as specified.
Contents	Not as specified.
Markings	Omitted; incorrect; illegible; improper location, sequence, or method of application.
Packaging & packing materials	Any component missing or damaged.
Workmanship	Bulging or distortion of containers. Cushioning inadequate, improper or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

* 4.3.2.1 Examination of closure and reinforcement for containers. When shipping containers are required to comply with PPP-B-636, examination for defects in closure and reinforcement shall be in accordance with the appendix to that specification.

* 4.4 Tests.

4.4.1 Fluid tightness test. The trocar shall be subjected to an internal water pressure of 25 pounds per square inch (psig) for ten minutes and the leakage at connection of sheath and irrigating attachment, and each joint of the trocar shall not exceed the formation of one clinging drop.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning, drying and preservative. Each trocar shall be thoroughly cleaned, and dried in accordance with the applicable method as outlined in MIL-P-116. Preservative shall not be applied.

5.1.1.2 Unit package. Each trocar shall be wrapped in neutral tissue or other suitable anticorrosive material. Each trocar shall be further packaged in accordance with MIL-P-116, method IA-15 or method IC-2.

5.1.1.3 Intermediate package. Six (6) trocars shall be packaged in a box of appropriate size constructed in accordance with PPP-B-676 except that commercial colors are acceptable or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent spilling of contents under normal handling.

5.1.2 Level C. Trocars shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 20260-21T09:23Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. One hundred forty-four (144) trocars shall be packed in a box designed for a type 2 load, and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2 or PPP-B-636, type CF, class weather-resistant. Closure and strapping shall be in accordance with the appendix of the applicable box specification.

5.2.1.1 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard boxes shall be waterproofed in accordance with PPP-B-636.

5.2.2 Level B. One hundred forty four (144) trocars shall be packed in a box designed for a type 2 load, and constructed in accordance with PPP-B-585, class 2, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, type CF, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking. Each unit, intermediate package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. The antrum trocar is used for puncturing antrum to promote drainage and washing out the cavity.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(c) The national stock number.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the currentversion before use.

6.3 National Stock Number (NSN) coverage. The item is intended to cover the following item appearing in the Federal Supply Catalog:

National Stock No.	Item Identification
6515-00-383-7100	TROCAR, Coakley, Antrum

It does not include all types or styles as indicated by the title nor all types which are commercially available.

6.4 Note. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and the relationship to the previous issue.

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1981

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the currentversion before use.

a standard make

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-36813A (DSA-DM) TROCAR, COAKLEY, ANTRUM

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:23Z
Check the source to verify that this is the current version before use.

c) National stock number

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:23Z
Check the source to verify that this is the current version before use.