MIL-H-44302
27 October 1987

MILITARY SPECIFICATION

HOOD, BALACLAVA, EXTENDED COLD WEATHER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type and size of hood.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bags, plastic
DDD-L-20	-	Label; for Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-3735	-	Cuffs, Knit, Wrist and Ankle, and Cloth, Knitted
MIL-T-5038	-	Tape, Textile and Webbing, Textile, Reinforcing Nylon
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage: General Specification For
MIL-C-43303	-	Cord, Elastic Cotton
MIL-T-43548	-	Thread Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-44161	-	Cloth, Knitted, Terry, Synthetic Fibers

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Materials. (see 6.5).

3.3.1 Basic material. The outer shell of the hood (cover fabric) shall be knit, wool, Camouflage Green 483 conforming to type I, class 4 of MIL-C-3735.

3.3.2 Lining material. The fabric for the lining (layer next to head) shall be polyester, sheared fleece, Camouflage Green 483 conforming to type II of MIL-C-44161.

3.3.3 Elastic cord. The elastic cord for the face opening shall conform to class 2 of MIL-C-43303. The color shall be natural.

3.3.4 Tape, nylon. The nylon tape for the pull tab shall be 1-inch wide conforming to MIL-T-5038. The color shall be Camouflage Green 483.

3.3.5 Thread. The thread for seaming and stitching the hood shall be Green E C.A. 66034, polyester-, rayon- or cotton-covered ticket Nos. 40, 2 or 3 ply, or 50, 2 or 3 ply, conforming to MIL-T-43548.

3.3.6 Label. The label shall conform to type VI, class 14 of DDD-L-20. Fastness to laundering requirements of DDD-L-20 shall apply. The label shall contain the following information in capital letters:

HOOD, (BALACLAVA), EXTENDED COLD WEATHER
MACHINE WASH IN COLD WATER ON GENTLE CYCLE WITH MILD DETERGENT
TUMBLE DRY AT LOW HEAT SETTING

The contractor shall insert the Date of Manufacture with indelible ink.

3.4 Design. The hood shall be the pull-over-the-head type, and shall have a facial opening adjustable by means of a pull tab.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns, which provide 3/8 inch seam allowance, will be furnished by the Government and shall be used by the contractor as a guide for cutting working patterns only. The standard patterns shall not be altered in any way and the working patterns sahll be cut to conform exactly to the standard patterns.

3.5.1 Pattern parts. The components of the hood shall be cut from the materials specified in table I in accordance with pattern parts indicated.

TABLE I. List of pattern parts

Material	Nomenclature	Parts
Basic material (3.3.1)	Side cover	2
	Center top cover	1
	Center neck cover	1
Lining material (3.3.2)	Side lining	2
	Center top lining	1
	Center neck lining	1

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the document shall govern.

3.6.1 Stitches, seams and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. Thread tension shall be maintained so that no tight or loose tension will result. Overedge stitching shall be 3/16 to 1/4 inch wide.

3.6.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3.6.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.6.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Both ends of all seams or stitching produced with 401 stitch type, when not turned under in a hem or held down by other stitching, shall have a 1/2 to 3/4 inch chain extending beyond each end. The looper (under thread) shall be hidden between the cover and lining assembly. All repairs shall be in accordance with 3.6.1.1.1a and 3.6.1.1.1b using 301 stitch type.

3.6.1.3 Types 502, 503, 504, 515, 516 and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.1.1a and 3.6.1.1.1b except substitute 3/4 inch for 1 inch wherever 1 inch appears.

3.7 Manufacturing operations requirements. The hood shall be manufactured in accordance with the operations specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished hood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut hood. a. Cut the hood in strict accordance with patterns which show shape, directional lines, placement of components and notches for proper assembly. Directional lines on knit fabric shall be placed in the wales direction. NOTE: Care should be taken when cutting to prevent ravelling while handling. b. The cover layer parts of each hood shall be cut from the same piece of material. The lining parts for each hood shall be cut from the same piece of material. c. Cut elastic cord 17-3/4 ± 1/4 inches in length. Cut the webbing for pull tab 2-1/2 ± 1/4 inches in length.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as classified in 4.4.2, are excluded and replaced with non-defective and properly shaded material. NOTE: Use of a ballpoint needle for stitching operations has been found to prevent the cutting of yarns. (See 6.6).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. The component parts of the hood shall be marked to ensure a uniform shade throughout the hood. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on type tickets. c. Adhesive type tickets which leave an impression or traces of paper or adhesive on the material upon removal of the tickets.						
4.	Make pull tab. Fold each end of pull tab with raw edge turned under and center one 3/4 ± 1/16 inch bartack across width of tab with bartack 1/16 to 1/8 inch from turned edges.	Bartack	EFb-1	38-42 per bartack	40	50	
5.	Make cover layer.						
	a. Safety-stitch each side cover to center top cover from base of hood to face opening distributing fullness of side cover into center top cover between notches. The stitch margin shall be 3/8 ± 1/16 inch.	515, 516 or 519	LSbm-3(a)	8-12	40	50	
	b. Turn the seams toward the center and raise stitch 1/4 inch from the seam.	401	LSbm-3(b)	8-12	40	50	
	c. Safety-stitch front edge of each side cover to center neck cover from base of hood at throat to face opening forming tuck as indicated by marks on pattern. The tuck shall finish down. The tuck should finish 5/8 ± 1/8 inch. The stitch margin shall be 3/8 ± 1/16 inch.	515, 516 or 519	LSbm-3(a)	8-12	40	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make cover layer. (cont'd)						
	d. Turn the seams toward the center front and raise stitch 1/4 inch from seam.	401	LSbm-3(b)	8-12	40	50	
6.	Make lining and attach label.						
	NOTE: The face side of lining fabric shall finish toward the wearer).						
	a. Center label between sides of center top lining with bottom edge of label 2-1/4 ± 1/4 inches from bottom edge of center top lining. Attach label to face side of lining with one row of stitching on all four sides 3/8 ± 1/16 inch from edge of label. The stitching shall not penetrate the printing on the label.	301 or 401	LSbj-1	8-12	40	50	
	b. Safety-stitch edge of each side lining to center top lining from base of hood at back of neck to face opening distributing fullness of side lining into center top lining between notches. The stitch margin shall be 3/8 ± 1/16 inch.	515, 516 or 519	LSbm-3(a)	8-12	40	50	
	NOTE: Stitch take-up is greater on lining cloth than on cover cloth. Appropriate tension shall be maintained to assure the length of joining seams of lining are the same length as joining seams of the cover.						
	c. Turn the seam toward the side fronts and raise stitch 1/4 inch from the seam.	401	LSbm-3(b)	8-12	40-	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make lining and attach label. (cont'd)						
	d. Safety-stitch front edge of each side to center neck lining from base of hood at throat to face opening forming tuck as indicated by marks on pattern. The tuck shall finish down. The stitch margin shall be 3/8 ± 1/16 inch.	515, 516 or 519	LSbm-3(a)	8-12	40	50	
	e. Top stitch the seam toward the side fronts 1/4 inch from the seam.	401	LSbm-3(b)	8-12	40	50	
7.	Join lining to cover.						
	a. Position lining and cover, face opening to face opening. (NOTE: The face side of lining shall be placed against outside of surface of cover). With raw edges of face opening staggered, join cover to fullness of side cover into center top cover between notches. The stitch margin shall be 3/8 ± 1/16 inch.	401	SSe-2(a)	8-12	40	50	
	b. Position seams to lay flat against lining and single stitch and the three layers together around the face opening 1/16 to 1/8 inch from edges.	301		10-14	50-3	50-3	
	c. Center abutted ends of elastic cord on seam allowance at center top cover and attach to cover seam allowance with a 1/2 ± 1/16 inch bartack placed through each end of elastic cord. The long dimension of each bartack shall be in the length direction of the cord.	Bartack		24-28 per bartack	40	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Join lining to cover. (cont'd)						
	d. 3-3/4 inches of the elastic cord shall extend between the center neck cover seams. Two 3/4 ± 1/16 inch vertical bartacks shall be superimposed on the center neck cover joining seams (through elastic cord) to hold the specified amount of elastic in the center neck portion of the face opening. A third 3/4 ± 1/16 inch vertical bartack shall be placed in the top center cover portion of the face opening, penetrating the elastic cord.	Bartack		24-28 per bartack	40	50	
	e. Turn hood to finished position. Stitch around facial opening 3/4 to 7/8 inch from turned edges, creating a tunnel for elastic. Do not catch elastic in stitching. Pull tab shall be caught in tunnel stitching.	401	SSe-2(b)	8-1	40	50	
	f. With bottom edges of lining and cover even, join lining to cover with overedge stitch around the bottom. The stitch gauge shall be 3/16 to 1/4 inch.	503 or 504	SSa-1	6-10	B	B	
8.	Bartack pull tab.						
	a. Position pull tab on outside of center neck cover between the center neck joining seams.	Bartack		38-42 per Bartack	B	B	
	b. Center a 3/4 ± 1/16 inch bartack across pull tab with bartack superimposed on tunnel stitching.	Bartack		38-42 per Bartack	B	B	
9.	Clean hood.						
	Unless otherwise specified, trim all ends to a length of not more than 1/4 inch. Remove loose threads. Remove all spots and stains and shade markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil/ Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The finished measurements shall conform to table III.

TABLE III. Hood measurements (in inches)

Length 1/	17-1/4	± 1
Width 2/	11-1/4	± 3/4
Face Opening 3/	9-1/2	± 1/2

1/ Place hood face side up on a flat surface, align bottom edges of front and back, and butt top and bottom edges of face opening. With hood in this position, measure length in a straight line from folded edge of crown at highest point to bottom of hood.

2/ With hood positioned as indicated in footnote 1/, measure across the hood in a straight line from folded edge to folded edge. The line of measurement shall be perpendicular to the length measurement and 1/2 to 1 inch below the tuck.

3/ Fold hood in half lengthwise so fold runs in the length direction of the center top cover and center neck cover. Place folded hood on flat surface with edges of face opening even. Place one hand on neck end of face opening, holding hood against surface. With other hand, slide top of hood along surface toward back of hood until curvature along side edges of face opening approximates a straight line. With hood in this position, measure along the edge face opening from fold at center of top cover to fold at center of neck cover.

3.9 Workmanship. The finished hood shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified 4.4.2 and 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of hoods. The sample unit shall be one hood. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 4.0 for total (major and minor combined) defects.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor
Material (lining and cover)	Any cut, hole, tear, needle chew, or weakening defect in material.	X	
	Variation in shade within a part or between parts.		X
	Any mend or patch		X
Cleanness	Spot or stain on outside.		X
	Thread ends not trimmed as specified or loose threads not removed.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Cleanness (cont'd)	Any shade marking not removed.		X
	Any holding or basting threads visible on outside of hood.		X
Component and assembly	Any component not cut in accordance with directional lines on patterns.	X	
	Face side of lining not toward wearer.	X	
Seams and stitching	Open seam.		
	- 1/2 inch or less		X
	- More than 1/2 inch	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or two or more consecutive skipped or run-off stitches occur.		
	Seam not repaired as specified.		X
	Loose stitching resulting in a loosely secured seam.	X	
	Tight tension resulting in cutting of material or breaking of stitches when normal pull is applied.	X	
	Seam type not as specified.		X
	Stitch gauge or stitch margin not as specified.		X
	More or less than specified number of stitches per inch.		X
	Ends of seams not secured as specified.		X
	Seam twisted, puckered, or pleated.	X	
	Raw edges:		
	- 1/2 inch or less		X
	- More than 1/2 inch	X	
	Any bartack missing, not length specified.	X	
	Any bartack not positioned as specified, except on center top lining.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Seams and stitching (cont'd)	Bartacks on center top lining not positioned as indicated on patterns.	X	
	Looper thread of 401 stitch not hidden between the cover and lining assembly.	X	
Elastic cord	Cord caught in stitching other than where specified, or caught in bartack stitching.	X	
Tuck on center	Missing.	X	
Neck cover	Not size specified.		X
Pull tab	Not secured as specified.	X	
	Turned end does not face wearer.		X
Label	Missing, illegible, or incorrect.	X	
	Not positioned as specified.		X
	Not stitched on four sides.		X

4.4.3 End item dimensional examination. The end items shall be examined for the dimensions specified in 3.8. Any dimension not within the specified tolerance shall be scored as a defect. The lot size shall be expressed in units of hoods. The sample unit shall be one hood. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components such as: incomplete sealing or closure of container flaps, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container.
Content	Number of hoods per shipping container is more or less than specified. 1/

1/ For this defect, one shipping container shall be examined.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each hood shall be laid flat and folded in half to measure approximately 10 by 8 inches. Each hood shall be unit packed in a bag conforming to A-A-50083.

5.1.2 Commercial. Hoods shall be preserved in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Ninety hoods, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 24 inches in length, 20 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Ninety hoods preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) of SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 24 inches in length, 20 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III, as specified in the appendix of PPP-B-636.

5.2.3 Commercial packing. Hoods, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), hoods packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type 1a of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 90 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

5.4.1 Unit packs. Bagged unit packs shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6. NOTES

6.1 Intended use. The hood is intended for use as a component of the Extended Cold Weather System.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When a first article is required (see 3.2, 4.3, and 6.4).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. Type and class of unit load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 Sample and shade samples. For access to sample of the end item and shade samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting offer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

6.6 Recommended needles. Materials used to construct this item are susceptible to running. It is recommended that the following needles be used since they have been found to alleviate this problem.

Schmetz U4 147 GS S4 7475 - for double needle machines.

Schmetz #19 135 X 17 SU12 - for single needle machines.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing.

Balaclava
Clothing
Extended cold weather system
Hood

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:


Navy - MC
Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

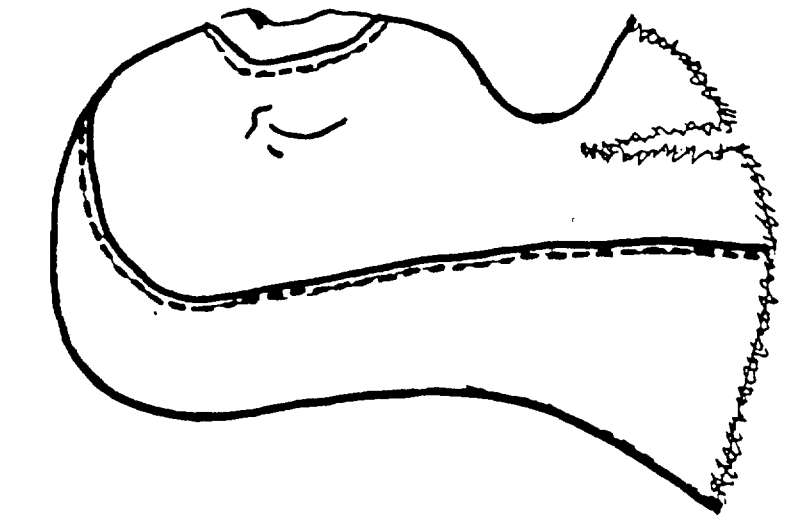

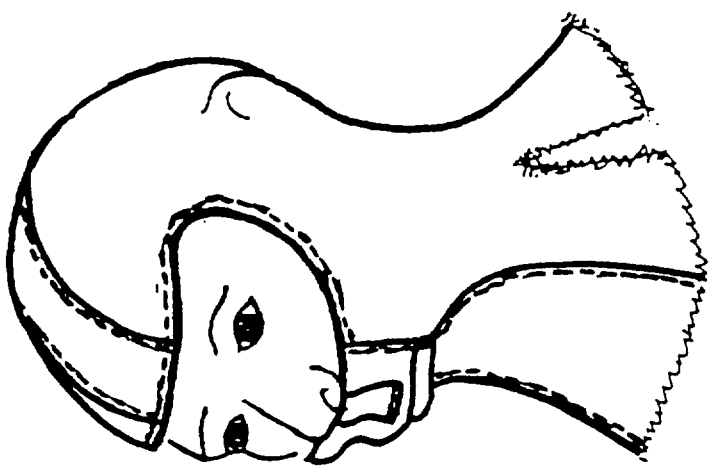


Figure 1 HOOD, BALACLAYA

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H-44302	Hood, Balaclava, Extended Cold Weather

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP 1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.