INCH-POUND

MIL-L-44299A
13 June 1990
SUPERSEDING
MIL-L-44299
30 September 1987

MILITARY SPECIFICATION

LINER, COMBAT VEHICLE CREWMEN'S COVERALL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a two-piece, snap-in, insulating liner of quilted aramid batting material for the combat vehicle crewmen cold weather coveralls.

1.2 Classification. The liner shall be in the following sizes, as specified (see 6.2).

Schedule of sizes

Short	Regular	Long
X-small	X-small	X-small
Small	Small	Small
Medium	Medium	Medium
Large	Large	Large
X-large	X-large	X-large

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
DDD-L-20	-	Label. for Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43636	-	Thread, Aramid
MIL-W-43685	-	Webbing, Tape, Textile, Aramid Fiber
MIL-C-43774	-	Cloth, Plain or Pajama Check Weave, Aramid
MIL-T-44100	-	Thread, Para-Aramid, Spun, Intermediate Modulus
MIL-B-81813	-	Batting, Aramid, or Novoloid Fiber, Quilted

STANDARDS

FEDERAL

FED-STD-595	-	Colors
FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

2 1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of solicitation.

Department of the Army Technical Manuals

TM 10-280- Field Laundering

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (See 6.3) in accordance with 4.3.

3.2 Samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3 3.1 Basic Material The basic material shall be batting, aramid or Novoloid fiber, quilted, conforming to MIL-B-81813. The color of the outercovering cloth shall be Olive Green 106. The color of the needle thread shall be Olive Drab.

3.3.2 Front extensions and binding. The material for the front extension and binding shall be 3 ounces per square yard aramid cloth conforming to MIL-C-43774. The color shall be Olive Green 106.

3.3.3 Thread. The thread shall be aramid, Camouflage Green 483, matching color chip 34094 of FED-STD-595 size E and B conforming to type I of MIL-T-43636, and shall be used in accordance with the requirements of table II. As an alternate, MIL-T-44100 para-aramid, spun, Camouflage Green 483, size T-35, two-ply thread may be used for all operations. When no standard sample is available, the thread shall show "good" fastness to laundering.

3.3.4 Labels Each coat and trouser liner shall have a class 2 size label, a class 1 identification label, and a class 3 instruction label conforming to type VI of DDD-L-20 The color shall be medium green Cable No. 70034, 70130 or 70131 and the colorfastness to laundering shall apply.

3.3.4.1 Size label. The size label shall contain the Size and Stock No. of each coat and trouser liner. Descriptive information shall be printed in letters and numerals not less than 10-point.

3.3.4.2 Instruction label. The instruction label shall contain the following information:

LINER, COMBAT VEHICLE CREWMEN'S COVERALL:

1. Wear with coveralls for extra warmth.

2. Dry liner and coveralls separately when damp or wet.

3. Wash by hand or machine launder in accordance with Formula I, TM 10-280. Rinse thoroughly and drip or machine dry.

4. After 10 laundering cycles and thereafter, launder in accordance with Formula IX (no bleach) of TM 10-280, field laundry and Natick Formula X, fixed laundry for the retreatment of anti-static agent.

3.3.4.3 Combination label. The size and identification labels may be combined into one label, or the size, identification and instruction labels may be combined into one label, type IV, class 14 conforming to DDD-L-20.

3.3.5 Snap fasteners. The snap fasteners shall conform to style 2A, brass, finish 2, male and female complete, consisting of stud and eyelet and socket eyelet (uncapped button) sizes 1 or 2 conforming to MIL-F-10884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3.3.6 Sleeve tabs. The tabs shall be made of 5/8 inch wide aramid fiber webbing conforming to type I of MIL-W-43685. The color shall be Olive Green 106.

3.4 Design. The liner shall consist of a separate coat and trouser components secured together by snap fasteners.

3.5 Patterns. Standard patterns which provide a seam allowance of 1/2 inch for all joining seams (to finish at least 3/8 inch wide) and 3/8 inch for front extensions, will be furnished by the Government. The Government patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the Government patterns.

3.5.1 Pattern parts. The components of the liners shall be cut from the material as specified and in accordance with the number of parts indicated in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Batting, aramid, quilted	Coat front	2
	Coat back	1
	Front sleeve	2
	Back sleeve	2
	Trouser front	2
	Trouser back	2
Cloth, aramid	Coat front extension	2

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figures are furnished solely for guidance and information. Should variation from the specification appear in figure 1 or figure 2, the specification shall govern.

3.6.1 Stitches, seams and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. When two or more methods of seams or or stitches are given for the same operation, any one may be used.

3.6.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3.6 1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-out occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. When damaged thread has been removed needle holes do not constitute damage to the material. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.6.1.2 Type 401, 502, 503, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching, or excessively tight stitching resulting in puckering of the materials sewn. All repairs shall be in accordance with 3.6.1.1.1a and b. Repairs to stitch type 401 may be accomplished by use of stitch type 301.

3.6.1.3 Bartack. The bartacks shall measure 1/2 to 5/8 inch in length and 1/8 $\pm$ 1/32 inch wide.

3.6.1.4 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the liner.

3.6.1.5 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met, and at least three or more tying, overlapping, or back stitches are used to secure the ends of stitching.

3.6.1.6 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.7 Manufacturing operation requirements. The liners shall be manufactured in accordance with the operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible, provided the thread is removed or does not show on the finished liner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut liner. a. Cut the liner in strict accordance with patterns furnished, which show size, directional lines and notches for assembly of parts. b. Cut all parts of the quilted batting out of one piece of material. Sleeves may be cut from ends; when so cut they shall match each other. The face side of the liner parts (side with OD thread in the dumbell pattern) shall face the wearer (see 3.3.1). c. The material for the binding shall be cut on the bias to finish 1/2 to 5/8 inch wide. The front extension pieces shall be cut in the warp direction. d. Lay fronts and backs of trousers so that the directional line is in the warp direction. e. Cut webbing for sleeve tabs to finish in accordance with dimensions specified in operation 6a.						
2.	Replacement of damaged parts. a. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of damaged parts. (cont'd) b. Replace any part damaged during the manufacturing process such as a needle chew, cut, tear, hole, mend, exposed drill hole, or more than 1-1/2 inches of broken stitches in the quilting pattern. NOTE: Broken stitches in the quilting pattern shall be repaired by stitching back of each end of break not less than 1 inch.						
3.	Shade and size marking. Mark, ticket, or bundle all parts of the liner to insure a uniform shade and proper assembly throughout the liner. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on tickets. c. Adhesive type tickets which leave an impression or traces of paper or adhesive on the material after removal of the ticket. Make coat						
4.	Attach labels. a. Stitch the labels on all four sides to the inside center of back (1 inch off center tolerance) as follows: (1) Size label - 1 to 1-1/2 inches below neck edge. (2) Identification label - the top edge abutting the bottom edge of size label or caught in the stitching.	301	LSbj-1	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Attach labels. (cont'd) (3) Instruction label - the top edge abutting the bottom edge of the identification label or caught in the stitching. (4) Combination size and identification label (when used) shall be positioned as in (1) above with the instruction label positioned as in (2) above. (5) Combination size, identification, and instruction label (when used) shall be positioned as in (1) above.						
5.	Make sleeves.						
	a. Join front sleeves to back sleeves forming pleats at back arm seam as indicated by marks on pattern by overedging and stitching the raw edges in one operation. The outside fold of pleats shall face toward the bottom of sleeves on the finished liner.	515 or 516 or 519	LSbm-3(a)	10-14	E (seaming row) B (all overedge stitching thread)	B B	
	b. Turn seams toward front sleeve and raise stitch 3/16 to 1/4 inch from turned edges.	301 or 401	LSbm-3(b)	10-14	E E	E B	
6.	Make and attach sleeve tabs.						
	a. The finished length of the tab shall be 2-3/4 ± 1/8 inches.						
	b. Fold the tape lengthwise 1/2 ± 1/16 inch off center and secure with the socket portion of the snap fastener located 3/4 to 1 inch from the fold edge and center on the long side of the folded tape.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make and attach sleeve tabs. (cont'd)						
	c. Fold the long end of the tape over the short end with the raw edge of the short end butted to the fold. Position the tabs as indicated by marks on pattern on each bottom of each side of sleeve opening with the socket portion of the snap fastener facing outside. Sew to sleeve with a box with cross stitch pattern 5/8 by 3/8 ± 1/8 inch.	301		10-14	E	E	
7.	Make body.						
	a. Join fronts to backs at sides and shoulders by overedging and stitching the raw edges in one operation, respectively.	515 or 516 or 519	LSbm-3(a)	10-14	E (seaming row) B (all overedge stitching thread)	B B	
	b. Turn seams toward back and raise stitch 3/16 to 1/4 inch from turned edges.	301 or 401	LSbm-3(b)	10-14	E E	E B	
8.	Set sleeves.						
	a. Set sleeves to armhole by overedging and stitching in one operation. NOTE: Sleeves may be shirred prior to setting.	515 or 516 or 519	LSbm-3(a)	10-14	E (seaming row) B (all overedge stitching thread)	B B	
	b. Turn seam allowances toward body and raise stitch 3/16 to 1/4 inch from turned edges.	301 or 401	LSbm-3(b)	10-14	E E	E B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Overedge stitch coat edges.						
	a. Overedge stitch remaining raw edges of coat which include the neck, fronts, coat bottom, sleeve bottoms, side sleeve openings, sleeve forearm opening, and underarm opening.	502 or 503	EFd-1	6-10	B	B	
10.	Binding.						
	a. Bind neck, bottom and front edges, side sleeves, openings, sleeve bottoms, sleeve forearm opening, and underarm opening.	301	BSc-1	10-14	E	E	
	b. The raw finished ends of binding shall be turned in and caught in the stitching; or may be turned over binding to the outside of liner and tacked.	301		10-14	E	E	
11.	Make and attach front extensions.						
	a. Fold front extensions in half and stitch ends 3/8 $\pm$ 1/16 inch from edges.	301 or 401	SSe-2(a)	10-14	E E	E B	
	b. Turn, force out edges and points, and with the remaining raw edges turned to the inside, stitch along all four sides 1/16 to 1/8 inch from edges.	301	SSe-2(b) and OSf-1 and SSc-1	10-14	E	E	
	c. Secure three socket portions of snap fasteners to each front extension piece, positioned as indicated by marks on pattern.						
	d. Position front extensions on inside of coat with front ends even with the finished edges of front opening and the bottom coat overlapping extension	301	LSa-1	10-14	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make and attach front extensions. (cont'd) pieces 5/8 to 3/4 inch and stitch along top edges of extension pieces 1/16 to 1/8 inch from edges. The socket portions of snap fasteners shall face toward the outside of coat.						
12.	Attach snap fasteners. Secure snap fasteners at front opening as indicated by location marks on pattern. (1) Three stud portions to right front edge, with studs facing toward outside of coat. (2) Three socket portions to left front edge, with sockets facing toward inside of coat.						
13.	Bartacking. Place a horizontal bartack at each end of the top edge of each front extension 1/16 to 1/8 inch below the stitching.	Bartack	———	28 per bartack	E	E	
	Make trousers						
14.	Join inseams.						
	a. Join inseams by overedging and stitching the raw edges in one operation, forming pleats. The outside fold of pleats shall face toward the bottom of the finished trousers.	515 or 516 or 519	LSbm-3(a)	10-14	E (seaming row) (all overedge stitching thread)	B	
	b. Turn seams toward back and raise stitch 3/16 to 1/4 inch from turned edges.	301 or 401	LSbm-3(b)	10-14	E E	E B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Join seat and crotch seam.						
	a. Join the seat seam by overedging and stitching the raw edges in one continuous operation.	515 or 516 or 519	LSbm-3(a)	10-14	E (seaming row) B (all overedge stitching thread)	B B	
	b. Join the crotch seam by overlapping and stitching the raw edges in one continuous operation.	515 or 516 or 519	LSbm-3(b)	10-14	E (seaming row) stitching thread)	B	
	c. Turn seam and raise stitch 3/16 to 1/4 inch from turned edges.	301 or 401	LSbm-3(b)	10-14	E E	E B	
16.	Join outseams.						
	a. Join outseams by overedging and stitching the raw edges in one operation, starting and ending at notches for side openings, forming pleats. The outside fold of pleats shall face toward the bottom of the finished trousers.	515 or 516 or 519	LSbm-3(a)	10-14	E (seaming row) B (all overedge stitching thread)	B B	
	b. Turn seams toward back and raise stitch 3/16 to 1/4 inch from turned edges.	301 or 401	LSbm-3(b)	10-14	E E	E B	
17.	Overedge stitch trouser edges.						
	Overedge stitch remaining raw edges of trousers which include crotch opening, waist, front opening, side openings (top and bottom), and trouser bottoms.	502 or 503	EFd-1	6-10	B B	B B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Binding.						
	a. Bind the following edges:	301	BSc-1	10-14	E	E	
	(1) Top edges of fronts and back, and the edges of side and front openings in one continuous operation. (2) Each leg bottom and side opening in one continuous operation. (3) Each crotch opening.						
	b. The raw finished ends of binding shall be turned in and caught in the stitching; or may be turned over binding to the outside of liner and tacked.	301		10-14	E	E	
19.	Attach labels.						
	a. Stitch the labels on all four sides to the inside center of back (1 inch off center tolerance) as follows:	301	LSbj-1	10-14	E	E	
	(1) Size label - 1 to 1-1/2 inches below finished waist. (2) Identification label - the top edge abutting the bottom edge of size label or caught in the stitching. (3) Instruction label - the top edge abutting the bottom edge of the identification label or caught in the stitching. (4) Combination size and identification label - when used, shall be positioned as in (1) above with the instruction label positioned as in (2) above. (5) Combination size, identification, and instruction label (when used) shall be positioned as in (1) above.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

NO	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach snap fasteners. Secure snap fasteners as indicated by location marks on pattern. (1) Six stud portions to each front piece at waist level. The two most outbound studs and the stud centered directly between the outbound studs for each front shall face to the outside of the trouser. The three remaining studs on each front shall face towards the inside of the trouser. (2) Three socket portions to back waist and four to leg bottoms (two each leg), with sockets facing toward outside of trousers.						
21.	Bartacking.						
	a. Overlap bound edges of side openings (top) (fronts over backs) and place a horizontal bartack through bound edges at bottoms of openings.	Bartack	_____	28 per bartack	E	E	
	b. Overlap bound edges of front opening (left front over right front) and place a horizontal bartack through bound edges at the bottom of the opening.	Bartack	_____	28 per bartack	E	F	
	c. Place a horizontal bartack at the top of the back crotch opening.	Bartack	_____	28 per bartack	E	E	
22.	Clean liner. a. Trim and remove all thread ends. b. Remove all spots and stains. c. Remove all size markings.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

3 8 Finished measurements The finished measurements for the liner shall conform to table III.

TABLE III. Finished measurements (in inches)

	Short	Regular	Long
1/2 Chest 1/:			
X-small	21	21	21
Small	23	23	23
Medium	25	25	25
Large	27	27	27
X-large	29	29	29
Tolerance ± 3/4			
1/2 Waist 2/.			
X-small	18	18	18
Small	20	20	20
Medium	22	22	22
Large	24	24	24
X-large	26	26	26
Tolerance ± 1/2			
Sleeve inseam 3/:			
X-small	17	18	19
Small	17	18	19
Medium	17	18	19
Large	17	18	19
X-large	17	18	19
Tolerance ± 1/2			
Leg inseam 4/:			
X-small	23	25	27
Small	23	25	27
Medium	23	25	27
Large	23	25	27
X-large	23	25	27
Tolerance ± 1/2			

1/ With liner snapped, measure across front at base of armhole from folded edge to folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

2/ Coat: with liner snapped, measure across waist at binding from folded edge to folded edge.
Trousers: measure from edge to edge across each trouser front and back just below binding and divide total by two.

3/ Measure inseam from underarm opening to bottom of sleeve.

4/ Measure inseam from crotch opening to bottom of leg.

3.9 Workmanship. The finished liner shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

4 3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document

4.4.2 End item visual examination. The coat liners and trouser liners shall be examined separately for the defects listed below. The lot size shall be expressed in units of coat liners or trouser liners as applicable. The sample unit shall be one coat liner or trouser liner as applicable. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 40 for total (major and minor combined) defects.

TABLE IV. End item visual defects

Classification Examine	Defect	Major	Minor
Material defects	Any ply having a hole, cut, tear, smash, burn or needle chew	101	
	Any ply having a darn or mend		201
	Exposed drill hole (in any ply)		202
	One or more rows of stitching omitted in the quilting	102	
	More than 1-1/2 inches of broken or missing stitches in the quilting	103	
	Thick or thin place	104	
	Piecing or splicing of outer covering (either ply)	105	
Cleanness	Any spot or stain on outside		203
	One or more size markings not removed		204
	Thread ends not trimmed or loose threads not removed throughout liner, except ends of quilting stitches		205
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	106	
	Any operation not performed as specified (unless otherwise classified herein)		206
	The liner, coat and trousers, fabricated natural thread of dumbell pattern atitching facing wearer	107	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Cutting	Any cut part not in accordance with directional lines on pattern or in accordance with requirements	108	
Seams and stitching (except quilting stitching)	Accuracy of seaming:		
	-Seams, twisted, puckered, or pleated		207
	NOTE: Aramid fabric has a tendency to pucker at joining seams and at stitchings. The puckering when not so excessive as to seriously affect appearance shall not be classified as a defect.		
	-Part of garment caught in unrelated operation or stitching	109	
	-Ends of stitching backstitched less than 1/2 inch		208
	-Stitching overlapping end(s) of thread break less than 1/2 inch		209
	-Various shades of thread used on outside of same liner		210
	-Ends of a continuous line of stitching overlapped less than 1/2 inch		211
	Gage of stitching and seam allowances:		
	-Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when the condition exists onn major portion of seam)		212
	-Width not as specified or not within range of gage specified or varies more than 6 inch when no range is specified		213
	-Edges or raised stitching sewn too close to edge resulting in damage to the cloth	110	
	Open Seams: (not applicable to quilting stitching):		
	-Any seam open by:		
	-more than 1 inch	111	
	-more than 1/4 inch up to 1 inch inclusive		214

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur. On double stitched seams, a seam is classified as open when either one side or both sides of seam are open.		
	-Raw edges (excluding overedge stitching and end of binding, when not turned under):		
	-more than 1 inch	112	
	-more than 1/4 inch up to 1 inch inclusive		215
	-Any raw edge caused by omision of overedge stitching for a distance of 3 inches or more		216
	NOTE: Raw edges are classified as such when they occur at places where edge is required to be bound, turned under or everedge stitched. Raw edges not securely caught in stitching shall be classified as open seams.		
	Run-off:		
	-Joining seams - when resulting in an open seam use "Open seam" classification	113	
	-Edge or raised stitching (when not resulting in open seam)		217
	Seam and stitch type:		
	-Seam or stitch type not as specified		218
	-Overedge stitched edge on joining seams not finishing on outside of liner		219
	-Looper thread of 401 stitch type on joining seam finishing on inside of seam (LSbm-3 seam type only)		220
	Stitch tension (except bartacks):		
	-Loose tension resulting in a loose seam		221
	-Loose tension on raised or edge stitching		222
	-Tight tension (stitches break when strain is applied to seam or stitching)		223

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting pull in lengthwise direction of seam.		
	Stitches per inch (to be scored only when the condition exists on the major portion of seam; except labels):		
	-Three or more less then minimum specified	114	
	-One or more stitches less than minimum specified on one or more labels		224
	-One or more stitches more than specified		225
	-Skipped stithes (more than 1/4 inch)		226
Bartacks	Any bartack omitted		227
	Loose stitching, incomplete or broken		228
	Any bartack not in specified location		229
	Length or width not as specified		230
Snap fasteners	Any part of assembly missing, mismated, broken, cracked, bent, not securely clinched, affecting function:		
	-two or more snap fasteners	115	
	-one snap fastener		231
	One or more clinched too tightly cutting surrounding fabric	116	
	Loose, i.e., socket or stud spins freely or wobbles in connection portions		232
	One or more having rough or sharp edge	117	
	More than three splits in eyelet or or button barrel		233
Labels (coat and trouser liners)	Size, instruction, or combination label, (when applicable) missing, incorrect, or illegible	118	
	Identification label missing, incorrect or illegible		234
	Any label not stitched on all four sides		235
	Stitching through the printing		236
	Any label off center back by more than 1 inch		237
	Size label (or combination label) less than 1 inch or more than 1-1/2 inches below neck edge or finished waist		238

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
	Identification label not abutting the bottom edge of the size label or caught in the stitching		239
	Instruction label not abutting the bottom edge of the identification label or caught in the stitching		240
Binding	Not caught in fabric, i.e., can be easily pulled away from the edge of fabric	119	
	End of binding not turned under and caught in the stitching or turned over binding to the outside of liner and tacked		241
	Binding stretched, i.e., edges have a wavy appearance		242
	Finishing less than 1/2 or more than 5/8 inch wide		243
Coat liner			
Sleeves	Body lapped on sleeves		244
	Outside fold of pleats not facing toward bottom of sleeves		245
	Back sleeve not lapping front sleeve		246
	Sleeve tabs less than 2-5/8 or more than 2-7/8 inches long		247
Front extensions	Not positioned on inside of fronts	120	
	Front ends not even with finished edges of front opening		248
	Bottom of coat liner overlapping extension pieces less than 5/8		249
	Front extensions reversed	121	
Snap fasteners	Sockets of left front not facing inside of coat liner	122	
	Studs of right front not facing outside of coat liner	123	
	Sockets of front extensions not facing outside of coat liner	124	
	Sockets on sleeve tabs not facing outside of coat liner	125	
Front opening	Opening uneven in length by: -1/4 up to 3/8 inch inclusive		250
	-more than 3/8 inch	126	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Trousers			
Front and side openings	Opening uneven in length by more than 1/4 inch		251
Legs	Outside fold of pleats not facing toward bottom of trouser lining		252
	Front not lapping backs		253
Snap fasteners	Outbound studs and centered studs facing inside of trousers. or inward studs and middle stud facing ouside of trousers	127	
	Sockets of back waist and leg bottoms not facing toward outside of trouser lining	128	

4.4.3 End item dimensional examination. The coat liners and trouser liners shall be examined separately for conformance to measurements specified in table III. Sleeve or leg lengths unequal by more than 1/2 inch or any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of coat liners or trouser liners. The sample unit shall be one coat liner or trouser liner. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components such as: incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling
	Bulged or distorted container

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of bundles per shipping container is more or less than required. Number of coats or trousers per bundle is more or less than required. 1/ Size shown on one or more coats or trousers not as specified on outer container. 1/

1/ For this defect, one bundle froom each container in the sample shall be examined.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation.

5.1.1.1 Coats. Each coat shall be laid flat with the front up. The sleeves shall be folded at right angles across the chest one on top of the other. For the larger sizes, it may be necessary to adjust the sides in order to attain the desired width of approximately 23 inches. The bottom edge of the coat shall be brought up to the shoulder line so that the length measures approximately 14-1/2 inches. For the larger sizes it may be necessary to fold the bottom edge over a few inches to abtain the desired length. Five folded coats of one size only, each alternately reversed top to bottom, shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches in from each end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

5.1.1 2 Trousers. Each pair of trousers shall be laid flat and folded in half along the length with the crotch on the inside. The trouser shall then be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches. Before folding the regular and long trousers it may be necessary to first fold the leg bottoms up a few inches to attain the desired length. For the larger size, it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches. Five folded trousers of one size only shall be neatly stacked in a bundle, alternating waistbands end for end, and securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Commercial preservation. Coats only or trousers only shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A,B, or Commercial as specified (see 6.2).

5.2.1 Level A packing.

5.2.1.1 Coats. Fifteen coats of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered onthe top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping cantainer shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to non-metallic strapping, except for type II, class F loads.

5.2.1.2 Trousers. Fifteen pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s or PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat 3 in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall bave the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with methid III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to mnonmetallic strapping, except for type II, class F loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

5.2 2 Level B packing.

5.2 2.1 Coats. Fifteen coats of one size only, preserved as specified in 5.1, shall be packed if a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 or PPP-B-636. The inside of each shiping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat 3 in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.2 Trousers. Fifteen pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.3 Weather-resistant fiberboard container. When specified (see 6.2), the shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.3 Commercial packing. Coats only or trousers only of one size only, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2) liners, packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall conform to number 3 of the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The liner is intended for use be military personnel of the Department of Defense as an insulating liner for the Coveralls, Combat Vehicle Crewmen's.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. Whether coat or trouser liner, or both are required.
e. When a first article is required (see 3.1, 4.3, and 6.3).
f. Levels of preservation and packing (see 5.1 and 5.2).
g. Type and class of unit load required (see 5.2.1).
h. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
i. When palletization is required (see 5.3).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting offer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Subject term (key word) listing.

Cold weather clothing
CVC
Insulation

Custodians:

Army - GL
Navy - NU

Review activities:

Army - MD
Navy - MC
DLA - CT

Preparing activity:

Army - GL

(Project 8415-0731)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

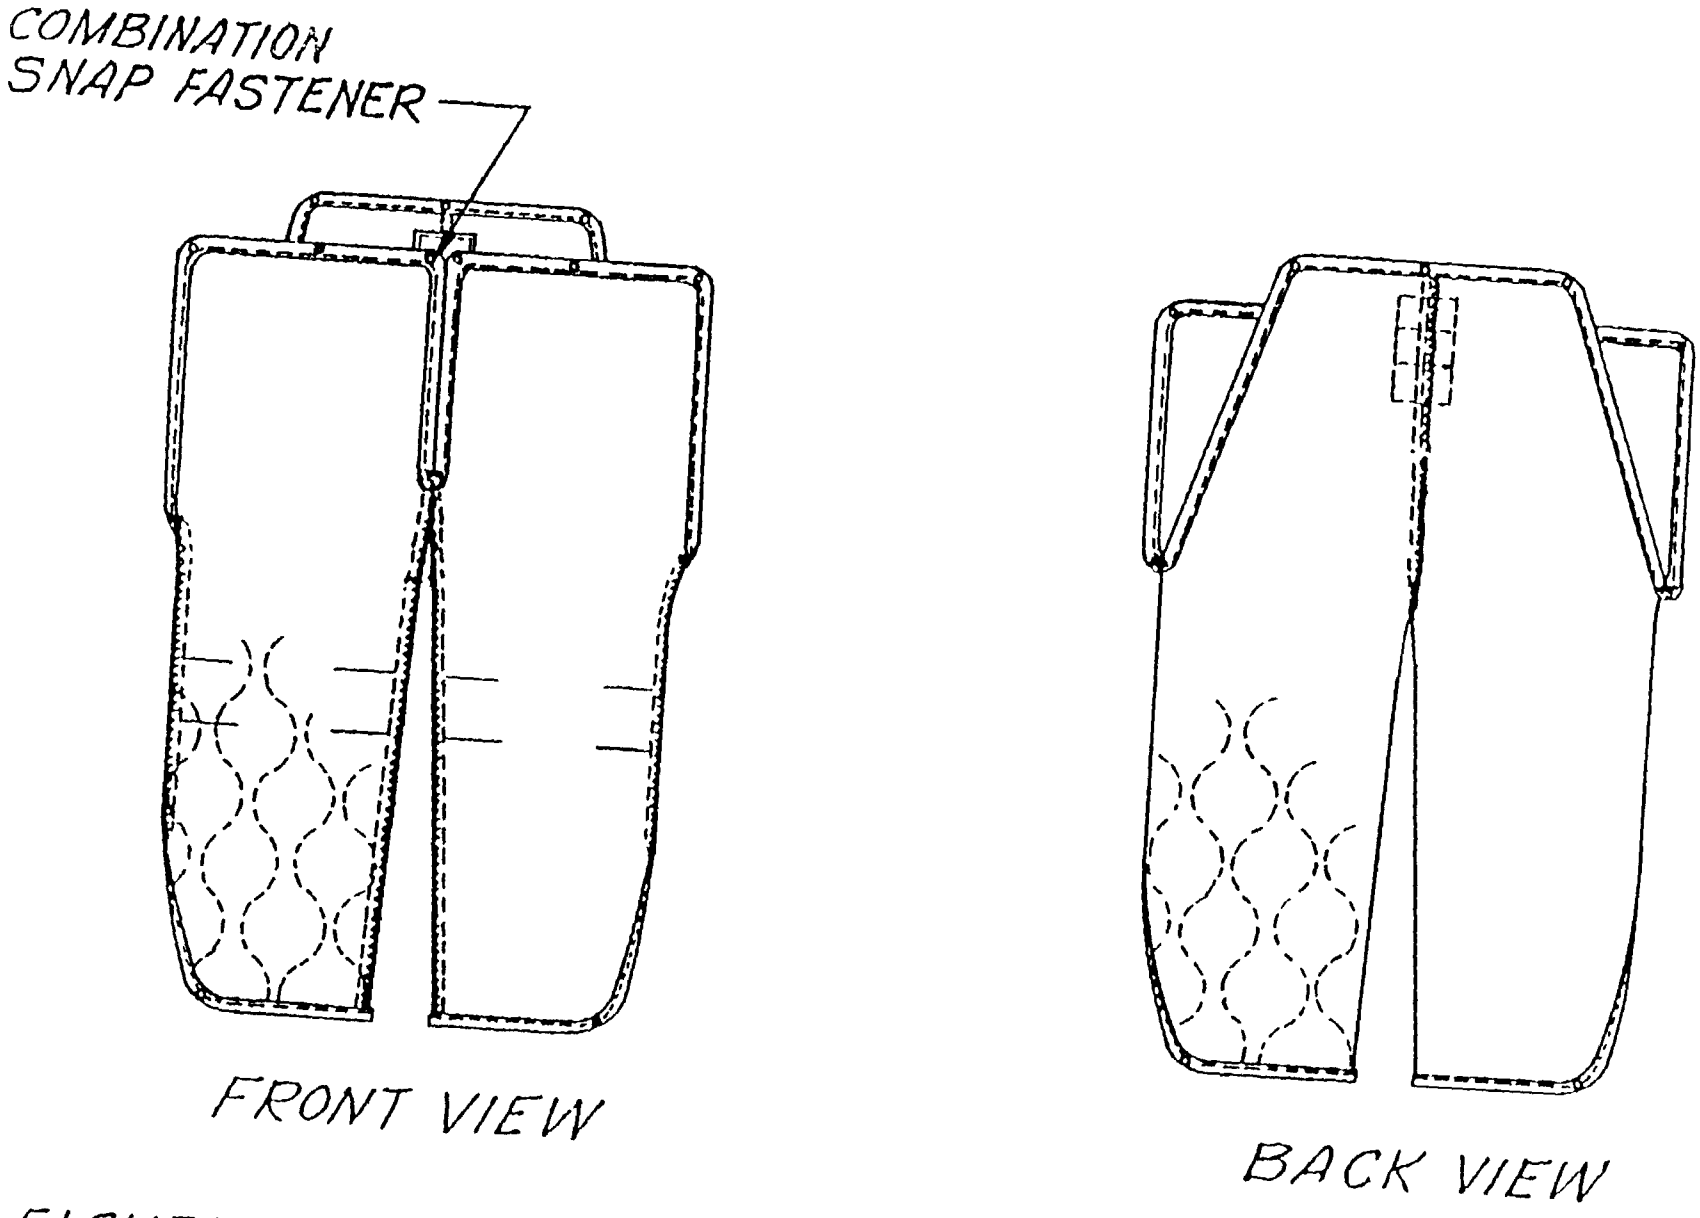


FIGURE 1 - LINER COMBAT VEHICLE CREWMEN'S COVERALLS, COLD WEATHER - TROUSERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

2-1-984

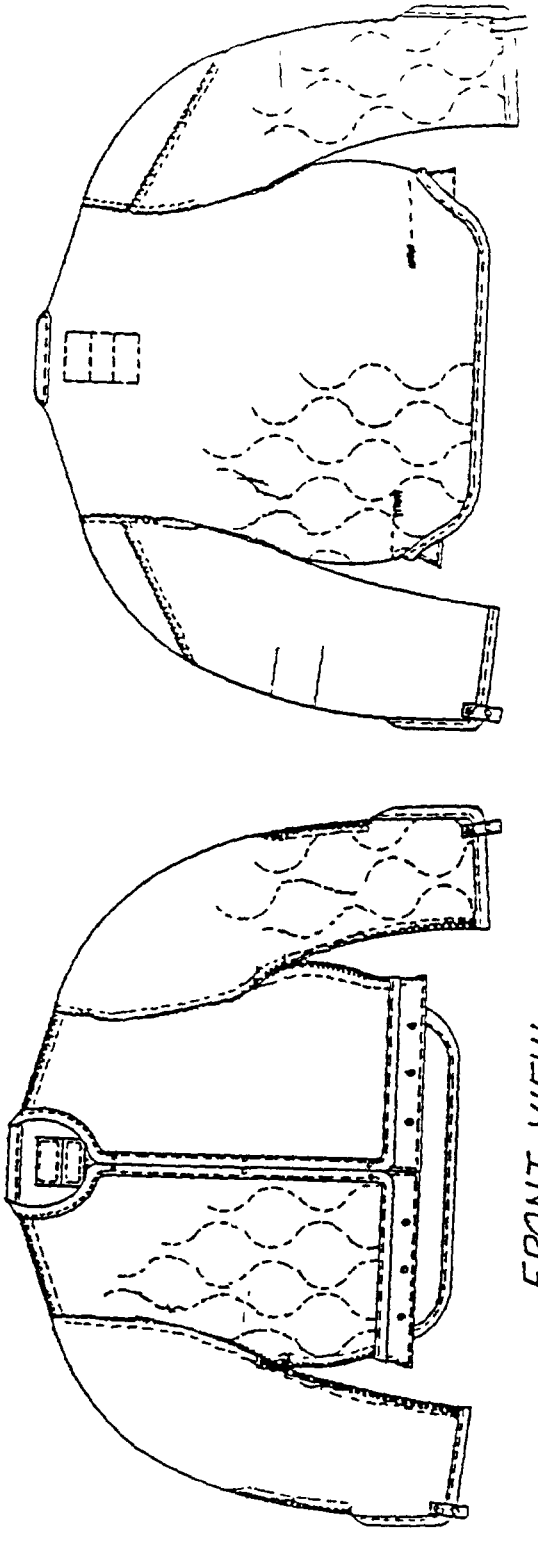


FIGURE 2 - LINER COMBAT VEHICLE CREWMEN'S, COVERALLS, COLD WEATHER - COAT

2-1-785

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-L-44299A	2 DOCUMENT DATE (YYMMDD) 90 June 13

3 DOCUMENT TITLE
LINER, COMBAT VEHICLE CREWMEN'S COVERALL

4 NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)*

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME	b TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U S Army Natick RD&E Center	508-651-5221	256-5221
c ADDRESS (Include Zip Code) Commander, U S Army Natick RD&E Center ATTN STRNC-ES Natick, MA 01760-5014	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 PREVIOUS EDITION IS OBSOLETE. 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:18Z
Check the source to verify that this is the current version before use.