
INCH-POUND
MIL-P-642/13B
31 October 1988
SUPERSEDING
MIL-P-642/13A
27 February 1979

MILITARY SPECIFICATION SHEET

PLUGS, TELEPHONE (TYPE PJ-777, PJ-778) 3 CONDUCTOR, SINGLE, DOUBLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-P-642.

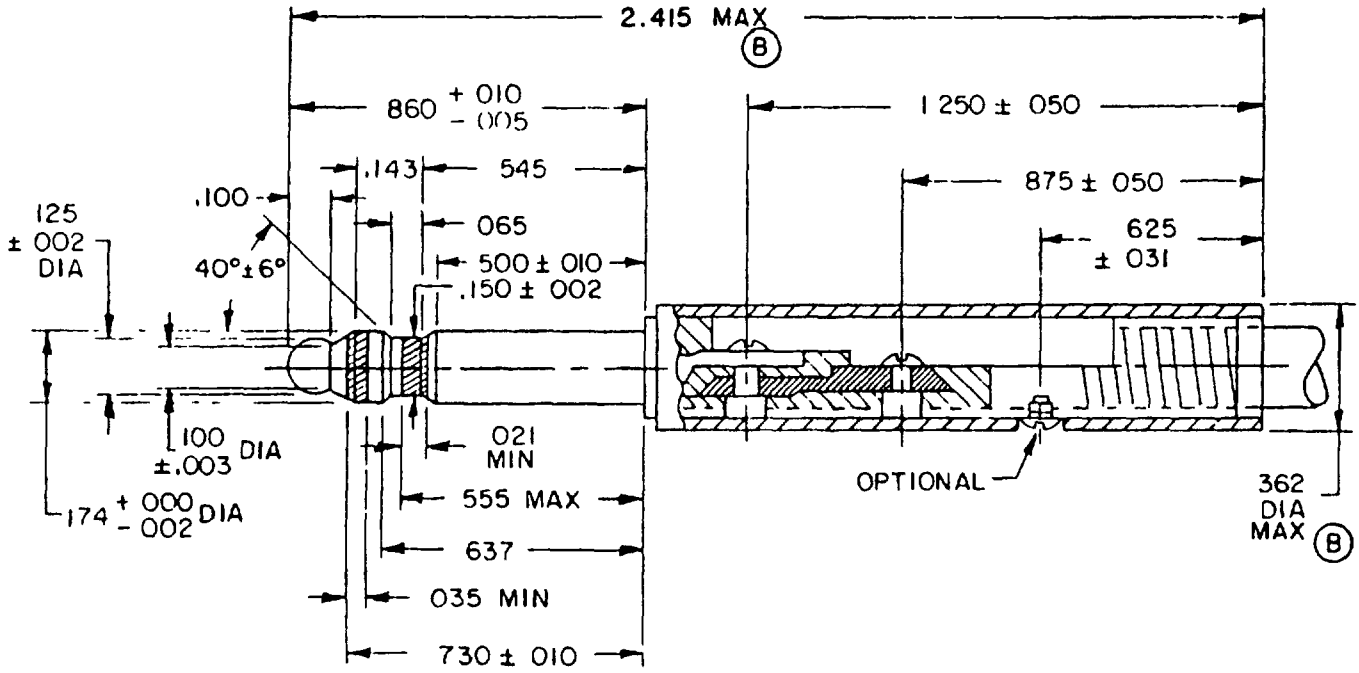


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	05	.035	.89	150	3 81	625	15 88
003	08	050	1 27	174	4.42	637	16 18
005	13	065	1 65	362	9 10	..860	21 84
.010	.25	.100	2.54	.500	12.7	875	22 23
021	.53	125	3 18	545	13.84	1 250	31 75
.031	.79	.143	3 63	.555	14.01	2.415	61 34

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ±.005 and ±1° on angles
4 The material shall be brass
5. All dimensions are after plating
6 Concentricity shall be 003 total indicator
7 During one cycle of insertion and withdrawl test, there will be no shorting or crossover between contacts

FIGURE 1 Plug PJ-777

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-0-18T11:10Z
Check the source to verify that this is the current version before use.

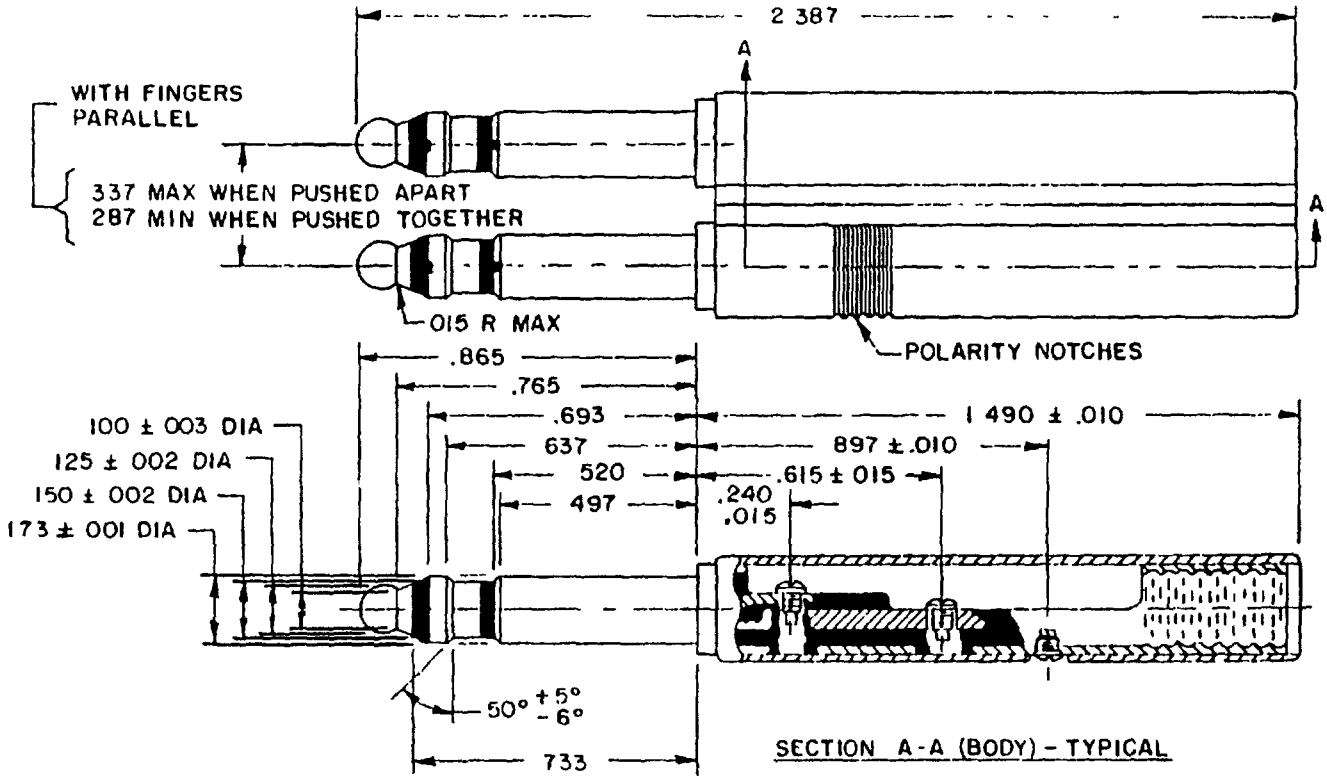

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.02	.125	3.18	.497	12.63	.765	19.43
.002	.05	.150	3.81	.520	13.21	.865	21.97
.003	.08	.173	4.39	.615	15.62	.897	22.79
.010	.25	.240	6.01	.637	16.18	1.490	37.85
.015	.38	.287	7.29	.693	17.60	2.387	60.63
.100	.254	.337	8.56	.735	18.67		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3 Unless otherwise specified, tolerances are ±.005 and ±1° on angles.
4. The material shall be brass.
5. All dimensions are after plating.
6. Concentricity shall be .003 total indicator reading.

FIGURE 2. PLUG PJ-778.

Source: https://assist.dla.mil -- Downloaded: 202640-16T11:10Z
Check the source to verify that this is the current version before use.

REQUIRMENTS:

Dimensions and configuration: See figure 1.

Shell. Shells shall be plastic in accordance with MIL-P-642.

Terminal screws: Terminal screws shall be 0-80 UNF-2A in accordance with MIL-P-642/12.

Mating connector. M641/19, /20, and /21.

Part number: M642/13 - (dash number from table I).

(B) TABLE I. Dash number, type designation, and shell material.

Dash number	Type designation	Shell material
-1	PJ-777B	Black plastic
-2	PJ-777R	Red plastic
-3	PJ-778B	Black plastic
-4	PJ-778R	Red plastic

TABLE II. Dash number and mating jack.

Dash number	Mating jack
-1	M641/19-1 thru -12 M641/20-1 thru -8 M641/21-1 thru -12
-2	M641/19-1 thru -12 M641/20-1 thru -8 M641/21-1 thru -12
-3	M641/20-1 thru -8 M641/21-1 thru -12
-4	M641/20-1 thru -8 M641/21-1 thru -12

Supersession data:

M642/13-1 Supersedes code 82389 part number TT-253.
M642/13-2 Supersedes code 82389 part number TT-254.
(B) M642/13-3 Supersedes code 82389 part number TT-263.
M642/13-3 Supersedes code 82389 part number TT-264.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:10Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, ME, MI
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Army - AV, WC
Navy - AS, MC, YD
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3635)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:10Z
Check the source to verify that this is the current version before use.