INCH-POUND

MIL-DTL-642/14B
08 August 2013
SUPERSEDING
MIL-DTL-642/14A
9 June 2003

DETAIL SPECIFICATION SHEET

PLUGS, TELEPHONE (TYPE U-384/U)

5 CONDUCTOR, SINGLE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-P-642.


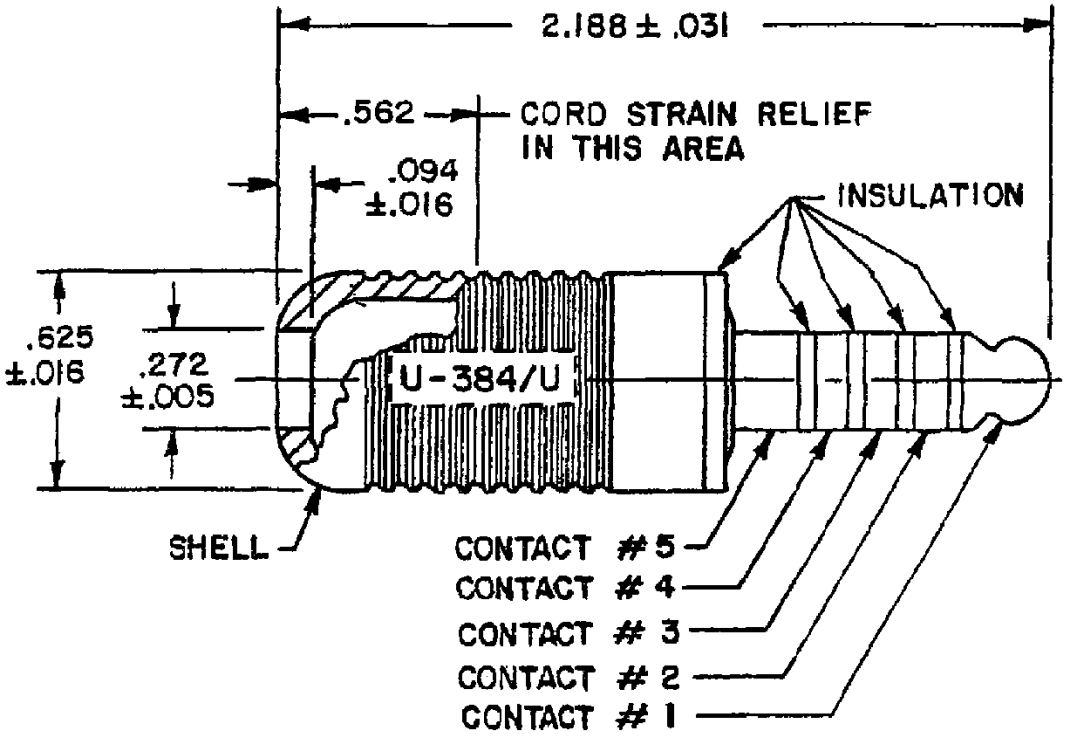


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:10Z
Check the source to verify that this is the current version before use.

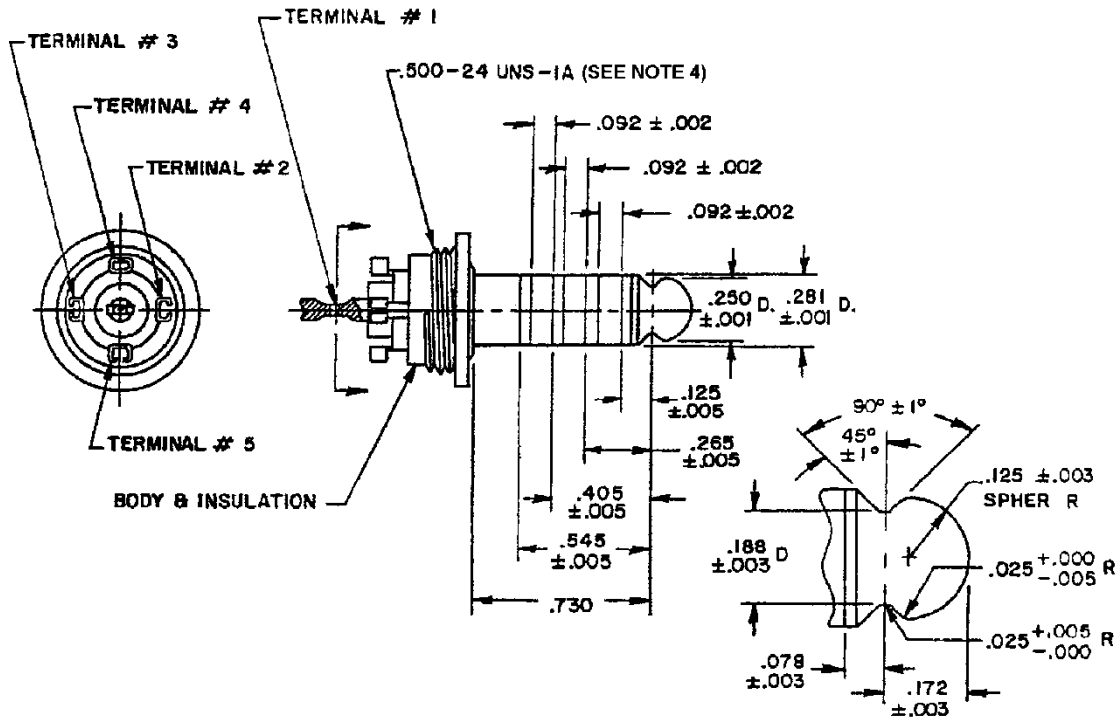

Inch/mm conversion chart					
Inches	mm	Inches	mm	Inches	mm
.001	.02	.092	2.34	.281	7.14
.002	.05	.094	2.39	.405	10.29
.003	.08	.125	3.17	.500	12.70
.005	.13	.172	4.37	.545	13.84
.016	.41	.188	4.77	.562	14.28
.025	.64	.250	6.35	.625	15.88
.031	.79	.265	6.73	.730	18.54
.078	1.98	.272	6.91	2.188	55.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Contact clearances are not cumulative.
4. Thread shall be in accordance with FED-STD-H28.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Shell, body and insulation: Materials shall have electrical and non-electrical properties appropriate for their intended use in electrical components. The shell shall be glass fiber reinforced nylon in accordance with ASTM D4066, black. The body and insulation shall be Penn-Salt Kynar, red.

Contacts: Each of the 5 contacts of the plug shall be of one piece construction. There shall be no mechanical, soldered, or welded joints of any type between the contact area and the solder terminals. The contact material shall be Monel in accordance with QQ-N-281, or equivalent, and shall be abrasion resistant, electrically conductive and rugged enough to comply with this specification without being plated or otherwise treated with preservatives.

Cable clamp: The cable clamp shall anchor cable having diameters from .220 to .275 inches.

Conductor strain relief: The conductor strain relief requirement shall be in accordance with MIL-DTL-642.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as follows:

Insertion force:	10 pounds maximum
Withdrawal force:	6.0 pounds minimum; 10 pounds maximum.

Strain relief: The strain relief test shall be in accordance with MIL-P-642.

Longitudinal pull: The longitudinal pull test shall be in accordance with MIL-P-642.

Static load: The static load test shall be in accordance with MIL-DTL-642.

Stack assembly strength: The stack assembly strength test shall be in accordance with MIL-P-642.

Controlled drop: The controlled drop test shall be in accordance with MIL-P-642.

Solder lug terminals: The solder terminal for each contact shall be so shaped and located to accommodate two No. 23 AWG (21 strands of No. 36) wire.

Weight: The weight of the plug shall not exceed 16 grams.

Marking: The plug shall be marked with the Part or Identifying Number (PIN) and U-384/U.

(PIN): M642/14-01.

Mating connector: M641/22-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:10Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-P-642, this document references the following:

QQ-N-281
FED-STD-H28
ASTM-D4066

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2013-169)

Review activities:
Army - AR, AV, CR4, MI
Navy - AS, MC
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:10Z
Check the source to verify that this is the current version before use.