
MILITARY SPECIFICATION SHEET


PLUGS, TELEPHONE (TYPE PJ-291)

AND ACCESSORY SCREWS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the plugs described herein shall consist of this document and the latest issue of Specification MIL-P-642.

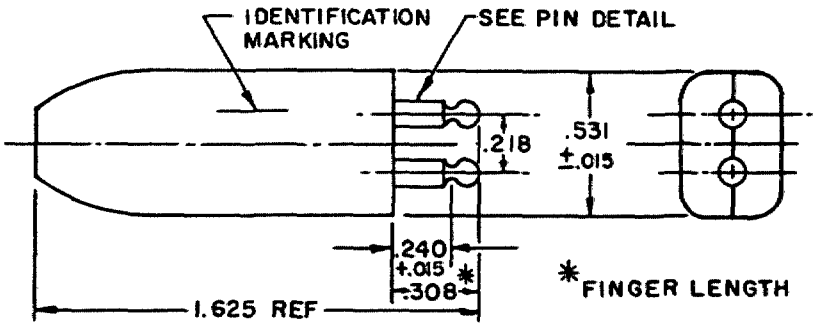

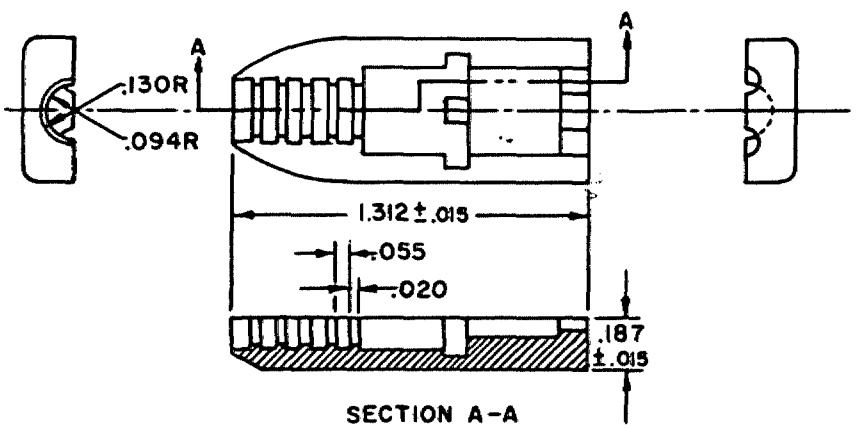


SECTION A-A

SHELL

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

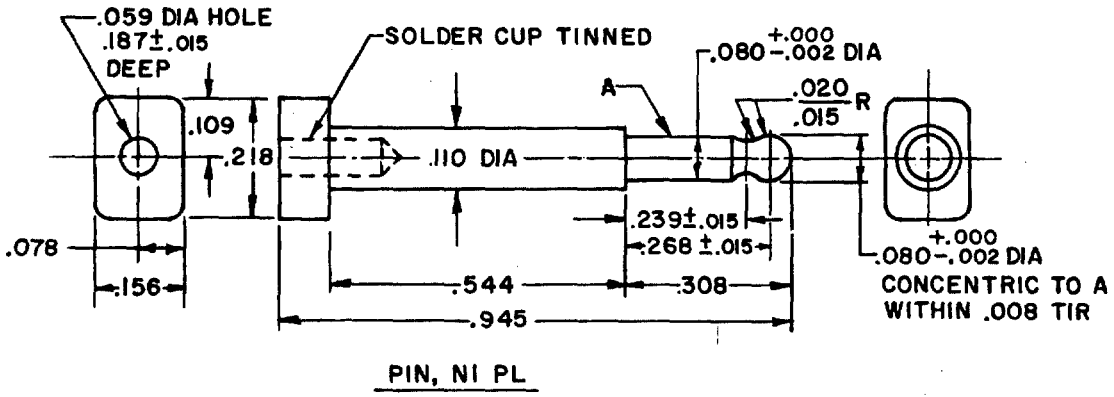

PIN, NI PL

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.094	2.39	.240	6.10
.008	.20	.109	2.77	.268	6.81
.015	.38	.110	2.79	.308	7.82
.020	.51	.130	3.30	.531	13.49
.055	1.40	.156	3.96	.544	13.82
.059	1.50	.187	4.75	.945	24.00
.078	1.98	.218	5.54	1.312	33.32
.080	2.03	.239	6.07	1.625	41.28

FIGURE - Continued.

Part number	M642/6-1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010(.25 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Shell: Shall be black plastic in accordance with MIL-P-642.

Torque test: Not applicable.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, ME, SL, MU
Navy - AS
Air Force - 80
DSA - ES

User activities:
Army - MI, WC, AV
Navy - OS, MC, SH, YD
Air Force - 17

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1803-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.