
MILITARY SPECIFICATION SHEET


PLUGS, TELEPHONE (TYPE PJ-309)

AND ACCESSORY SCREWS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the plugs described herein shall consist of this document and the latest issue of Specification MIL-P-642.

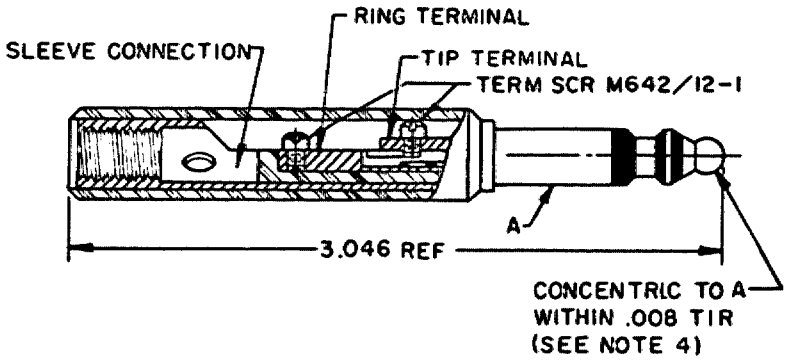

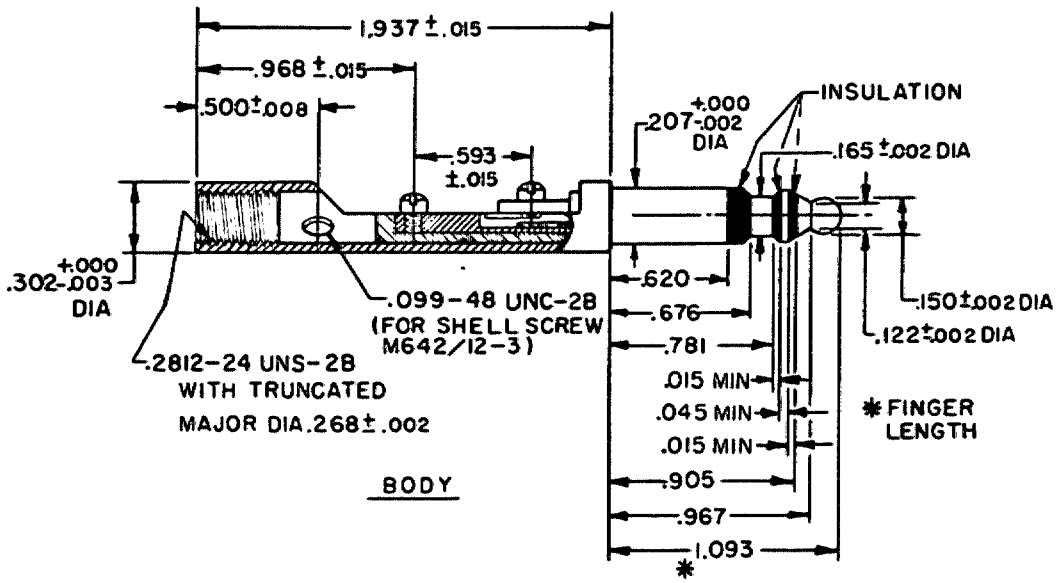


(A) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:09Z
Check the source to verify that this is the current version before use.

Ⓐ

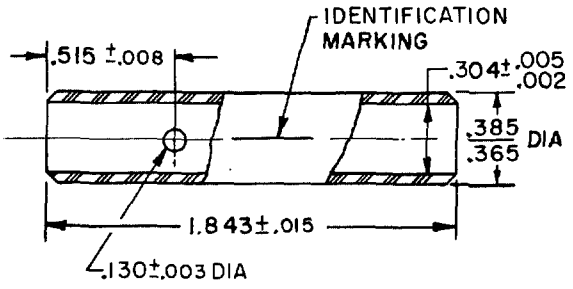

SHELL

INCHES	MM	INCHES	MM
.002	.05	.500	12.70
.003	.08	.515	13.08
.005	.13	.593	15.06
.008	.20	.620	15.75
.015	.38	.676	17.17
.099	2.51	.781	19.84
.122	3.10	.905	22.99
.150	3.81	.967	24.56
.165	4.19	.968	24.59
.2812	7.14	1.093	27.76
.302	7.67	1.843	46.81
.304	7.72	1.937	49.20
.365	9.27	3.046	77.37
.385	9.78		

FIGURE - Continued.

Part number	M642/8-1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010(.25 mm).
4. After assembly, the eccentricity between the end of the shank and the tip of the plug shall not exceed .008(.20 mm) TIR (total indicator reading).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Shell: Shall be red plastic in accordance with MIL-P-642.

Terminal screws: Shall be .086-64 UNF-2A in accordance with MIL-P-642/12.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, ME, SL, MU
Navy - AS
Air Force - 80
DSA - ES

User activities:
Army - MI, WC, AV
Navy - OS, MC, SH, YD
Air Force - 17

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1803-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:09Z
Check the source to verify that this is the current version before use.