
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE, COAXIAL STRAIGHT, HERMETICALLY SEALED PANEL ADAPTER, TWO JACK ENDS, SERIES III, CLASS Y, TYPE 5

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-25516.

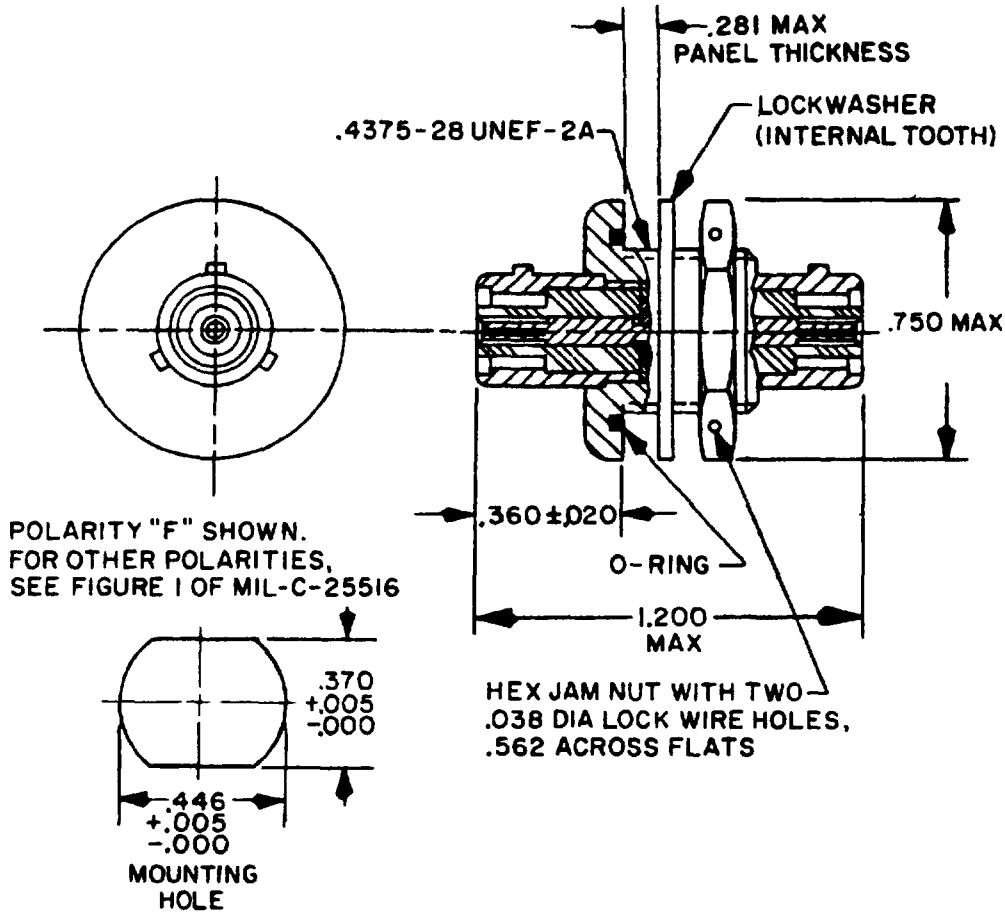

INCHES	MM
.005	.13
.020	51
.038	.97
.281	7.14
.360	9.14
.370	9.40
.446	11.33
.562	14.27
.750	19.05
1.200	30.48

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).
4. Mating dimensions shall be in accordance with MIL-C-25516.
5. The maximum envelope dimensions are 1.200 and .750.
(D) 6. Shell finish shall be cadmium plated per QQ-P-416, type II class 3 over nickel plate per MIL-C-26074, class 1, grade B.

FIGURE 1. Connector, electrical adapter.

(D) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Environmental and Mechanical:
Visual and mechanical inspection: Applicable.
Contact engaging and separating forces: Applicable.
Resistance to test probe damage: Applicable.
Contact retention: Applicable.
Durability: Applicable.
Cable retention force: Not applicable.
Side load: Not applicable.
Hermetic sealing: Applicable.
Thermal shock: Applicable.
Shock: Applicable.
Vibration: Applicable.
High temperature: Applicable.
Fuel immersion. Applicable.
Altitude humidity cycling: Applicable.
Ozone exposure: Applicable.
Corrosion resistance: Applicable.
Sulphide immersion: Applicable.
Maintenance aging: Applicable.

Electrical:
Insulation resistance: Applicable.
Dielectric withstanding voltage: Applicable.
Contact resistance: Outer 7 5 @ 25°C, 15 @ 200°C and after conditioning.
Low signal level contact resistance: Not applicable.
Shield clamp resistance: Not applicable.

Part number: M25516/18- (dash number from table I) 1/.

TABLE I. Dash number and polarity. 2/

Dash number	Polarity
-03	E
-04	F
-05	J
-06	K
-07	L
-08	M

1/ Dash numbers -01 (configuration A), -02 (configuration B), -09 (configuration N) and -10 (configuration O) per figure 1 of the basic are cancelled.
2/ Inactive for new design for Naval Air Systems Command.

Custodians:
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3368-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:48Z
Check the source to verify that this is the current version before use.