
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE, TRIAXIAL HERMETIC ADAPTER, ISOLATED GROUND, SERIES III, CLASS Y, TYPE 6

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-25516.

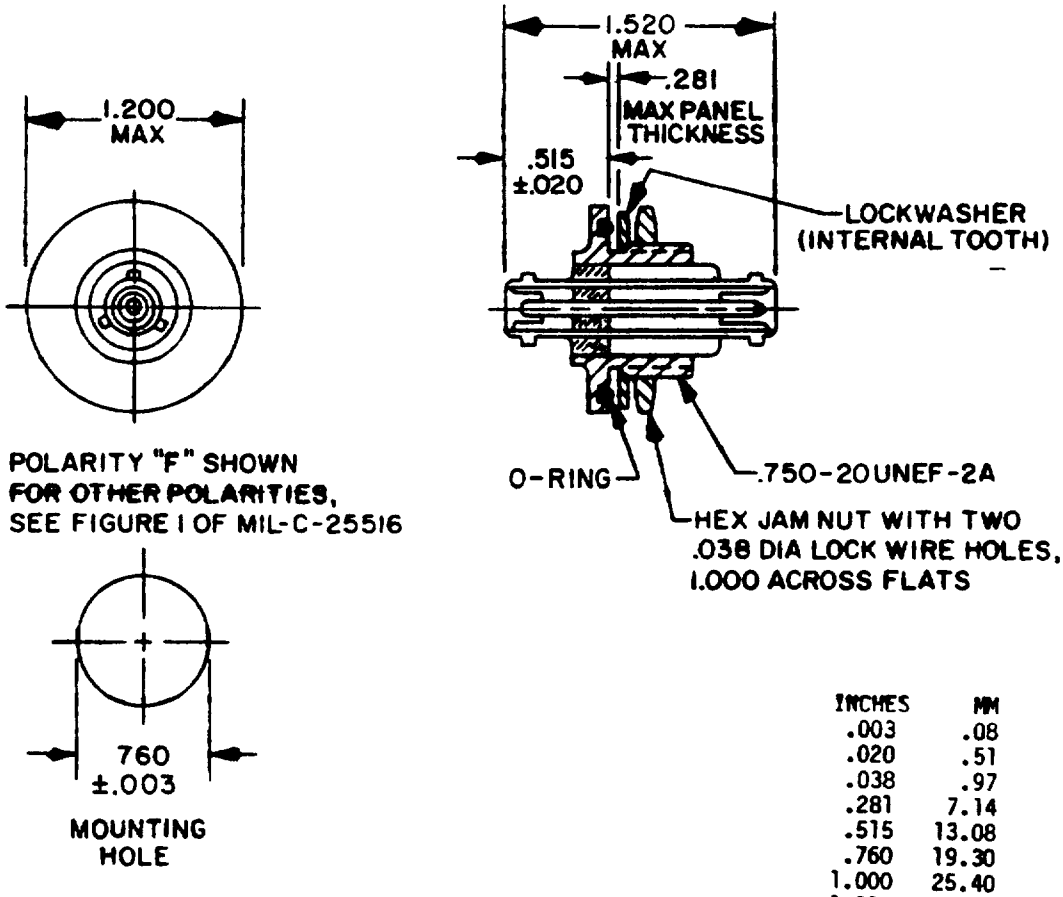

INCHES	MM
.003	.08
.020	.51
.038	.97
.281	7.14
.515	13.08
.760	19.30
1.000	25.40
1.200	30.48
1.520	38.61

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).
4. Mating dimensions shall be in accordance with MIL-C-25516.
5. Full threads to within .063 (1.60 mm) of shoulder, 1-1/2 maximum uneven threads to shoulder.
6. The maximum envelope dimensions are 1.200 and 1.520.
7. (D) Inner shell finish shall be nickel plate per MIL-C-26074, class 1, grade B.
8. Outer shell finish shall be cadmium plated per QQ-P-416, type II, class 3 over nickel plate per MIL-C-26074, class 1, grade B.

FIGURE 1. Connector, electrical adapter.

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:53Z
Check the source to verify that this is the current version before use.

FSC 5935

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Environmental and Mechanical:
Visual and mechanical inspection: Applicable.
Contact engaging and separating forces: Applicable.
Resistance to test probe damage: Applicable.
Contact retention: Applicable.
Durability Applicable.
Cable retention force: Not applicable.
Side load: Not applicable.
Hermetic sealing: Applicable.
Thermal shock: Applicable.
Shock: Applicable.
Vibration: Applicable.
High temperature: Applicable.
Fuel immersion: Applicable.
Altitude humidity cycling: Applicable.
Ozone exposure: Applicable.
Corrosion resistance: Applicable.
Sulphide immersion: Applicable.
Maintenance aging: Applicable.

Electrical:
Insulation resistance: Applicable.
Dielectric withstanding voltage: Applicable.
Contact resistance: Outer 7.5 @ 25°C, 15 @ 200°C and after conditioning.
(D) Low signal level contact resistance: Applicable, except maximum limit shall be 30 milliohms.
Shield clamp resistance: Not applicable.

Part number: M25516/22- (dash number from table I) 1/.

TABLE I. Dash number and polarity. 2/

Dash number	Polarity
-03	E
-04	F
-05	J
-06	K
-07	L
-08	M

1/ Dash numbers -01 (configuration A), -02 (configuration B), -09 (configuration N) and -10 (configuration O) per figure 1 of the basic are cancelled.
2/ Inactive for new design for Naval Air Systems Command.

Custodians:
Navy - EC
Air Force - 85

Review activities.
Navy - AS
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3368-2)

☆U.S. GOVERNMENT PRINTING OFFICE 1993 — 605-034/40040

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:53Z
Check the source to verify that this is the current version before use.