MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE
COAXIAL PRESSURIZED RECEPTACLE, TYPE 25516/24

The complete requirements for procuring connectors described herein shall consist of this document and the issue in effect of MIL-C-25516.

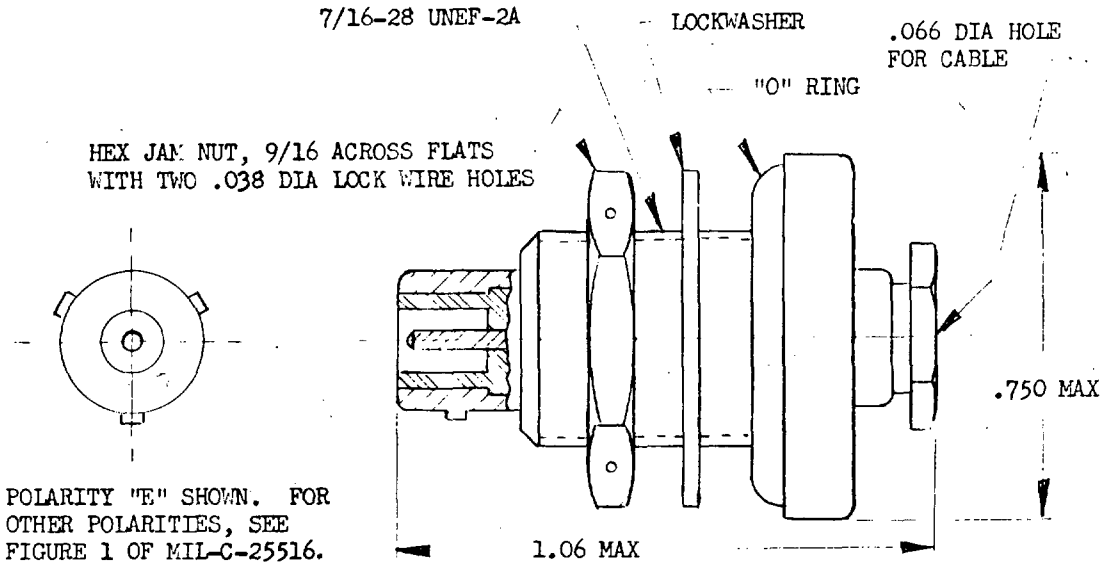


POLARITY "E" SHOWN. FOR OTHER POLARITIES, SEE FIGURE 1 OF MIL-C-25516.

| PART NUMBER | POLARITY |
|---|---|
| M25516/24-1 | A* |
| -2 | B* |
| -3 | E |
| -4 | F |
| -5 | J |
| -6 | K |
| -7 | L |
| -8 | M |
| -9 | N |
| -10 | O |

*INACTIVE FOR NEW DESIGN

Description: This is a miniature coaxial jack (receptacle) designed to fit wire MS21986-20 per MIL-W-22759 and which mates with any plug covered in MIL-C-25516 having the same polarity. This jack mounts with a gasket and nut in an 0.442-inch-diameter hole of a quarter-inch-thick panel for pressurized applications.

Specific design is limited only by above dimensions, description, and mating dimensions of MIL-C-25516. The outline of undimensioned parts are shown for reference only and are to be designed to meet operation requirements of item covered by MIL-C-25516.

Dimensions in inches unless otherwise specified.
Tolerances: Fractions ±1/64
Decimals ±0.002

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:55Z
Check the source to verify that this is the current version before use.