
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE, COAXIAL HERMETICALLY SEALED RECEPTACLE, SERIES I, CLASS H, TYPE I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-25516.

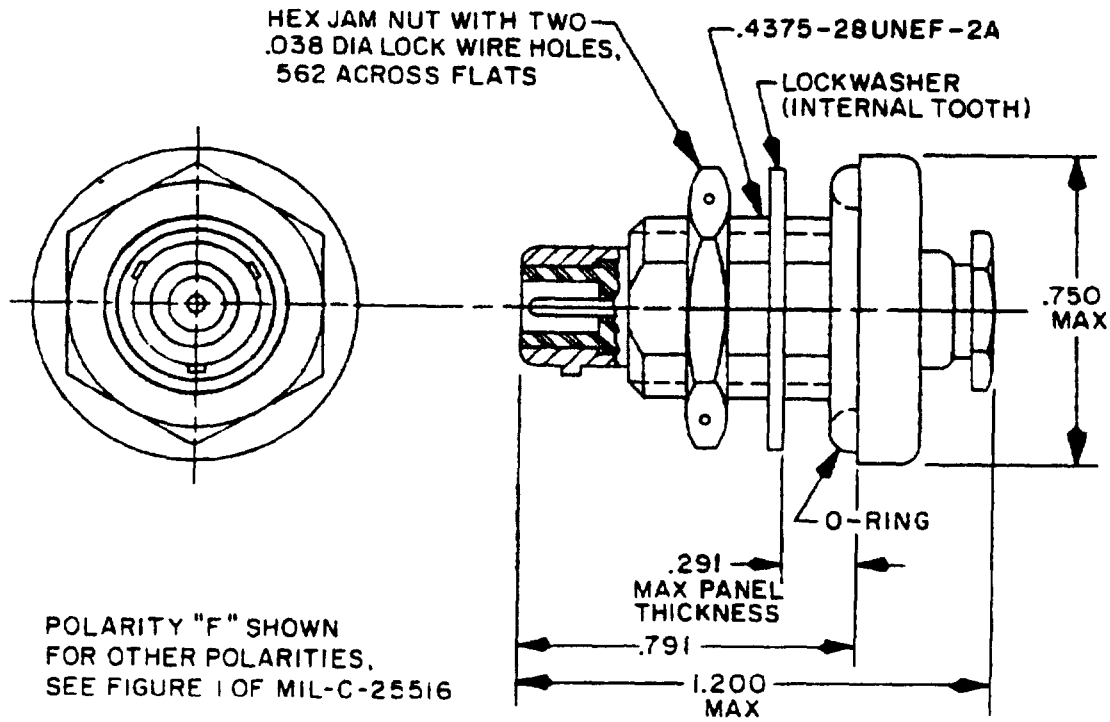

INCHES	MM
.005	13
.038	.97
291	7 39
.370	9.40
446	11.33
.562	14.27
750	19 05
.791	20 09
1 200	30 48

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances is ±.010 (.25 mm).
4. Mating dimensions shall be in accordance with MIL-C-25516.
5. Cable entry dimensions shall be suitable to accommodate the associated cable dimensions as specified in the Appendix of MIL-C-25516.
6. The maximum envelope dimensions are 1.200 and .750.
(B) 7. Shell finish shall be cadmium plated per QQ-P-416, type II, class 3 over nickel plated per MIL-C-26074, class 1, grade B.

FIGURE 1 Connector, electrical receptacle

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration. See figure 1.

Environmental and Mechanical:
Visual and mechanical inspection: Applicable.
Contact engaging and separating forces: Applicable.
Resistance to test probe damage· Applicable.
Contact retention· Applicable.
Durability Applicable.
Cable retention force Applicable.
Side load Applicable.
Hermetic sealing: Applicable.
Thermal shock: Applicable.
Shock. Applicable.
Vibration· Applicable.
High temperature: Applicable.
Fuel immersion: Applicable.
Altitude humidity cycling· Applicable.
Ozone exposure Applicable.
Corrosion resistance. Applicable.
Sulphide immersion: Applicable.
Maintenance aging: Applicable.

Electrical:
Insulation resistance: Applicable.
Dielectric withstanding voltage: Applicable.
Contact resistance: Applicable.
Low signal level contact resistance· Applicable
Shield clamp resistance· Shall not exceed 10 millohms (shielded cables only).

Part number· M25516/25- (dash number from table I) 1/.

TABLE I. Dash number and polarity. 2/

Notes	Dash number	Polarity	*Associated cable
* Complete part number consists of added digits describing typical cable See appendix The letters (E, F, G, etc.) are not part of part number	-03	E	-XX
	-04	F	-XX
	-05	J	-XX
	-06	K	-XX
	-07	L	-XX
	-08	M	-XX
	-53 3/	E	-XX
	-54 3/	F	-XX
	-55 3/	J	-XX
	-56 3/	K	-XX
	-57 3/	L	-XX
	-58 3/	M	-XX

1/ Dash numbers -01 (configuration A), -02 (configuration B), -09 (configuration N) and -10 (configuration O) per figure 1 of the basic are cancelled.
2/ Inactive for new design for Naval Air Systems Command.
3/ These connectors have double flats on the mounting portion of the connector. These connectors shall mount in holes that have 0.370 ±0.010 between the flats. Jacks that mount in double D mounting holes are indicated by part numbers -5X.

Custodians.
Navy - EC
Air Force - 85

Review activities.
Navy - AS
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

(Project 5935-3368-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:57Z
Check the source to verify that this is the current version before use.