
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE, PLUG (LANYARD RELEASE), SERIES I, CLASS G, TYPE 1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-25516.

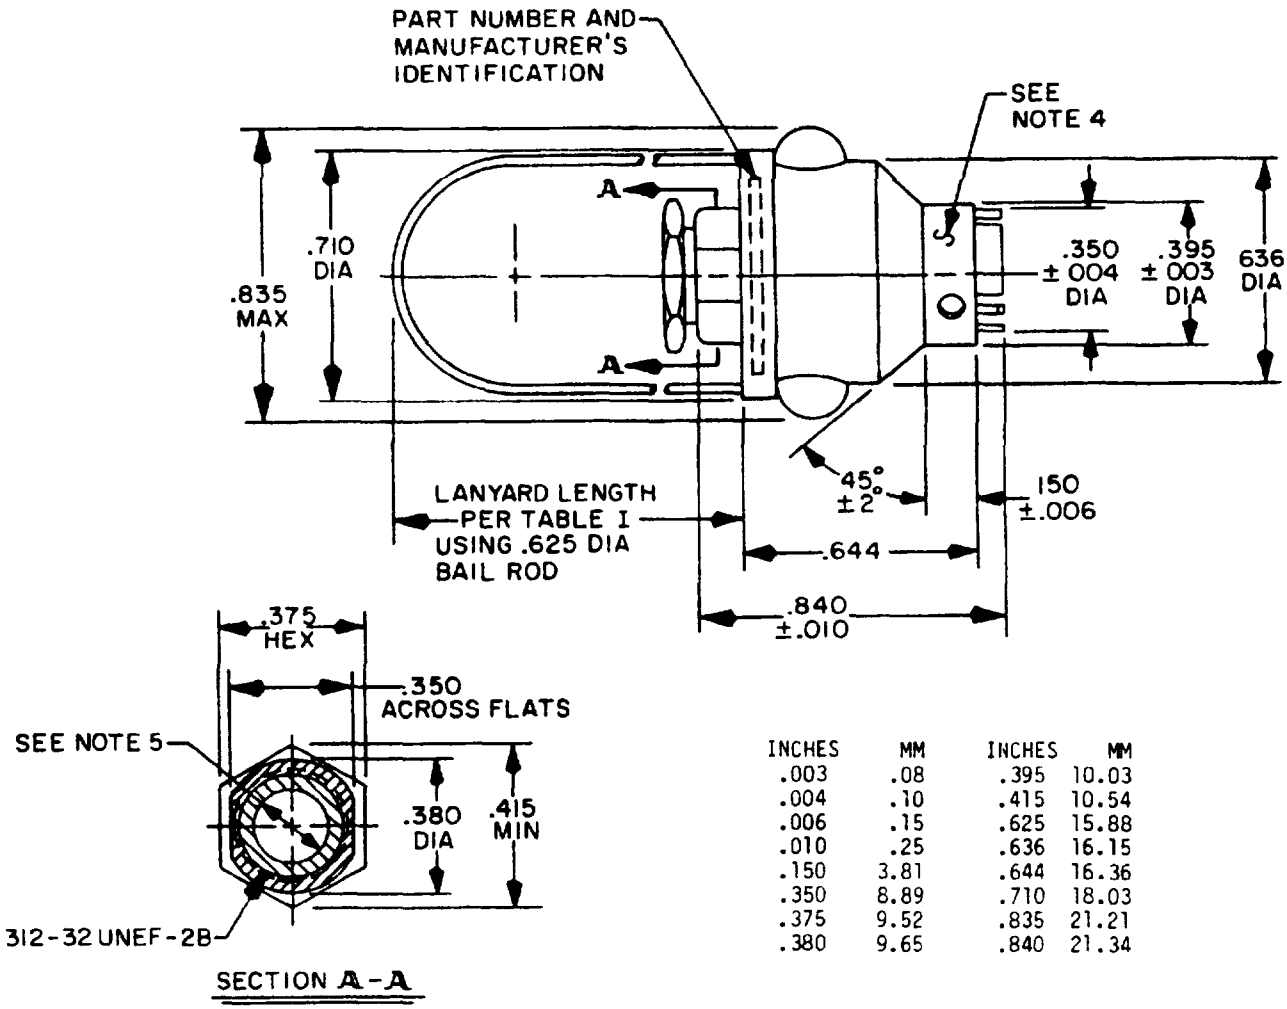

INCHES	MM	INCHES	MM
.003	.08	.395	10.03
.004	.10	.415	10.54
.006	.15	.625	15.88
.010	.25	.636	16.15
.150	3.81	.644	16.36
.350	8.89	.710	18.03
.375	9.52	.835	21.21
.380	9.65	.840	21.34

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).
4. Mating dimensions shall be in accordance with MIL-C-25516.
5. Cable entry dimensions shall be suitable to accommodate the associated cable dimensions as specified in the Appendix of MIL-C-25516.

FIGURE 1. Connector, electrical plug.

Source: https://assist.dla.mil -- Downloaded: 202610-20T06:24Z
Check the source to verify that this is the current version before use.

® denotes changes

REQUIREMENTS:

Dimensions and configuration See figure 1.

Lanyard release force. The plug connector shall uncouple from the corresponding mating connector when a disconnect force of not less than 3 pounds, nor more than 10 pounds is applied to the lanyard in an axial pull cone of 30 degrees.

Environmental and Mechanical.
Visual and mechanical inspection. Applicable.
Contact engaging and separating forces Applicable.
Resistance to test probe damage. Applicable.
Contact retention: Applicable.
Durability Applicable.
Cable retention force Applicable.
Side load. Applicable.
Hermetic sealing. Not applicable.
Thermal shock: Applicable.
Shock Applicable.
Vibration: Applicable.
High temperature Applicable.
Fuel immersion. Applicable.
Altitude humidity cycling. Applicable.
Ozone exposure. Applicable.
Corrosion resistance. Applicable.
Sulphide immersion. Applicable.
Maintenance aging. Applicable.

Electrical.
Insulation resistance: Applicable.
Dielectric withstanding voltage: Applicable.
Contact resistance: Applicable.
Low signal level contact resistance: Applicable.
Shield clamp resistance. Shall not exceed 10 milliohms (shielded cable only).

Part number: M25516/28- (dash number from table I) 1/.

(B) TABLE I. Dash number and polarity. 2/

Dash number	Polarity	Associated cable	Lanyard length +.125
03	E	XX	
04	F	XX	2.5 inches
05	J	XX	
06	K	XX	
07	L	XX	
08	M	XX	
23	E	XX	
24	F	XX	5 inches
25	J	XX	
26	K	XX	
27	L	XX	
28	M	XX	
33	E	XX	
34	F	XX	10 inches
35	J	XX	
36	K	XX	
37	L	XX	
38	M	XX	

1/ Dash numbers -01 (configuration A), -02 (configuration B), -09 (configuration N) and -10 (configuration O) per figure 1 of the basic are cancelled.
2/ Inactive for new design for Naval Air Systems Command.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T06:24Z
Check the source to verify that this is the currentversion before use.

Custodians:
Navy - EC
Air Force - 85

Review activities
Navy - SH, AS
Air Force - 99
DLA - ES

User activities
Navy - OS, ME

Preparing activity:
Air Force - 85

(Project 5935-3368-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:24Z
Check the source to verify that this is the current version before use.