
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE, HERMETICALLY SEALED RECEPTACLE, SERIES IV, CLASS G, TYPE 4

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-25516.

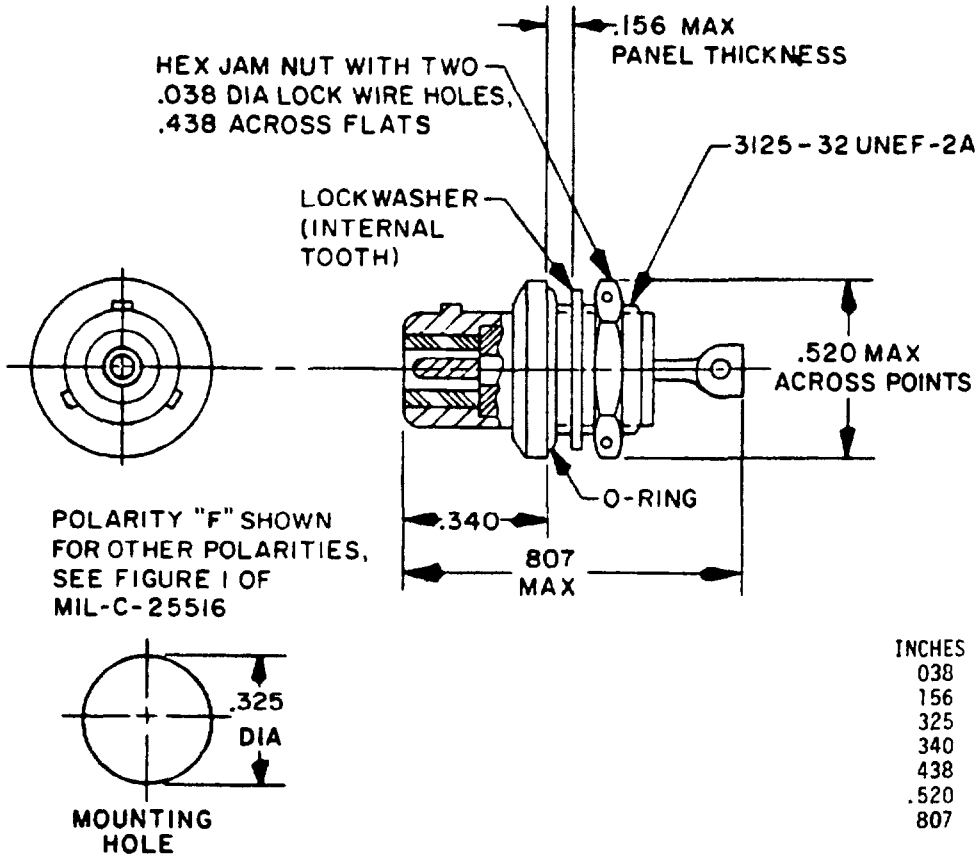

INCHES	MM
038	.97
156	3 96
325	8.26
340	8.64
438	11.13
.520	13 21
807	20 50

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010(.25 mm).
4. Mating dimensions shall be in accordance with MIL-C-25516.
5. Cable entry dimensions shall be suitable to accommodate the associated cable dimensions as specified in the Appendix of MIL-C-25516.
6. The maximum envelope dimensions are .807 and .520.
(A) 7. Shell finish shall be cadmium plated per QQ-P-416, type II, class 3 over nickel plate per MIL-C-26074, class 1, grade B.

FIGURE 1 Connector, electrical plug.

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Environmental and Mechanical
- Visual and mechanical inspection Applicable.
- Contact engaging and separating forces. Applicable.
- Resistance to test probe damage Applicable.
- Contact retention: Applicable.
- Durability: Applicable.
- Cable retention force: Not applicable.
- Side load Not applicable.
- Hermetic sealing Not applicable.
- Thermal shock Applicable.
- Shock. Applicable.
- Vibration. Applicable.
- High temperature: Not applicable.
- Fuel immersion: Applicable.
- Altitude humidity cycling Applicable.
- Ozone exposure: Applicable.
- Corrosion resistance: Applicable.
- Sulphide immersion: Applicable.
- Maintenance aging. Applicable.

Electrical:
- Insulation resistance. Applicable.
- Dielectric withstanding voltage. Applicable.
- Contact resistance: Applicable.
- Low signal level contact resistance: Not applicable.
- Shield clamp resistance: Not applicable.

Part number M25516/29- (dash number from table I) 1/.

TABLE I. Dash number and polarity. 2/

Dash number	Polarity
-03	E
-04	F
-05	J
-06	K
-07	L
-08	M

1/ Dash numbers -01 (configuration A), -02 (configuration B), -09 (configuration N) and -10 (configuration O) per figure 1 of the basic are cancelled.
2/ Inactive for new design for Naval Air Systems Command.

Custodians:
Navy - EC
Air Force - 85

Review activities.
Navy - AS
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3368-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:26Z
Check the source to verify that this is the current version before use.