
MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, MINIATURE, COAXIAL, ENVIRONMENT RESISTANT TYPE, COAXIAL PRESSURIZED RECEPTACLE, SERIES I, CLASS G, TYPE 1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring connectors described herein shall consist of this document and the issue in effect of MIL-C-25516.

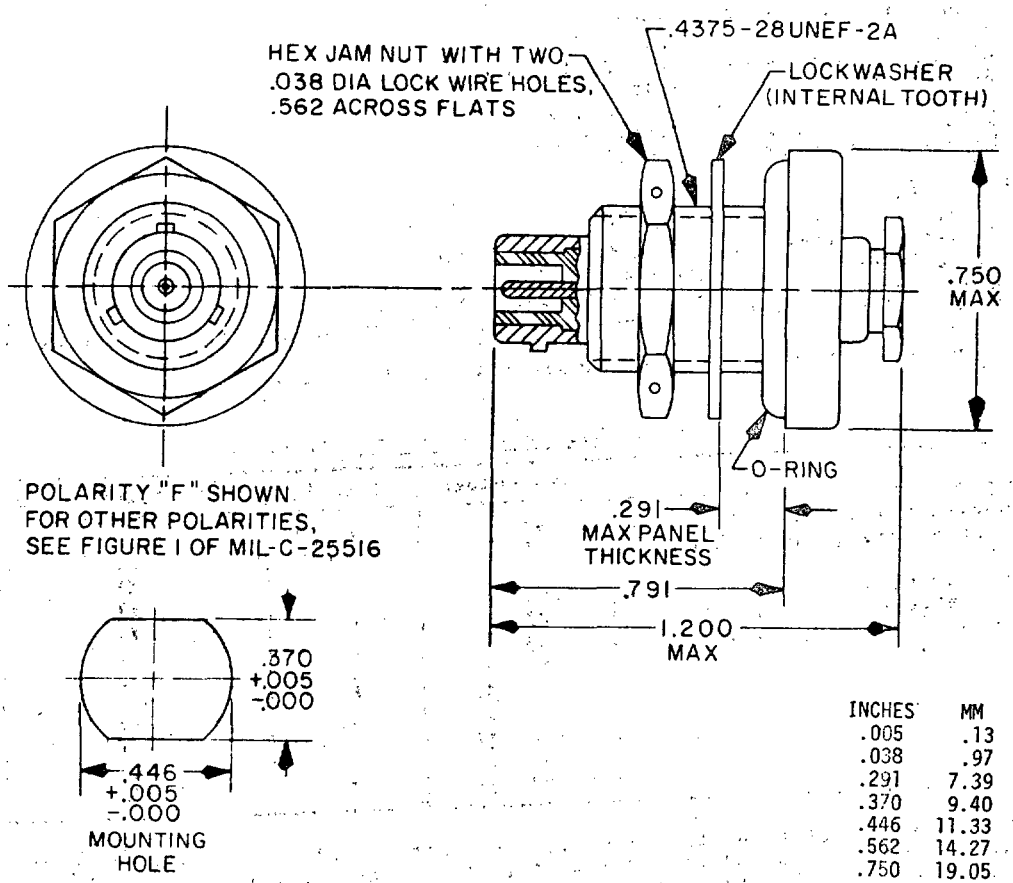


| INCHES | MM |
|---|---|
| .005 | .13 |
| .038 | .97 |
| .291 | 7.39 |
| .370 | 9.40 |
| .446 | 11.33 |
| .562 | 14.27 |
| .750 | 19.05 |
| .791 | 20.09 |
| 1.200 | 30.48 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm)
4. Mating dimensions shall be in accordance with MIL-C-25516.
5. Cable entry dimensions shall be suitable to accommodate the associated cable dimensions as specified in the Appendix of MIL-C-25516.
6. The maximum envelope dimensions are 1.200 and .750.

FIGURE 1. Connector, electrical receptacle.



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Environmental and Mechanical:
Visual and mechanical inspection: Applicable.
Contact engaging and separating forces: Applicable.
Resistance to test probe damage: Applicable.
Contact retention: Applicable.
Durability: Applicable.
Cable retention force: Applicable.
Side load: Applicable.
Hermetic sealing: Not applicable.
Thermal shock: Applicable.
Shock: Applicable.
Vibration: Applicable.
High temperature: Applicable.
Fuel immersion: Applicable.
Altitude humidity cycling: Applicable.
Ozone exposure: Applicable.
Corrosion resistance: Applicable.
Sulphide immersion: Applicable.
Maintenance aging: Applicable.

Electrical:
Insulation resistance: Applicable.
Dielectric withstanding voltage: Applicable.
Contact resistance: Applicable.
Low signal level contact resistance: Applicable.
Shield clamp resistance: Shall not exceed 10 millohms (shielded cables only).

Part number: M25516/19- (dash number from table I) 1/.

TABLE I. Dash number and polarity. 2/

| Notes | Dash number | Polarity | *Associated cable |
|---|---|---|---|
| *Complete part number consists of added digits describing typical cable See appendix The letters (E, F, G, etc.) are not part of part number | -03 | E | -XX |
| | -04 | F | -XX |
| | -05 | J | -XX |
| | -06 | K | -XX |
| | -07 | L | -XX |
| | -08 | M | -XX |
| | -53 3/ | E | -XX |
| | -54 3/ | F | -XX |
| | -55 3/ | J | -XX |
| | -56 3/ | K | -XX |
| | -57 3/ | L | -XX |
| | -58 3/ | M | -XX |

1/ Dash numbers -01 (configuration A), -02 (configuration B), -09 (configuration N) and -10 (configuration O) per figure 1 of the basic are cancelled.
2/ Inactive for new design for Naval Air Systems Command.
3/ These connectors have double flats on the mounting portion of the connector. These connectors shall mount in holes that have 0.370 ±0.010 between the flats. Jacks that mount in double D mounting holes are indicated by part numbers -5X.

NOTE: Letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:49Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3076-1)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:49Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-25516/19C, 19 May 1980

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

| SUBMITTED BY *(Printed or typed name and address — Optional)* | TELEPHONE NO. |
|---|---|
| | DATE |

**DD FORM 1 OCT 76 1426** PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:49Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Stdn
WPAFB, OH 45433

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/2467 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:49Z
Check the source to verify that this is the current version before use.