INCH-POUND

MIL-V-25513F(USAF)
9 September 1994
SUPERSEDING
MIL-V-25513E(USAF)
13 SEPTEMBER 1979

MILITARY SPECIFICATION

VALVE, CHECK, FOR 300 PSI LIQUID OXYGEN CONVERTER SYSTEMS, TYPE MH-1

This specification is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers check valves for use in multiple installations of liquid oxygen converters having working pressures of 300 pounds per square inch gage (psig).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating, Cadmium (Electrodeposited)
PPP-C-1752	Cushioning Material, Packaging, Polyethylene Foam

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should addressed to: Oklahoma City Air Logistics Center/ TICLA, Tinker AFB OK 73145-5990 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4820

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:34Z
Check the source to verify that this is the current version before use.

PPP-C-1797	Cushioning Material, Packaging, Unicellular Polyethylene Foam, Flexible

MILITARY

MIL-P-116	Preservation, Methods Of
MIL-B-121	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-B-131	Barrier Material, Watervaporproof, Greaseproof, Flexible
MIL-C-5501	Caps And Plugs, Protection, Dust And Moisture Seal
MIL-P-7105	Pipe Threads, Taper, Aeronautical National Form, Symbol ANPT, General Requirements For
MIL-S-8879	Screw Threads, Controlled Radius Root With Increased Minor Diameter, General Specification For
MIL-A-8625	Anodic Coatings, For Aluminum And Aluminum Alloys
MIL-O-27210	Oxygen, Aviator's Breathing, Liquid And Gas
MIL-T-27730	Tape, Antiseize, Polytetrafluorethylene, With Dispenser

STANDARDS

MILITARY

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of US Military Property
MIL-STD-889	Dissimilar Metals
MIL-STD-970	Standards and Specifications, Order Of Preference For The Selection Of User
MIL-STD-2073-1	DOD Material Procedures For Development And Application Of Packaging Requirements
MS33656	Fitting End, Standard Dimensions For Flared Tube Connection And Gasket Seal

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other government documents, drawings, and publications. The following other government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 202610-20T05:34Z
Check the source to verify that this is the currentversion before use.

U.S. AIR FORCE

8148650 Cleaning, Inspection And Packaging Of Breathing Oxygen Equipment

(Copies of U.S. Air Force drawings are available from the Oklahoma City Air Logistics Center/TILDO, Tinker Air Force Base, OK 73145-5990.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

American Society For Testing And Materials (ASTM)

ASTM D1974-91	Standard Practice For Methods Of Closing, Sealing, And Reinforcing Fiberboard Shipping Containers
ASTM D 5118/ D 5118M-90	Standard Practice For Fabrication Of Fiberboard Shipping Box

(Application for copies should be addressed to: ASTM, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government Standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First Article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.2.

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-970.

3.3 Materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:34Z
Check the source to verify that this is the current version before use.

3.3.1 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be encountered in storage or normal service.

3.3.1.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.3.2 Nonmetallic materials. Any nonmetallics material that is easily deteriorated or otherwise easily affected adversely by continued service use with oxygen shall not be used.

3.4 Design. The valve shall conform to the design and dimensions shown on figure 1.

3.4.1 Flow direction and marking. Oxygen shall be permitted to flow in the direction indicated by an arrow or arrows, marked or embossed on the valve exterior, and shall be checked in the opposite direction.

3.5 Construction. The valve shall operate as specified herein in any position in which it is mounted.

3.5.1 Valve body. The valve body shall be hexagonal and shall have flats to serve as wrench-gripping surfaces. The hexagonals or flats shall be 3/4 or 11/16 standard wrench flats.

3.6 Threads.

3.6.1 Screw threads. The threads for all machine screws shall conform to specification MIL-S-8879.

3.6.2 Pipe threads. Pipe threads shall conform to specification MIL-P-7105.


3.6.3 Lubricant. When necessary to prevent seizing of pipe threads, tape conforming to specification MIL-T-27730 shall be applied to male threads only. No other lubricant shall be permitted on the valve.

3.7 Finish.

3.7.1 Aluminum. Aluminum and aluminum alloy parts shall be anodized in accordance with specification MIL-A-8625.

3.7.2 Ferrous materials. Ferrous materials shall be cadmium-plated in accordance with specification QQ-P-416, type II, class 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:34Z
Check the source to verify that this is the current version before use.

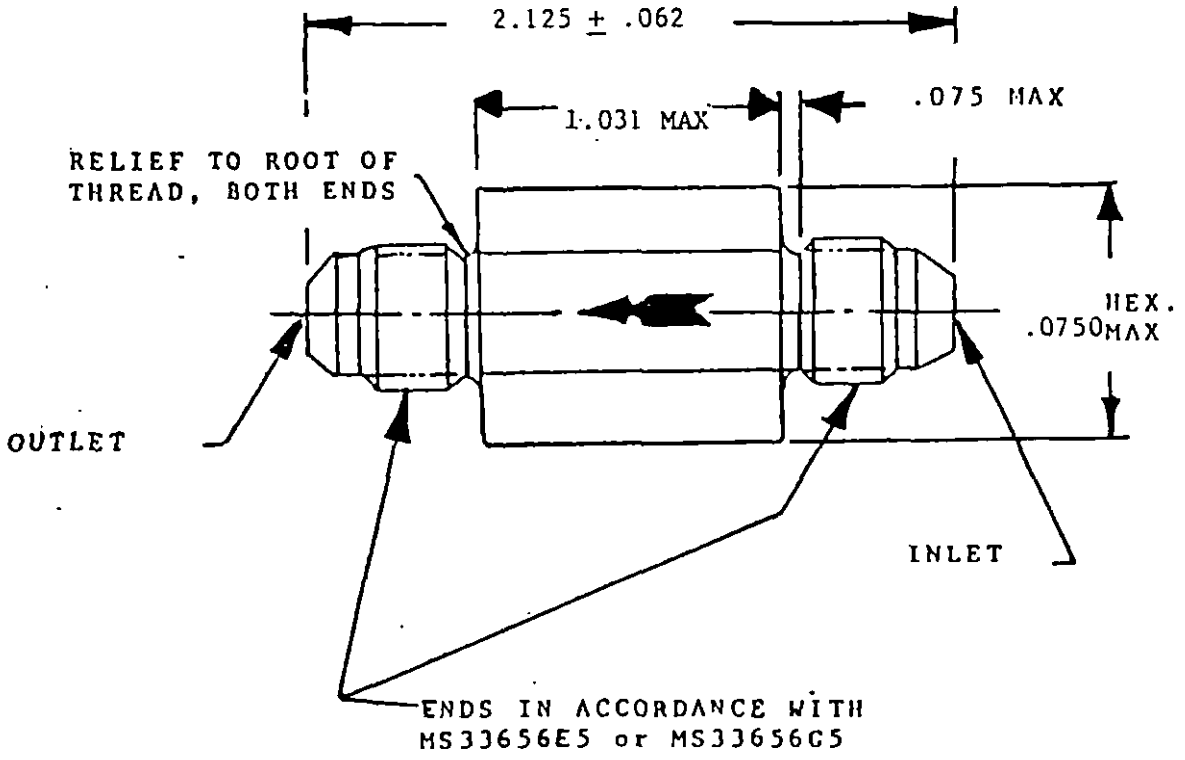

NOTE 1 - OPPOSITE FITTING ENDS SHALL BE CONCENTRIC WITHIN .032 FULL INDICATOR READING.

NOTE 2 - ALL DIMENSIONS IN INCHES-TOLERANCE: FRACTIONS ± .031.

FIGURE 1. Converter check valve envelope.

Source: https://assist.dla.mil -- Downloaded: 202640-20T05:34Z
Check the source to verify that this is the current version before use.

3.8 Conditions. Valves shall be thoroughly dry and shall be free from oil or other foreign matter.

3.9 Performance.

3.9.1 Body leakage. The valve shall not leak when any pressure from zero to 450 psi is applied. (See 4.6.1.)

3.9.2 Flow check leakage. The checks in the direction in which the flow is checked shall be capable of withstanding a pressure of 10 to 450 psi without leakage in excess of one cubic centimeter per minute. (See 4.6.2.)

3.9.3 Valve leakage below opening pressure. The leakage through the valve when a pressure of 40 ± 2 psi is applied to the inlet port shall not exceed 0.03 liter per minute. (See 4.6.3.)

3.9.4 Opening pressure. The valve shall open at 50 psi and shall allow a flow of at least 20 liters per minute at a maximum pressure of 60 psig. (See 4.6.4.)

3.9.5 Chattering. The valve shall not chatter when the inlet pressure is gradually increased (not less than ten seconds) from 0 to 100 psig. (See 4.6 5.)

3.9.6 Pressure drop. The pressure drop through the valve shall not exceed 20 psig in addition to the opening pressure when a pressure of 300 psi is applied at the inlet of the valve and a flow of 250 liters of free gas per minute is maintained through the valve. (See 4.6.7.)

3.9.7 High and low temperature operations. The valve shall be capable of operating without failure or damage to any of its parts at temperatures from - 54° C to + 127° C (-65° F to + 260° F). (See 4.6.8 and 4.6.9.)

3.9.8 Torque. All pipe threads shall be capable of withstanding a maximum torque of 300 pound-inches without damage. All straight threads shall be capable of withstanding a maximum torque of 100 pound-inches without damage. (See 4.6.10.)

3.9.9 Vibration. The valves shall be capable of operating while being vibrated at a double amplitude (total displacement) of 0.018 to 0.020 inch at a frequency cycled from 300 to 3000 cycles per minute, for a period of six hours. (See 4.6.11.)

3.9.10 Low temperature exposure. The valve shall show no signs of failure of material or finish when exposed to temperature as low as -80° F. (See 4.6.12.)

3.9.11 Overpressure. The valve shall show no sign of structural failure or damage when a pressure of 600 psi is applied to the inlet or outlet of the valve for not less than one minute. (See 4.6.13.)

Source: https://assist.dla.mil -- Downloaded: 202610-20T05:34Z
Check the source to verify that this is the currentversion before use.

3.9.12 Excess flow. The valve shall show no signs of damage or malfunction of any parts when a pressure of 200 psi is applied to the inlet for not less than three minutes and the outlet is left open to the atmosphere. (See 4.6.14.)

3.9.13 Endurance check. The valve shall be cycled not less than 500 times while simulating actual operating conditions for the unit. (See 4.6.15.)

3.10 Weight. The weight of the valve shall not exceed 0.07 pound.

3.11 Marking. Direction of flow shall be marked as specified in 3.4.1.

3.12 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part number shall be governed by the drawing number requirements of MIL-STD-100.

3.13 Identification of product. The valves shall be marked in accordance with MIL-STD-130. The marking shall include the following:

VALVE, CHECK, 300 PSI, TYPE MH-1
MIL-V-25513D
Manufacturer's Identification.....
Contract or Order No.....

3.14 Workmanship. The valves shall be constructed in accordance with good commercial practice. They shall be free from any defect that might affect appearance or functionality. The valves shall be clean, dry, and free of oil, grease or other foreign matter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the

Source: https://assist.dla.mil -- Downloaded: 20261O-20T05:34Z
Check the source to verify that this is the current version before use.

Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of tests. The inspection and testing of valves shall be classified as follows:

a. First article testing (4.4)

b. Quality conformance inspection (4.3).

4.3 Quality conformance inspection. Acceptance tests shall consist of:

a. Individual tests

b. Sampling tests.

4.3.1 Individual tests. Each valve submitted for acceptance under contract shall be subjected to the following tests as described under 4.6:

a. Body leakage (4.6.1)

b. Flow check leakage (4.6.2)

c. Valve leakage below opening pressure (4.6.3)

d. Opening pressure (4.6.4)

e. Chattering (4.6.5).

4.3.2 Sampling tests.

4.3.2.1 Lot. A lot shall consist of valves manufactured under essentially the same conditions and submitted for inspection at the same time.

4.3.2.1.1 Sampling plan A. Two valves shall be selected at random from each lot of 200 valves, or fraction thereof, on the order and subjected to the tests listed below and described under 4.6:

a. Examination of product (4.6.6)

b. Pressure drop (4.6.7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T05:34Z
Check the source to verify that this is the current version before use.

c. High temperature operation (4.6.8)

d. Low temperature operation (4.6.9)

e. Torque (4.6.10).

4.3.2.1.2 Sampling plan B. Two valves shall be selected at random from each lot of 5,000, or fraction thereof, and subjected to the following tests, as described under 4.6:

a. Vibration (4.6.11)

b. Low temperature exposure (4.6.12)

c. Overpressure (4.6.13)

d. Excess flow (4.6.14)

e. Endurance check (4.6.15).

4.3.2.1.3 Rejection and retest. When one or more items from a lot fail to meet the specification, acceptance of all items in the log will be withheld until the extent and cause of failure are determined. After corrections have been made, all necessary tests shall be repeated.

4.3.2.1.4 Individual test may continue. For production reasons, individual tests may be continued pending the investigation of a sampling test failure. Final acceptance of the entire lot shall not be made, however, until it is determined that the lot meets all the requirements of the of the specification.

4.3.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.4. First article testing.

4.4.1 First article testing sample tested by the contractor. The contractor shall subject three valves to the first article tests specified in 4.4.4.

4.4.2 First article test report. When required in 6.2, the contractor shall prepare first article test report in accordance with 6.3.

4.4.3 First article test sample for the Government procuring activity. Along with the first article test report, the contractor shall submit one sample to the Government procuring activity specified in 6.3.

Source: https://assist.dla.mil -- Downloaded: 202610-20T05:34Z
Check the source to verify that this is the current version before use.

4.4.4 First article tests. First article tests shall consist of all tests described under 4.6.

4.5 Test conditions.

4.5.1 Atmospheric conditions. Unless otherwise specified, all test required by this specification shall be conducted at an atmospheric pressure of 28 to 32 inches of mercury and at a temperature of 25 $\pm$ 10° C (77$\pm$18° F) and a relative humidity of not more than 80 percent. Where tests are made with atmospheric pressure or temperature different from the above values, proper allowance shall be made for the changes in instrument readings.

4.5.2 Vibration. Where a vibration stand is specified in the test procedure, it shall vibrate a cycled frequency between 300 and 3000 cycles per minute, at a double amplitude (total displacement) of 0.018 to 0.020 inch.

4.5.3 Test media. Oxygen conforming to specification MIL-O-27210, type I, shall be used as the high pressure gas for the tests specified herein.

4.6 Test methods.

4.6.1 Body leakage. The inlet end of the valve shall be connected to a source of pressure and the outlet capped. Pressure shall be from zero to 450 psi. The valve shall be immersed in water or alcohol and examined for leakage through the assembly threads, while the pressure is increased slowly from zero to 450 psi. Evidence of leakage shall be cause for rejection. (See 3.9.1.)

4.6.2 Flow check leakage. The outlet end of the valve shall be connected to a pressure source which can be varied from zero to 450 psi, and the inlet end shall be connected to a suitable flow-measuring instrument. The valve shall be tested for leakage while the pressure is increased slowly from zero to 450 psi. Any leakage in excess of one cubic centimeter per minute shall be cause for rejection. (See for 3.9.2.)

4.6.3 Valve leakage below opening pressure. A pressure of 40 psig, plus or minus 2 psig, shall be applied to the valve through the inlet port. The leakage through the valve shall not exceed 0.03 liter per minute. (See 3.9.3.)

4.6.4 Opening pressure. Pressure shall be gradually increased from zero psig to the opening pressure which shall be 50 psig, plus or minus 5 psig. At a maximum pressure of 60 psig, the valve shall allow a flow of at least 20 liters per minute. A flow of less than 20 liters per minute shall be cause for rejection. (See 3.9.4.)

4.6.5 Chattering. The inlet pressure of the valve shall be gradually increased from zero to 100 psig in not less than ten seconds with no evidence of chattering. There shall be no flow restrictions at the outlet during this test. (See 3.9.5.)

Source: https://assist.dla.mil -- Downloaded: 202610-20T05:34Z
Check the source to verify that this is the current version before use.

4.6.6 Examination of product. Samples selected shall be examined to determine conformance to this specification with respect to materials, workmanship, dimensions and markings.

4.6.7 Pressure drop. The pressure drop through the valves shall be measured when a pressure of 300 psig is applied at the inlet of the valve and a flow of 250 liters of free gas per minute is maintained through the valves. A pressure drop of more than 20 psig in addition to the opening pressure shall be cause for rejection. (See 3.9.6.)

4.6.8 High temperature operation. With a pressure of 450 psi applied to the outlet, the valves shall be subjected to a temperature of not less than 127° C (260° F) for a period of seven hours. During this test, the check valves shall be subjected to the flow check leakage test at least six times. Any evidence of failure or damage shall be cause for rejection. (See 3.9.7.)

4.6.9 Low temperature operation. With a pressure of 450 psi applied to the outlet, the valves shall be subjected to a temperature of minus 54 ±2° C (minus 65 ±4° F) for a period of seven hours. During this period, the samples shall be subjected tot the flow check leakage test at least six times. Any evidence of failure or damage shall be cause for rejection. (See 3.9.7.)

4.6.10 Torque. The pipe threads shall be examined for evidence of failure after being subjected to a maximum of at least 300 pound-inches torque. The straight threads shall be examined for evidence of damage after being subjected to a maximum of 200 pound-inches torque. Any evidence of damage shall be cause for rejection. (See 3.9.8.)

4.6.11 Vibration. The valves shall be vibrated for a period of six hours while a pressure of 450 psi is applied to the inlet end with the outlet capped. During the vibration period, the samples shall be subjected to the flow check leakage test at least six times with the inlet pressure disconnected. Any evidence of damage or leakage shall be cause for rejection. (See 3.9.9.)

4.6.12 Low temperature exposure. The samples shall be exposed to a temperature of minus 65 ± 3° C (minus 85 ±5° F) for a period of 48 hours. At the end of the 48 hours, the samples shall be returned to room temperature and subjected to the individual tests. (See 3.9.10.)

4.6.13 Overpressure. A pressure of 600 psi shall be applied to the inlet for not less than one minute with the outlet capped. The pressure shall then be applied to the outlet with the inlet open. There shall be no sign of structural failure or damage to the valve components. Upon completion of the test, the valve shall be subjected to and meet the individual tests. (See 3.9.11.)

4.6.14 Excess flow. A pressure of 200 psi shall be applied to the inlet for not less than three minutes with the outlet open to the atmosphere. There shall be no blockage of flow or damage to the valve components. Upon completion of the test, the valve shall be subjected to and meet the individual tests. (See 3.9.12.)

Source: https://assist.dla.mil -- Downloaded: 202610-20T05:34Z
Check the source to verify that this is the current version before use.

4.6.15 Endurance check. The valve shall be located in a pressure line with a pressure of 300 psi applied in the direction of flow. An additional valve or a means of relieving the downstream side shall be depleted 500 times, of sufficient amounts to actuate the check valve. Chattering of the valve during the test shall be cause for rejection. Upon satisfactory completion of the test, the valve shall be subjected to and meet the individual tests specified herein. (See 3.9.13.)

4.6.16 Preservation and packaging. Unless otherwise specified in the purchase order or contract, the supplier is responsible for the performance of all inspections required as listed in table III, MIL-P-116, for the method of preservation being accomplished.

4.7 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification shown in section 5. The inspection of marking for shipment and storage shall be in accordance with MIL-STD-129. The inspection of commercial packaging shall be as specified in the contract (see 6.2).

5. PACKAGING

5.1 Preservation. Preservation shall be level "A," as specified (see 6.2). Packaging shall be in accordance with MIL-STD-2073-1.

5.1.1 Level A.

5.1.1.1 Cleaning. Valve shall be cleaned in accordance with U. S. Air Force Drawing 8148650.

5.1.1.2 Drying. Immediately after cleaning, the valve shall be dried in accordance with U.S. Air Force Drawing 8148650.

5.1.1.3 Preservative application. Preservative shall not be used.

5.1.1.4 Unit Pack. Valve shall be packaged in Quantity Unit Pack (QUP) of one each. Each item will be provided a sub-method IA-8 in accordance with MIL-P-116 and U. S. Air Force Drawing 8148650. Unit container requirements shall conform to MIL-B-131, barrier material. Unit container shall be large enough to allow for application of sufficient wrap MIL-B-121 material and cushioning PPP-C-1797 material, between the item and unit container to provide sufficient density and thickness to protect the unit container from punctures.

Source: https://assist.dla.mil -- Downloaded: 20260-20T05:34Z
Check the source to verify that this is the current version before use.

5.1.1.5 Intermediate Pack. Intermediate and/or shipping container requirements shall conform to ASTM D 5118/D 5118M-90, paragraph 6.2.1.2, Regular Slotted (RSC-0201), specified by the contracting activity. Cushioning material shall be of sufficient density and thickness to ensure shock transmission does not exceed peak value which has been established for this item.

5.2 Packing. Packing shall be level "A," "B," or "C" as specified (see 6.2).

5.2.1 Level A. Fiberboard container does not meet level "A" requirements.

5.2.3 Level B. Item will be preserved as specified in 5.1 and shall be packed in exterior containers conforming to ASTM D 5118/D 5118M, paragraph 6.4.1, Type Weather-resistant unless otherwise specified by the contracting activity. Exterior container shall be uniform shape, size, and minimum tare and cube, consistent with the protection required. Closure shall be accordance with appropriate ASTM D 1974-91, paragraph 7.1.1, Sealing Method A Procedures, or as specified by the contracting activity.

5.2.4 Level C. Item will be packed in such a manner that will afford adequate protection against physical/mechanical damage during direct domestic shipment from the supply source to the first receiving activity. These pack shall conform to MIL-STD-2073-1.

5.3 Marking. Unit, intermediate, and exterior containers shall be marked in accordance with special markings required by the contracting activity, U.S. Air Force Drawing 8148650, and MIL-STD-129.

6. NOTES

(This section contains information of general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The check valves covered by the specification are intended for use with multiple installation of 300 pounds per square inch gage liquid oxygen converters used in aircraft oxygen breathing systems.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of specification

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1)

c. First article data requirements (see 6.3)

Source: https://assist.dla.mil -- Downloaded: 20260-20T05:34Z
Check the source to verify that this is the current version before use.

d. Level of packaging and packing required (see 5.1. and 5.2).

6.3 First article. When the first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, or a standard production item from the contractor's current inventory (see 3.1); and the number of items to be tested as specified in 4.2.

6.4 Data requirements. Data generated by this document is not deliverable unless specified on the Contract Data requirements List (DD Form 1423) referencing the appropriate data item description of the DOD Authorized Data List (TD-3). Td data produced by this specification is ID-T-3718A, paragraph 1.b. (Reference paragraph 3.16.)

6.5 Subject term (key word) listing. Recommended keywords are:

Breathing oxygen
Converter
Lox

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 71

Review Activity:
DCSC- VS
DLA- CS
Air Force - 82

Project Number:
4820-0657

Source: https://assist.dla.mil -- Downloaded: 202610-20T05:34Z
Check the source to verify that this is the current version before use.