[INCH-POUND]
A-A-228A
May 3, 1995
SUPERSEDING
A-A-228
March 12, 1980

COMMERCIAL ITEM DESCRIPTION

TWINE, FIBROUS, JUTE

The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification T-T-911, for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers jute twine intended for general wrapping purposes.

2. CLASSIFICATION

2.1 Classification. The twine shall be of the size and finish, as specified (see 7.2).

3. SALIENT CHARACTERISTICS

3.1 Material. The twine shall be made from jute, in natural or polished finish as specified, and shall have the physical properties in Table I and II.

Table I Natural finish twine

Size No.	Ply (Min.)	Length Per Pound (Minimum Feet)	Breaking Strength (Minimum Pounds)
0	1	1960 (598m)	17 (7.7kg)
1	2	1450 (442m)	20 (9.0kg)
2	2	950 (290m)	32 (14.5kg)
3	2	800 (244m)	43 (19.5kg)
4	2	640 (195m)	54 (24.5kg)
7A	2	130 (40m)	260 (118.0kg)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 4020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

Table II Polished finish twine

Size No.	Ply (Min.)	Length Per Pound (Minimum Feet)	Breaking Strength (Minimum Pounds)
4	2	590 (180m)	75 (40.0kg)
6	2	240 (73m)	125 (56.6kg)

3.2 Put-up. The twine shall be put-up on a nominal weight (± 5 percent) basis as either 1/2 pound, 1 pound, 5 pound (0.226kg, 0.453kg, 2.265kg) balls or coreless tubes, as specified. Each ball or coreless tube of twine shall be continuous throughout with no loose ends. The twine shall be wound so that each turn and layer are free from entanglement and shall unwind from the inside without collapsing. Each ball or coreless tube shall not contain more than one knot per 1/2 pound (0.226kg) of twine.

3.3 Color. The twine shall be furnished in natural color.

3.4 Staining. The twine shall be nonstaining (commercially called "stainless") when used.

3.5 Workmanship. The twine shall have no defect that affects appearance or serviceability.

3.6 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are for information purposes only.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3.8 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS


5.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part Identification Number (PIN). Twine conforming to this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the CID number, size, and finish. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

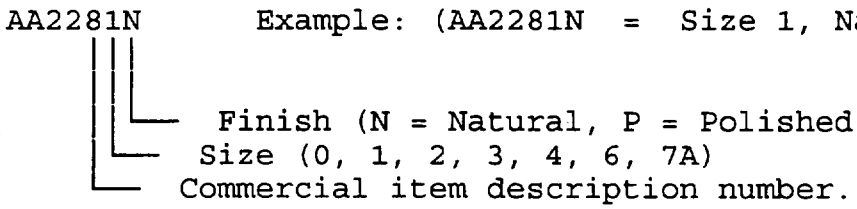

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Size and finish.
c. The preservation, packing, and marking desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSNs): The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Size	Finish	Part number
4020-00-782-5572	0	Natural	AA228-0-N
4020-00-282-6411	1	Natural	AA228-1-N
4020-00-241-8875	2	Natural	AA228-2-N
4020-00-782-5571	3	Natural	AA228-3-N
4020-00-241-8880	4	Natural	AA228-4-N
4020-00-241-8899	4	Polished	AA228-4-P
4020-00-242-4074	6	Polished	AA228-6-P
4020-00-257-5396	7A	Natural	AA228-7A-N

MILITARY INTERESTS:

Review Activities:

DLA - IS
Army - MD

PREPARING ACTIVITY:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.