A-A-2567
March 25, 1988

COMMERCIAL ITEM DESCRIPTION

BAR, DIGGING AND TAMPING

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GGG-B-101, Type VI, Class 1 and Class 2, Size 1.

This commercial item description covers digging and tamping bars.

SALIENT CHARACTERISTICS

Material. The material used in the manufacture of Type VI bars shall be carbon steel AISI C1060 grade or higher grade alloy tool steel. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the specified tests. All forgings shall be of uniform quality, free from defects and imperfections that may affect their serviceability or durability. Special quality, fine grain, hot rolled or cold finished carbon steel may also be used.

Design. The bars, otherwise meeting the requirements of this specification, may be the manufacturer's standard design.

Finish. The bars shall be free from burrs, roughness and excessive oxide scale. The body of the bars shall be either lacquered, enameled, painted, or have an oil-coated natural finish. The work ends of Type VI bars shall have a satin finish, and shall be oil or phosphate coated, lacquered or painted.

Type VI, digging and tamping. Digging and tamping bars at one end shall be provided with a tamping head suitable for tamping operation, and the opposite end formed to a bit. The bit end shall be smoothly finished and uniformly tapered, having a cutting edge ground to a double-beveled edge. The tamping head shall have a flat surface for tamping, and the opposite side of the tamping head shall be either flat or beveled.

Hardness. The chisel end of the bar shall show a hardness reading of not less than 42 nor more than 52 on the Rockwell C scale, or a hardness reading of not less than 390 nor more than 512 on the Brinell scale.

Class 1, posthole. The sides of the bit shall be either parallel or tapered toward the shank. Class 1 bars shall conform to table I, and be similar to figure 1.

Table I. Type VI, class 1, digging and tamping bar, posthole.

Size Number	Dimensions												Test load minimum
	A		B		C		D	E	F	G	H	I	
	Min	Max	Min	Max	Min	Max	Min	Min	+1/32	Min	Max	Min	
	Inches		Inches		Inches		Inch	Inches	Inch	Inch	Inch	Inch	Pounds
1	68-1/2	73	2-1/8	2-5/8	2-1/4	3	1/8	8-1/2	1	1/4	1/4	3/4	150

Size Number	National Stock Number
1	5120-00-237-8256

FSC 5120

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

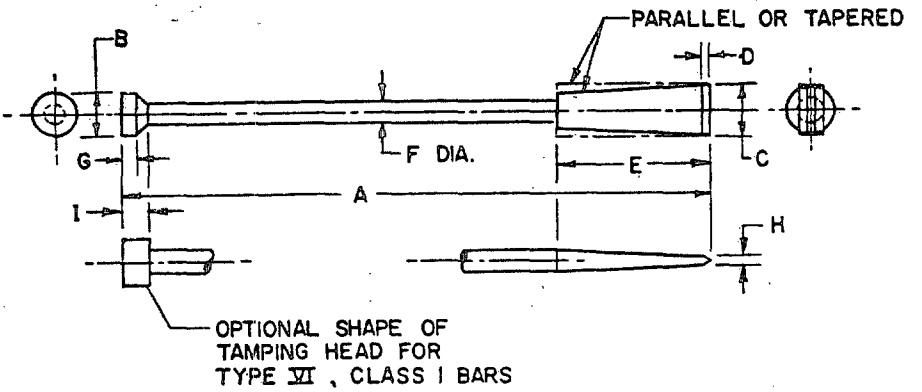


FIGURE 1. Type VI, class 1, earth digging and tamping bar, posthole.

Class 2, telegraph. Class 2 bars shall conform to table II, and be similar to figure 2. Overall length shall be 33-1/2 inches; plus or minus 1 inch. 1 inch hexagonal or octagonal minimum. One end - 0.06 x 45 degree chamfer; other end chisel as per description.

Table II. Type VI, class 2, digging and tamping bar, telegraph.

Size Number	Dimensions								Test load minimum
	B		C	D		G	H		
	Min	Max	Min	Min	Max	Min	Max		
	Inches		Inch	Inches		Inches	Inch		Pounds
1	2-1/16	2-1/2	3/16	1	1-5/32	3-7/8	3/16		300

Size Number	National Stock Number
1	5120-00-892-4713

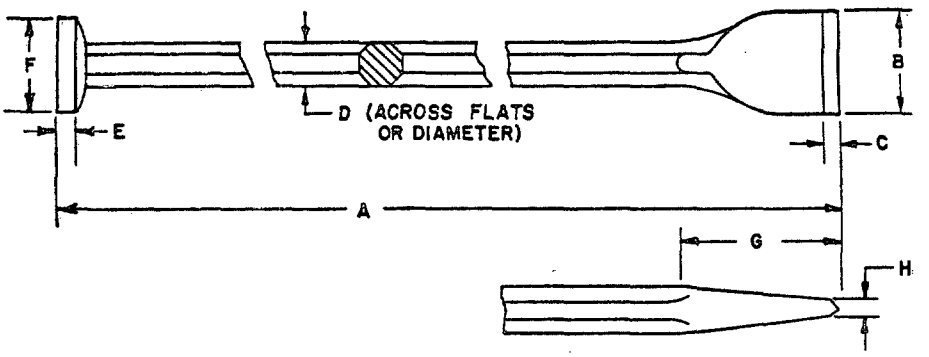


FIGURE 2. Type VI, class 2, digging and tamping bar, telegraph.

Identification marking. Each digging and tamping bar shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, part number, and country of origin.

Workmanship. All bars shall be free from imperfections which may affect their safety, appearance, serviceability, or durability.

QUALITY ASSURANCE PROVISIONS

Sampling for inspection. Sampling shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise specified herein. The lot size shall consist of all bars offered for acceptance at one time. The sample unit is one digging and tamping bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Visual inspection. Each digging and tamping bar from the sample lot shall be examined for workmanship and marking requirements. The inspection level shall be I with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Dimensional inspection. Each digging and tamping bar from the sample lot shall be examined for dimensional requirements. The inspection level shall be S-4 with an acceptable quality level (AQL) of 2.5 defects per hundred units.

Testing of end item. The inspection level shall be S-3 with an acceptable quality level (AQL) of 4.0 percent defective.

Hardness test. Hardness test shall be in accordance with ASTM E18 or ASTM E10. The impressions of Type VI, class 2 bars shall be taken 1/2 inch from the end tested. Impressions taken on Type VI, class 1 bars shall be not less than 1 inch from the cutting end. The manufacturer shall certify that both the cutting edge end and the taper end have been similarly hardened.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.

The issue of referenced documents in effect on date of invitation for bid or request for proposal shall be used to determine compliance with the stated requirements.

ASTM standards are available from American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Military standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS:

Military Coordinating Activity
Army - GL

Custodians
Army - GL
Air Force - 99

Review Activities
Air Force - 84

PREPARING ACTIVITY:

GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.