INCH-POUND
A-A-2846
August 1, 1994

COMMERCIAL ITEM DESCRIPTION

RAKE, HAND (Garden and Lawn)

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Federal Specification GGG-R-96 which has been canceled.

1. SCOPE

1.1 Scope. This commercial item description covers garden rakes suitable for raking and smoothing soil, and lawn rakes suitable for raking grass clippings and leaves from lawns.

2. CLASSIFICATION

2.1 Classification. The rakes shall be of the following types, classes, composition, and sizes as specified (see ‘7.2) :

Type I - Garden Rake
- Class A - Bow
- Class B - Level head
- Class C - Striking Edge Aluminum head

Type II - Lawn Rake
- Class A - Radial head
  - Composition P - Plastic tines
  - Composition S - Steel tines
- Class B - Semiradial head
  - Size 1 - 18 inch head width
  - Size 2 - 22 inch head width
- Class C - Double-Rib Aluminum head

3. SALIENT CHARACTERISTICS

3.1 Handles. The rake may have a handle manufactured from a suitable hardwood, fiberglass, or tubular metal. Wood handles shall include a protective finish such as lacquer or polyurethane. Tubular metal handles shall be furnished with a cushion-type handgrip 4 inches (10.2 cm) minimum in length and affixed to the end of the handle.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any data which may improve this documental should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

Source: https://assistdla.mil - Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.2 Type I, Garden Rake. The type I garden rake shall be designed for raking and smoothing soil.

3.2.1 Class A, Bow. The head and bow shall be forged in one piece from steel. The bow shall be of circular cross-section. The head design shall be similar to figure 1. The bow shall not interfere with using the top of the-head for leveling soil. The head shall contain 14 to 16 teeth and be a minimum of 13-1/2 inches (34.3 cm) in width. The head shall have a minimum depth of 2-3/4 inches (7.0 cm) . The rake handle shall be a minimum of 59 inches (1.49 m in length.

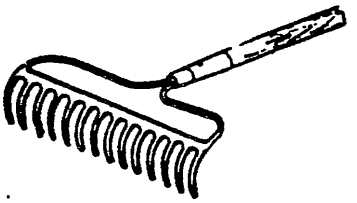


Figure 1 - Type I, Class A, Bow

3.2.2 Class B, Level head. The head and shank shall be forged one piece from steel. The teeth shall be as shown in figure 2. The rake shall have a single central shank which shall be forced into the handle and reinforced with a ferrule. The shank shall be so arranged as not to interfere with the use of the top of the head for leveling soil. The head shall contain 14 to 16 teeth and be a minimum of 14 inches (35.6 cm) in width. The head shall have a minimum depth of 3 inches (7.6 cm) . The rake handle shall be a minimum of 65 inches (1.65 m) in length.




Figure 2 - Type I, Class B, Level Head

3.2.3 Class C, Striking edge aluminum head. The head shall have a single rib and be formed from extruded aluminum. The teeth shall be as shown in figure 3. The handle shall be powder coated and slotted to fit over the back rib of the head using one self-locking bolt and nut. Two solid aluminum braces shall encompass the handle and connect to the head with self-locking bolts and nuts. The head shall be available in the following sizes as specified: 24 inch (61 cm), 30 inch (76 cm), 36 inch (91 cm), 42 inch (107 cm), 48 inch (122 cm) . The head shall be constructed with one rounded tip tooth per each inch of head size. The head shall have a minimum depth of 4 inches (10.2 cm) . The rake shall have a 66 inch (1.68 m) handle with a 5 inch (12.7 cm) vinyl grip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

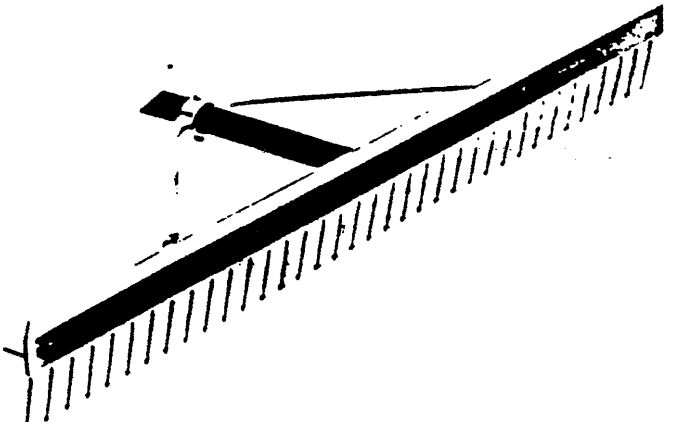



Figure 3 - Type I, Class C, Striking Edge Aluminum Head

3.3 Type II, Lawn Rake. Lawn rakes shall be suitable for raking grass clippings, leaves, twigs, and litter from lawns without injury to the grass or roots.

The type II, composition S (steel tines) rakes shall have flexible heads consisting of strips of flat spring steel with the bent end forming the head and tines, a handle, and a ferrule or socket suitable for securing the head to the handle. The rake head may consist of a plastic resin body with spring steel tines. Type 11, composition P (plastic tines) rakes shall be similar except the entire rake head' shall be made from plastic. The plastic shall be a minimum of 95 percent recycled material. The ferrule or socket shall have a hole suitable for securing the handle by means of a common rivet, screw, or bolt with nut. The handle shall fit tightly within the ferrule or socket.

3.3.1 Class A, Radial head, Composition S. The class A, composition S rake shall be similar to figure 4. The tines forming the head shall be separated at the raking end, grouped together and securely fastened to a steel ferrule at the handle end. The head of the rake shall ferrule shall extend over the handle. have a steel spreader bar attached to the tines in a fixed position at all times. The spreader bar shall be located between the tips of the tines and the ferrule. The head shall measure a minimum of 17 inches (43.2 cm) in width and have a minimum of 18, tines. The rake handle shall be a minimum of 42 inches (1.06 m) in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

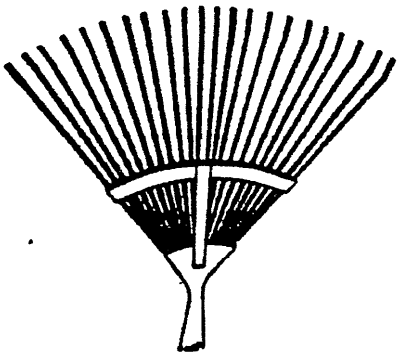

4 - Type II, Class A, Radial Head

3.3.2 Class A, Radial head, Composition P. The class A, composition P rake shall be similar to figure 4. The tines forming the head shall be separated at the raking end and joined together at the base of the head. The molded rake head shall include a ferrule which extends over the handle. The head shall measure a minimum of 22 inches (55.9 cm) in width and have a minimum of 21 tines. The rake handle shall be a minimum of 46 inches (1.17 m) in length.

3.3.3 Class B, Semiradial head. The class B rake shall be similar to figure 5. The tines forming the head shall be separated at the raking end, grouped together and securely fastened to a steel ferrule at the handle end. The ferrule shall extend over the handle. The head of the rake shall have a steel spreader bar attached to the tines to keep them evenly separated and to hold the tines in a fixed position at all times. The spreader bar shall be located between the tips of the tines and the ferrule. A backing spring or similar device to provide constant pressure on the head shall be secured to the ferrule, with the spring prongs attached to the spreader bar, to relieve pressure at the stress point on the tines. The rake handle shall be a minimum of 47 inches (1.19 m) in length.

3.3.3.1 Size 1, 18 inch head width. The size 1 rake head shall measure 18 to 20 inches (45.7 cm to 50.8 cm) in width and have 18 to 22 tines.

3.3.3.2 Size 2, 22 inch head width. The size 2 rake head shall measure 22 to 26 inches (55.9 cm to 66.0 cm) in width and have 21 to 26 tines.



Figure 5 - Type II, Class B, Semiradial Head

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.

3.3.4 Double-Rib aluminum head The head shall have a double-rib and be formed from extruded aluminum. The teeth shall be as shown in figure 6. The handle shall be powder coated and made to fit in between the double-rib of the head using one self-locking bolt and nut. TWO solid aluminum braces shall encompass the handle and connect to the head with self-locking bolts and nuts. The head shall be available in the following sizes as specified: 24 inch (61 cm), 30 inch (76 cm), 36 inch (91 cm), 42 inch (107 cm), 48 inch (122 cm). The head shall be constructed with one rounded tip tooth per each inch of head size. The head shall have a minimum depth of 4 inches (10.2 cm) . The rake shall have a 66 inch (1.68 m) handle with a 5 inch (12.7 cm) vinyl grip.

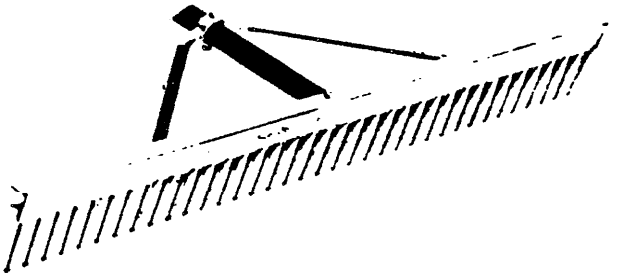


Figure 6 - Type 11, Class C, Double-Rib Aluminum Head

3.4 Finish. All metal surfaces shall have a painted, plated, lacquered, or enameled finish. Metal handles shall be plated, anodized, or have a painted finish. Wood handgrips shall be smooth and shall have an applied coating of varnish, lacquer, or polyurethane.

3.5 Identification marking. The rakes shall be marked with the manufacturer’s name or trademark. The use of an adhesive-backed label shall be acceptable.

3.6 Workmanship. The rakes shall be free from ragged edges, cracks, holes, pits, and other defects which would affect the appearance and serviceability of the item.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.9 **Standard commercial product.** The rakes shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. A standard commercial product is a product which has been sold or is currently offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures, and represents the latest production model.

4. REGULATORY REQUIREMENTS

4.1 **Recovered materials.** The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace, or is the same product that has been successfully delivered to the government on a previous contract or purchase order. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Presentation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part identification numberinq system. Items conforming with this Commercial Item Description shall be identified by a part identification number configuration consisting of identification of a portion of the Commercial Item Description number, type, class, composition, and size. An example of the part identification number configuration is shown below. This part identification numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part identification numbers are not required to be placed on the product or container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number, and date of this commercial item description.
b. Type, class, composition, and size required,
c. The preservation, packing, and marking required.

7.3 Figures. The figures shown herein are descriptive and not restrictive, and not intended to preclude the purchase of rakes which are otherwise in accordance with the requirements of this commercial item description.

7.4 National Stock Numbers (NSN's): The following is a list of NSN's assigned which correspond to this commercial item description. This list may not be indicative of all possible NSN's.

NSN	Type	Class	Comp.	Size	Nomenclature
3750-00-171-7182	I	A			Rake, Garden
3750-00-243-2408	I	B			Rake, Garden
3750-00-599-6101	II	A	S		Rake, Lawn
3750-01-372-4150	II	A	P		Rake, Lawn
3750-00-086-7690	II	B		1	Rake, Lawn
3750-00-903-0720	II	B		2	Rake, Lawn

MILITARY INTERESTS:

Custodians

Air Force - 99

Review Activities

Air Force - 84

PREPARING ACTIVITY:

GSA - 7FXEE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.