[INCH-POUND]
A-A-2862
March 31, 1994

COMMERCIAL ITEM DESCRIPTION

HEAD, SPRINKLER (Underground Connected)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification WW-H-001220.

1. SCOPE

1.1 Scope. This commercial item description covers sprinkler heads for installation in fixed underground piping systems for watering lawns.

2. CLASSIFICATION

2.1 Classification. The sprinkler heads shall be of the following types and classes, as specified (see 7.3).

Type I - Fixed Surface Head
Type II - Pop-up Head

Class 1 - Full circle pattern
Class 2 - Half circle pattern
Class 3 - Quarter circle pattern

3. SALIENT CHARACTERISTICS

3.1 Standard commercial product. The sprinkler head shall, as a minimum, be in accordance with the requirements of this Commercial Item Description (CID) and shall be the manufacturer's standard. commercial product. A standard commercial product is a product which has been sold or is currently offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures, and represents the latest production model.

3.2 Material. Sprinkler head bodies may be manufactured from copper alloy, zinc base alloy, brass, plastic, or any combination thereof.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any data which may improve this document should be sent to: General Semites Administration, Engineering Ground (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2020-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.3 Construction.

3.3.1 Type I - Fixed surface head. Type I sprinkler heads shall be designed to be installed flush with the ground, and with a top flange, 2-1/8 inches (54.0 mm) minimum diameter, to keep the grass away from the spray nozzle. The sprinkler head shall be fully adjustable for flow and coverage and shall be designed to produce a dense conical spray. The body shall be constructed with a 1/2 inch (12.7 mm) female thread (14 NPT) for installation in a fixed underground pipe system.

3.3.2 Type II - Pop-up head. Type II sprinkler heads shall be designed to be installed flush with the ground and equipped with a nozzle that rises a minimum of 2.5 inches (6.3 cm) above the body when the water is turned on. The nozzle shall have a positive retraction when the water is turned off. The rising member supporting the nozzle shall be identical on class 1, 2, and 3 sprinklers in order for the nozzles to be interchangeable. The sprinkler head shall be designed to produce a dense, fine-spray water distribution pattern and shall be adjustable for coverage and flow. The nozzle shall be removable from the head for flushing or cleaning. The body shall be constructed with a 1/2 inch (12.7 mm) female thread for installation in a fixed underground pipe system.

3.4 Performance. Type I and II sprinkler heads shall be capable of meeting the performance requirements of Tables I and II, respectively.

Table I - Performance Requirements, Type I Sprinkler Heads

Class	Pattern type	Water Pressure	Flow GPM	Minimum Coverage
1	Full Circle	15 psi	1.6 - 1.8	20 ft. diameter
2	1/2 Circle	15 psi	0.8 - 1.0	10 ft. radius
3	1/4 Circle	15 psi	0.4 - 0.45	10 ft. radius

Note: Metric equivalents - 10 ft. = 3.1 m, 20 ft. = 6.1 m, 15 psi = 103.4 Kpa, 0.4 gam = 0.025 L/s , 0.45 gam = 0.028 L/s, 0.8 gam = 0.05 L/s, 1.0 gam = 0.06 L/s, 1.6 gam = 0.10 L/s, 1.8 gam = 0.11 L/s.

3.5 Workmanship. The sprinkler heads shall be free from porosity, cold shuts, cracks, sharp edges, projections, and defects which might impair their performance or appearance. Surfaces shall be free from flaws, and cracked or peeling plating or paint. Water inlets and caps shall not leak. No defect that affects appearance or serviceability shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Table II - Performance Requirements, Type II Sprinkler Heads

Class	Pattern type	Water Pressure	Flow GPM	Min. Coverage
1	Full Circle	20 psi	2.9 - 3.3	24 ft. diameter
2	Half Circle	20 psi	1.8 - 2.2	12 ft. radius
3	Quarter Circle	20 psi	0.9 - 1.5	12 ft. radius

Note: Metric equivalents - 12 ft. = 3.7 m, 24 ft. = 7.3 m, 20 psi = 137.9 Kpa, 0.9 gam = 0.06 L/s, 1.5 gam = 0.09 L/s, 1.8 gam = 0.11 L/s, 2.2 gam = 0.14 L/s, 2.9 gam = 0.18 L/s, 3.3 gam = 0.20 L/s.

3.6 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated are for informational purposes only.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for changes to this document.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offerer/contractor is encouraged to use recovered materials in accordance with public Law 94-580, as amended, to the maximum extent practicable.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.


6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part Numbering. Sprinkler heads conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the CID number, type, and class sprinkler head. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part numbers are not required to be placed on the product or container.

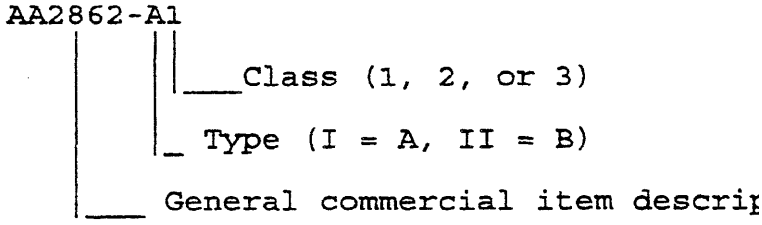

7.2 Sources of documents.

7.2.1 Sources of Governmental documents. Copies of Federal standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA, and the GSA Specifications Unit (3FBP-W), Suite 8100, 470 E. L'Enfant Plaza, S.W., Washington, DC 20407.

7.3 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable) .

a. Title, number and date of this commercial item description.
b. Type and class required.
c. Preservation, packing & marking required.

7.4 National Stock Numbers (NSN's): The following is a list of NSN's which reference this CID. The list may not be indicative of all possible NSN's associated with this CID.

NSN	Type	Class
3750-00-679-2576	I	1
3750-00-679-2577	I	2
3750-00-679-2578	I	3
3750-00-679-2574	II	1
3750-00-679-2573	II	2
3750-00-679-2575	II	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.