[INCH-POUND]
A-A-521A
February 6, 1998
SUPERSEDING
A-A-521
November 19, 1979

COMMERCIAL ITEM DESCRIPTION

SAW, CIRCULAR, GASOLINE ENGINE DRIVEN, PORTABLE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a rescue saw which is commonly used for the purpose of removing personnel lodged in damaged aircraft and other emergency evacuation needs.

2. CLASSIFICATION. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Performance.

Powered by an air cooled, single cylinder, two-cycle gasoline engine.
Minimum engine displacement of 4.4 cubic inches (72.4cc) which develops 4.7 brake horsepower minimum, when tested in accordance with the requirements of SAE Standard J1349, and having a wheel speed of 6,300 RPM maximum in accordance with ANSI B7.5-1990 and ANSI B7.1-1988.

3.2 Functional characteristics.

Capable of cutting in any position.
All controls (fuel primer or choke, throttle and ignition switch) conveniently positioned for operator control in accordance with the requirements of ANSI B7.5-1990.
Weight (less fuel and blade) 31 pounds maximum.
High strength V-belt housed in a safety guard. (See ANSI B7.5-1990)
Adjustable blade guard.
Non-tip type base stand.
12 inch saw blade capacity.
Furnished with: Complete set of operating and maintenance instructions
List of available accessory equipment
Illustrated parts breakdown
Special equipment and tools necessary to assure efficient operation and maintenance in accordance with the instructions.
Each saw with accessaries, instructions, etc., shall be furnished in a metal carrying case.

3.3 Accessories furnished:

1 ea	12 inch diameter carbide tipped blade
1 ea	Maximum12 inch diameter reinforced steel cutting abrasive wheel in accordance with ANSI B7.5-1990 and ANSI B7.1-1988.
1 ea	Maximum 12 inch diameter reinforced concrete abrasive wheel in accordance with ANSI B7.5-1990 and ANSI B7.1-1988.
1 ea	Safety can of one gallon capacity, in accordance with Underwriters' Laboratories Standard Number 30, or Factory Mutual (FM) Safety Can Standard 6051/6052.
1 pr	Protective eyeware and clear protective face shield
1 ea	Spare drive belt
1 ea	Spare air filter
1 ea	Six (6) each 1/4 pint bottles of the manufacturer's recommended SAE approved 2-cycle engine oil.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliance Center, (6FETA) 1500 East Bannister Rd., Kansas City, MO 64131-3088.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.

3.4 Illustration. Except for the technical requirements (e.g., design, dimensions), the illustration herein is descriptive and is not intended to preclude the purchase of items otherwise conforming to the requirements of this description.

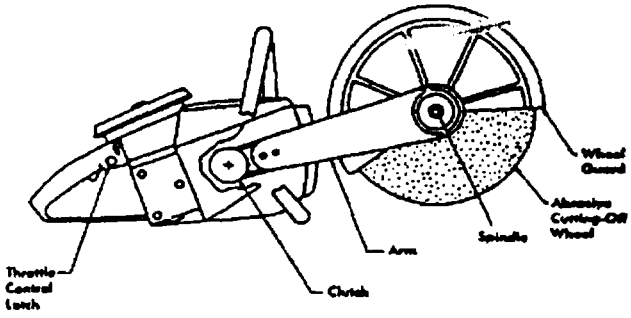


FIGURE NO. 1
Gasoline-powered, hand-held, portable, abrasive cutting-off machine. Right Side.

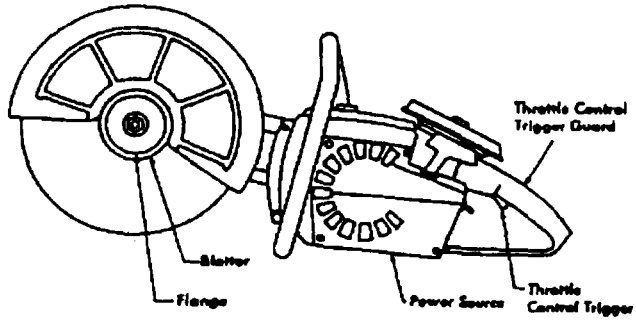


FIGURE NO. 2
Gasoline-powered, hand-held, portable, abrasive cutting-off machine. Left side.

3.5 Identification Marking. The saw shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.6 Safety warning The saw housing shall be stamped, labeled or otherwise marked by the manufacturer with the following: WARNING - USE SAFETY FOOTWEAR, SNUG FITTING CLOTHING, PROTECTIVE EYEWARE AND PROTECTIVE FACE SHIELD, RESPIRATORY PROTECTION AND HEARING AND HEAD PROTECTION DEVICES WHILE USING A CUTTING OFF MACHINE.

3.7 Workmanship. The saw, including all parts and accessories, shall be free from fins, burrs, rust, imperfections and any other defects which may impair serviceability, durability, or appearance.

4. REGULATORY REQUIREMENTS.

The issue of SAE Standard J1349, UL Standard 30, FM Standard 6051/6052, ANSI B7.5-1990, and ANSI B7.1-1988, in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Contractors Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace. When specific quality assurance provisions are specified for any commercial characteristic, the contractor shall maintain records resulting from his inspection(s) conducted in accordance with the specific quality assurance provisions. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract. The Government reserves the right to audit the contractor's quality assurance records.

5.2 Responsibility of Inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s) When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Preservation, packaging, packing, and marking. Each saw with accessory parts shall be preserved and packaged in accordance with normal commercial practice and packaged to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be in accordance with contract or order.

7. NOTES.

7.1 Addresses for obtaining copies of referenced documents.

SAE Standards are available from Society of Automobile Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.

ANSI Standards are available from ANSI, 11 W. 42 ST, 13th Floor, NY, NY 10036

UL Standards are available from Underwriter's Laboratories, Inc., 333 Pfingsten Rd., Northbrook, IL 60062-2096.

FM Safety Can Standards are available from Global Engineer, Suite 407, 7730 Carondelet Ave., Clayton, MO 63105.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

a. Title, number, and date of this Commercial Item Description.
b. When applicable, the appropriate NSN.
c. If bid samples are required and the number of samples required.
d. If first article samples are required.
e. If lot sampling inspection is required and the applicable lot sampling requirements.

7.3 National Stock Number(s) (NSNs). The following NSN is associated with this Commercial Item Description (CID). This list may not be indicative of all possible NSNs associated with this CID:

NSN 5130-00-134-1207

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.