
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-98/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal unit described herein shall consist of this document and the latest issue of Military Specification MIL-C-3098.

Pertinent characteristics: 50 to 134 MHz; fifth mechanical overtone; noncontrolled; series.

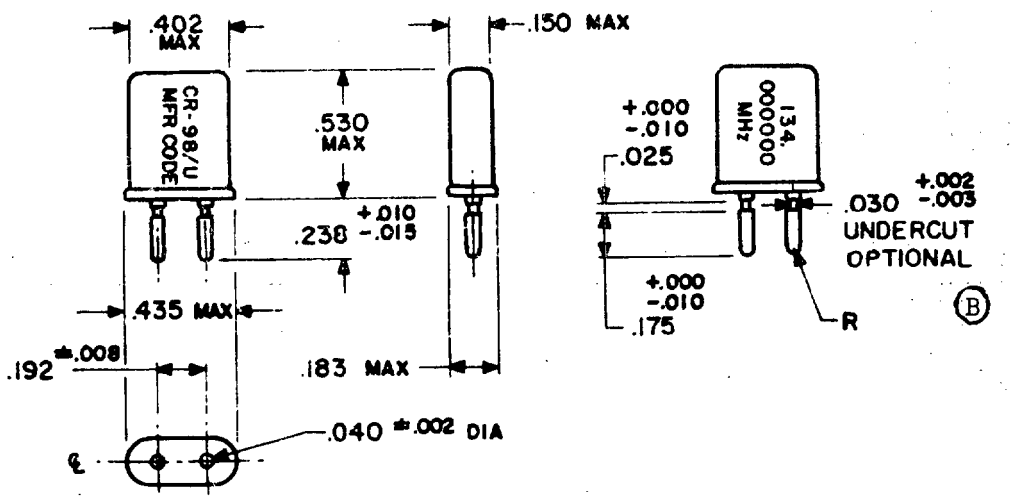

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.015	.38	.150	3.81	.238	6.05
.003	.08	.025	.64	.175	4.45	.402	10.21
.008	.20	.030	.76	.183	4.65	.435	11.05
.010	.25	.040	1.02	.192	4.88	.530	13.46

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm TO THE NEAREST .01 mm.

(B) DENOTES CHANGES

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:41Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements

Requirement	Specified Value or Condition
Holder	HC-25/U (MIL-H-10056/11)
(B) Dimensions, marking, and configuration	See Figure
Frequency range	50 to 134 MHz, inclusive
Capacitance, shunt	7 pf, maximum
Mode of oscillation	Fifth mechanical overtone
Government reference standard test set	TS-683/TSM Up to 98 MHz AN/TSM-15 Above 98 MHz
Rated drive level	2.0 ±0.4 mw
Calibration values	Resistance 60 ohms Voltage drop 0.35 volt
Resonance	Series
Operating temperature range (noncontrolled)	-30° to +71°C, inclusive
Frequency tolerance	±0.0015 percent
Equivalent resistance	MHz / Ohms, Maximum 50 to 90 / 50 90+ to 134 / 60
Shock:	
Frequency change permitted	±0.0005 percent
Equivalent resistance change permitted	±10 percent
Vibration: 1/	
Frequency change permitted	±0.0005 percent
Equivalent resistance change permitted	±10 percent
Temperature cycling:	
Frequency change permitted	±0.0005 percent
Equivalent resistance change permitted	±10 percent
Aging:	
Frequency change permitted	0.0005 percent

1/ Method 204 of MIL-STD-202, test condition A.

NOTES:

A. These crystal units are for use in the Wilcox R-1250/GR receiver. They were previously fabricated to the requirements specified in Air Force Technical Order 12-1-20, Supplement No. 16 and/or Wilcox Drawing No. 247296-4.

B. Formula for computing the crystal frequency is: $F_x = F_o - 17$ MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:41Z
Check the source to verify that this is the current version before use.

Custodians:
Air Force - 84

Review activities:
Air Force - 11, 85

User activities:
Air Force - 17, 19

Preparing activity:
Air Force - 84

Project No. (5955-F171-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:41Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFLC/MMGE/Standardization
WPAFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:41Z
Check the source to verify that this is the current version before use.