MIL-C-3261E(USAF)
16 January 1980
SUPERSEDING
MIL-C-3261D(USAF)
28 June 1973

MILITARY SPECIFICATION

CAPS, GARRISON, AIR FORCE, BLUE

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers Air Force garrison caps.

1.2 Classification

1.2.1 Types. The caps shall be furnished in the following types and classes as specified (see 3.1.1, 3.1.2, and 6.2):

Type I - Polyester-wool serge cloth
  Class 1 - General officers
  Class 2 - Officers
  Class 3 - Airmen

Type II - Polyester-wool tropical cloth
  Class 1 - General officers
  Class 2 - Officers
  Class 3 - Airmen

Type III - Texturized polyester serge cloth
  Class 1 - General officers
  Class 2 - Officers
  Class 3 - Airmen.

1.2.2 Sizes. The caps shall be furnished in the following sizes as specified (see 6.2):

6-3/8 6-1/2 6-5/8 6-3/4 6-7/8 7 7-1/8 7-1/4
7-3/8 7-1/2 7-5/8 7-3/4 7-7/8.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENESS, Wright-Patterson AFB, OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	Thread, Cotton
DDD-L-20	Label: for Clothing, Equipage, and Tentage (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-C-368	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-1667	Braid, Textile, Cord-Edge
MIL-S-3577	Sweatband, Headwear, Leather
MIL-C-21115	Cloth, Tropical: Wool, Polyester/Wool
MIL-S-43993	Sweatband, Headgear: Artificial Leather
MIL-C-83048	Cloth, Serge, Polyester/Wool
MIL-C-83448	Cloth, Serge, Polyester, Texturized

STANDARDS

FEDERAL

FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-901	Provisions for Evaluating Quality of Caps, Garrison, Men's

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following publication forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Defense (DOD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Copies of this publication can be obtained from The Color Association of the United States, Inc.; 200 Madison Avenue; New York, New York 10016.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using Federal agencies).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic material. The basic material for the caps shall be blue, conforming to USAF color shade No. 1578 (see 6.3). The basic material for the type I cap shall conform to MIL-C-83048. The basic material for the type II cap shall conform to type III, class 3 of MIL-C-21115. The basic material for type III cap shall conform to MIL-C-83448.

3.1.2 Braid. The braid for classes 1, 2, and 3 caps shall conform to classes 5, 6, and 7 of MIL-B-1667, respectively. The polyester yarn described in MIL-F-1667, in lieu of rayon yarn, may be used for the cord cover of the braid.

3.1.3 Sweatband. The sweatband shall be dyed brown, shall be not less than 7/8 inch wide, and shall conform to MIL-S-3577 or to MIL-S-43993. The leather sweatband shall be embossed with an imitation turn line 1/8 inch from the top edge.

3.1.4 Sweatband reinforcement. The sweatband reinforcement shall be a 5/8-inch-wide strip of either print cloth or sheeting that is coated lightly on both sides with pyroxylin or vinyl.

3.1.5 Lining. The lining shall conform to class 1 of MIL-C-368 and shall be gray, conforming to USAF color shade No. 1154 (see 6.3).

3.1.6 Thread. The thread for all sewing except the basting thread shall conform to type IA3, 3 ply, ticket No. 40 and 50 of V-T-276 and to type IA3, 2 ply, ticket No. 70 of V-T-276. Except for the thread used for stitching that will appear on the sweatband, the thread shall be vat dyed Navy Blue AT Cable No. 66060 (see DOD Standard Color Card of Official Standardized Shades for Sewing Thread 1968). The thread for the stitching that will appear on the sweatband shall be brown, approximately matching the sweatband, and shall have good colorfastness to light, perspiration, and wet dry cleaning.

3.2 Construction. The caps shall be constructed in accordance with table I; however, the manufacturer will not be required to follow the exact sequence in which the operations are listed unless otherwise specified in table I. Additional basting or holding stitching to facilitate the manufacture of the cap will be permissible provided the threads are removed or will not show in the finished cap. Notches to facilitate the assembly or to control the size of the cap, in addition to the notches on the patterns, will be permissible provided the notches will not weaken the cap and will not be visible in the finished cap.

3.2.1 Stitches, seams, and stitchings. Stitches, seams, and stitchings shall conform to FED-STD-751. Wherever two or more methods of seaming or stitching types are specified for the same operation, any one of them may be used. The looper (under thread) of stitch type 401 shall be on the inside of the cap. The stitches per inch specified in table I shall be interpreted to be the minimum and the maximum permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations.

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitch Per Inch
		Top	Lower			
1	Cut parts (a) The parts of the cap shall be cut in strict accordance with the patterns (see 3.3) and on the straight in the direction of the warp of the material. All polyester-wool parts of the cap shall be cut out of one piece of material. All texturized polyester parts shall be cut out of one piece of material.					
2	Replace defective or damaged parts (a) Any part that contains a hole or any weakening defect such as a smash, multiple floats, or a loose slub that might develop into a hole shall be replaced at the time of cutting. (b) Any part that contains workmanship damage such as a hole, a scissor or knife cut, a tear, a mend, a burn, or needle chews that might develop into a hole shall be replaced during the manufacturing process.					
3	Shade mark parts (a) All parts of the cap shall be marked, bundled, or ticketed to insure the proper assembly of size and shade.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
4	Attach or apply label					
	(a) The bottom of the label shall be centered, 1 inch above the bottom raw edge, on the left (as worn) panel lining piece and stitched 1/16 inch from the edge on all four sides of the label. OR (b) The label shall be applied in the center, 1 inch above the bottom raw edge, on the left (as worn) panel lining piece. Note: The label shall be attached or applied before the panel lining pieces are joined to the outer shell. The personal identification (name and serial number) at the top of the label shall appear above the sweatband in the finished cap.	50	50	301	LSbj-1	10-14
5	Make crown					
	(a) The crown pieces (outer shell and lining) shall be stitched together with a 3/16-inch gage.	50	50	101 or 301	SSa-1	12-14
	(b) The crown shall be folded in half lengthwise. The halves of the crown shall be single stitched together at the fold with a 3/8-inch (plus or minus 1/8-inch) seam at the center, tapering to nothing, not more than 1/2 inch from each end of the crown, with the ends of the stitching securely backstitched.	50	50	301	OSf-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower'			
6	Join panels to crown					
	(a) The panel pieces (outer shell and lining) shall be positioned even with the corresponding edges of the crown and joined to the crown.	50	50	301 or 401	LSq-2(a)	12-14
	(b) The seams joining the panels to the crown shall be turned toward the center of the crown and raised stitched 1/16 inch from the edge of the crown seam, catching all seam allowances in the stitching. The bottom of the stitching shall not show through to the outside of the panels (outer shell or lining).	50	50	301 or 401	LSq-2(b)	12-14
7	Join panels					
	(a) The panel pieces shall be positioned even, face to face. The panel lining pieces shall be positioned even, face to face. The front seam of the panel pieces and the front seam of the panel lining pieces shall be stitched in one continuous stitching. The back seam of the panel pieces and the back seam of the panel lining pieces shall be stitched in one continuous stitching. When stitching the front and the back seams of the panels, the seam allowance of the panels (outer shell) and the crown shall be turned toward the top.	50	50	301	LSq-2(a)	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) The front and the back seams of the panels (outer shell) shall be pressed open and flat with a heated pressing iron. (c) The cap shall be turned so that the basic fabric will be on the outside. The front and the back seams joining the panels (outer shell) adjacent to the crown points shall be smoothed out. (d) The bottom edges of the panels (outer shell and lining) shall be overedge stitched together. (e) The panels and the crown shall be pressed smooth and flat with a heated pressing iron or machine, making sure the crown is pressed below the panel edges.	70	70	503 or 504 or 505	EFd-1	8-10
8	Join braid to curtain (a) The tape of the cord-edge braid shall be joined to the upper edge of the curtain. Note: No. 8(a) may be omitted provided that the top of the curtain is positioned tightly against the cord edge of the braid in the finished cap.	50	50	301 or 101 or 401	LSq-3(a)	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) The raw edges of the seam and the edge of the tape of the cord-edge braid shall be overedge stitched together, or the raw edge of the curtain may be overedge stitched separately. If the raw edge of the curtain is overedge stitched separately, the tape of the cord-edge braid will not need to be overedge stitched.	70	70	503 or 504 or 505	EFd-1	8-10
	(c) The cord-edge braid shall be turned over, and the curtain edge shall be stitched with a double row of stitching, 1/8-inch to 3/16-inch gage, with the first row of stitching 1/16 inch from the edge. Note: The cord-edge braid shall be sewn onto the curtain evenly so that the cord-edge braid or the curtain will not be wavy or puckered. The cord-edge braid at the underlapping end of the curtain (left side of cap as worn) shall extend to the end of the curtain.	50	50	301 or 401	LSq-3(b)	12-14
	(d) The curtain shall be pressed smooth and flat with a heated pressing iron before the curtain is joined to the side panels.					
9	Join curtain to panels					
	(a) The ends of the curtain shall be overlapped (left side over right side of cap as worn), matched with the front and the back seams of the panels in the position	50	50	301 or 401	SSa-1	6-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	worn, and joined together as indicated by the pattern notches. The left end of the curtain shall be sewn slightly full from the notch to the end to avoid a tight edge when the cap folds at the front.					
	(b) A basting stitch that utilizes a good commercial thread shall be sewn across the bottom of the curtain 5/8 inch from the bottom raw edge.	50	50	101	OSa-1	6-8
	(c) The bottom serged edge of the panels shall be positioned at the exact line of the basting stitch specified in No. 9(b). The curtain shall be joined to the panels with a single row of stitching.	50	50	301 or 401	LSa-1	6-8
	Note: The curtain shall cross itself at the front seam of the cap; a tolerance of 1/4 inch from the exact alignment will be allowed.					
	(d) The basting stitch specified in No. 9(b) shall be removed before the sweatband is joined to the curtain.					
10	Press cap					
	(a) A side shaper shall be inserted between the curtain and the side panels on each side of the cap. The curtain shall be smoothed on the shaper.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) The cap shall be pressed smooth and flat with a heated pressing machine or a heated steam iron, with the bottom edge folded and creased. The front and the back of the curtain shall not be creased. Note: The cap shall be completely pressed before the sweatband is attached (see No. 11)					
11	Make and attach sweatband (a) The sweatband shall be cut to the required length. A two-piece sweatband shall not be used.					
	(b) The ends of the sweatband, with the sweatband reinforcement on the underside, shall be abutted and joined with a row of zigzag stitching.	40	40	304	FSe-1	8-12
	(c) The lower edge of the sweatband shall be zigzag stitched, under even tension, to the bottom of the panels, through the curtain, 5/8-inch outlet only. The zigzag stitching shall be superimposed on and parallel to the serged edge of the panels and shall not show on the outside of the curtain. The sweatband shall not be exposed beyond the bottom pressed edge and shall not be more than 1/4 above the bottom pressed edge of the cap. The abutted seam of the ends of the sweatband shall not be less than 1 inch or more than 2 inches to the right or the left of the back seam of the cap.	40	40	304	LSa-1	8-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	OR Note: In lieu of No. 11(b) and 11(c), the sweatband may be attached to the curtain as specified in No. 11(d) and 11(e).					
	(d) The sweatband shall be zigzag stitched thro[illegible] the curtain seam allowance and the panel [illegible]th the ends of the sweatband over[illegible]ping 3/4 inch (plus or minus 1/4 inch) and the line of stitching overlapped. The ends of the sweatband shall not overlap at the back seam of the cap. The double ply of the sweatband shall be not less than 1 in[illegible] or more than 2 inches from the seam of the cap.	40	40	304	LSa-1	10-14
	(e) The overlapped end of the sweatband shall be zigzag stitched to the underlapped portion of the sweatband. The stitching shall be through the sweatband only.	40	40	304		10-12
12	Clean cap (a) All ends of the stitching shall be trimmed. Loose threads shall be removed from the cap. (b) All spots, stains, and pin tickets shall be removed from the cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. (Continued)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
13	Finish press (a) The entire cap shall be touched up as necessary, using live steam, to remove all wrinkles and unwanted creases. (b) All gloss and pressing impressions shall be removed from the cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

3.2.1.1 Thread breaks and end of seams and stitchings. Thread breaks of all stitch types shall be secured by stitching back of the break not less than 1/2 inch. Ends of seams produced with stitch type 301, if not caught in other seams or stitching or if not the end of a continuous line of stitching, shall be backtacked not less than 1/4 inch. The ends of continuous line of stitching shall overlap not less than 1/2 inch.

3.2.2 Cutting. The parts of the cap shall be cut from the material specified in accordance with the pattern parts specified in table II.

TABLE II. Pattern parts.

Materials	Pattern Parts 1/	Cut Parts
Basic material (see 3.1.1)	Crown	1
	Panel (side)	2
	Curtain	1
Lining (see 3.1.5)	Crown	1
	Panel (side)	2

1/ One pattern part for the crown and one pattern part for the panel will be furnished and shall be used to cut both the basic material and the lining.

3.3 Patterns. Standard patterns that show size, shape, and notches for proper assembly of all parts will be furnished by the Government (see 6.2). Unless otherwise specified herein, the standard patterns will provide a seam allowance of 1/4 inch. The standard patterns shall be used as a guide in cutting the manufacturer's working patterns. The manufacturer's working patterns shall be identical in size and shape to the standard patterns. The standard patterns and the manufacturer's working patterns shall not be altered in any way.

3.4 Finished measurements. The finished measurements of the cap shall conform to table III.

3.5 Label. The cap shall have a combination identification, size, and personal identification label that conforms to type I or IV, classes 4 and 10 of DDD-L-20. The label shall have colorfastness to dry cleaning. The label shall include the following information:

Name _____
Serial No._____
Cap, Garrison, Air Force, Blue
Size 1/
MIL-C-3261E(USAF)
Stock No. 1/
Manufacturer's Name o[illegible]ademark 1/
Wool Content Informa[illegible] 1/
Dry Clean Only

1/ The manufacturer shall insert the applicable information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements.

Cap Size	Head Size	Finished Measurements in Inches 1/ 2/					
		Height of Panels			Height of Curtain		
		Overall at Side-Center	Back	Front	At Sides	At Front Center	At Back Center
6-3/8	20-1/8	4-5/8	3-5/8	3-3/8	3-1/4	2-3/8	2-5/8
6-1/2	20-1/2	4-5/8	3-5/8	3-3/8	3-1/4	2-3/8	2-5/8
6-5/8	20-7/8	4-13/16	3-11/16	3-7/16	3-5/16	2-7/16	2-11/16
6-3/4	21-1/4	4-13/16	3-11/16	3-7/16	3-5/16	2-7/16	2-11/16
6-7/8	21-5/8	4-7/8	3-3/4	3-1/2	3-3/8	2-1/2	2-3/4
7	22	4-7/8	3-3/4	3-1/2	3-3/8	2-1/2	2-3/4
7-1/8	22-3/8	4-15/16	3-13/16	3-9/16	3-7/16	2-9/16	2-13/16
7-1/4	22-3/4	4-15/16	3-13/16	3-9/16	3-7/16	2-9/16	2-13/16
7-3/8	23-1/8	5	3-7/8	3-5/8	3-1/2	2-5/8	2-7/8
7-1/2	23-1/2	5	3-7/8	3-5/8	3-1/2	2-5/8	2-7/8
7-5/8	23-7/8	5-1/16	3-15/16	3-11/16	3-9/16	2-11/16	2-15/16
7-3/4	24-1/4	5-1/16	3-15/16	3-11/16	3-9/16	2-11/16	2-15/16
7-7/8	24-5/8	5-1/8	4	3-3/4	3-5/8	2-3/4	3

1/ Except for the head size, the tolerance shall be plus or minus 1/8 inch. The tolerance for the head size shall be plus 1/4 or minus 1/8 inch.

2/ Except for the head size, the finished measurements shall be taken with a ruler. The finished measurement of the head size shall be taken with a gage. The overall height measurements of the panels shall be taken at the front, the back, and the center of the cap from the bottom folded edge of the curtain to the top edge of the panels. The finished measurements of the height of the curtain shall not include the braid and shall be taken at the front, the back, and both sides at the point where the front lap-over terminates from the bottom folded edge of the curtain to the top edge of the curtain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The caps shall be constructed in a thoroughly workmanlike manner.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. The inspection required by this specification is classified as quality conformance inspection.

4.2.1 Materials and conponents. The materials and the components shall be inspected in accordance with the documents referenced herein to the extent applicable.

4.2.1.1 Certificates of compliance. Certificates of compliance will be acceptable for the requirements specified for the print cloth or sheeting in 3.1.4. If a certificate of compliance is furnished for any requirement specified herein, the Government shall have the right to check test items to determine the validity of the certification.

4.2.2 End items. The caps shall be examined as specified in 4.2.2.1 and 4.2.2.2. The sample unit for these examinations shall be one cap.

4.2.2.1 Visual examination. The caps shall be subjected to the end item examination described in MIL-STD-901. The occurrence of defects during this visual examination shall not exceed the applicable point value limit specified in MIL-STD-901.

4.2.2.2 Dimensional examination. The caps shall be subjected to the dimensional examination described in MIL-STD-901. The occurrence of defects during this dimensional examination shall not exceed the applicable point value limit specified in MIL-STD-901.

4.2.3 Examination of packaging. Shipping containers fully prepared for delivery, except for closure, shall be subjected to the packaging inspection described in MIL-STD-901. The sample unit for this packaging inspection shall be one shipping container fully prepared for delivery, except for closure. The occurrence of defects during this packaging inspection shall not exceed the applicable point value limit specified in MIL-STD-901.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

5.1.1 Level A

5.1.1.1 Unit packaging. Each cap shall be inserted in a bag that is made of transparent polyethylene film. The bag shall not be sealed (see 5.3.1) and shall be a minimum of 1 inch longer than the cap.

5.1.1.2 Intermediate packaging. Forty caps of one size only, packaged as specified in 5.1.1.1, shall be packaged in a box that conforms to type CF or SF, class domestic, style FTC of PPP-B-636. The minimum bursting strength of the box shall be 175 pounds per square inch (psi). The inside dimensions of the box shall be approximately 15 inches long, 12-1/2 inches wide, and 5-1/2 inches deep. The box shall be closed by applying tape across the lengthwise seams and extending the tape along the bottom and up the side of the box at least 2 inches. The tape shall be a minimum of 2 inches wide and shall conform to type II, class 2 of PPP-T-45.

5.1.2 Level C. The caps shall be packaged in accordance with Industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Two-hundred and forty caps of one size only, packaged as specified, shall be packed in a shipping container that is constructed, closed, and reinforced to conform to type CF or SF, class weather-resistant, style RSC of PPP-B-636. The minimum bursting strength of the shipping container shall be 275 psi. The shipping container shall be securely sealed by applying adhesive (glue) throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive.

5.2.2 Level B. Two-hundred and forty caps of one size only, packaged as specified, shall be packed in a shipping container that is constructed and closed to conform to type CF or SF, class domestic, style RSC of PPP-B-636. The minimum bursting strength of the shipping container shall be 275 psi. The shipping container shall be securely sealed by applying adhesive (glue) throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive.

5.2.3 Level C. The caps shall be packed in a manner to insure acceptance by the carrier and safe delivery at destination. The shipping containers shall conform to the rules and regulations applicable to the mode of transportation.

5.3 Marking. Unit packages, intermediate containers, and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene packages. A white paper label with the stock number, the nomenclature, the quantity, and the size of the caps contained therein legibly printed or stamped thereon shall be inserted into the polyethylene bags so that it will be readable through the polyethylene.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The caps covered by this specification are intended to be worn as flight and duty headgear by male personnel of the Department of the Air Force.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Type, class, and size required (see 1.2.1 and 1.2.2)

(c) Standard patterns furnished by the Government (see 3.3)

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Color samples. Color samples can be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figure. Figure 1 shows the general design of the caps and is furnished for information only. If figure 1 conflicts with the text of this specification, the text of this specification shall apply.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Air Force - 11

Preparing activity:
Air Force - 11

Reviewers:
Air Force - 45, 99

Project No. 8405-F748

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

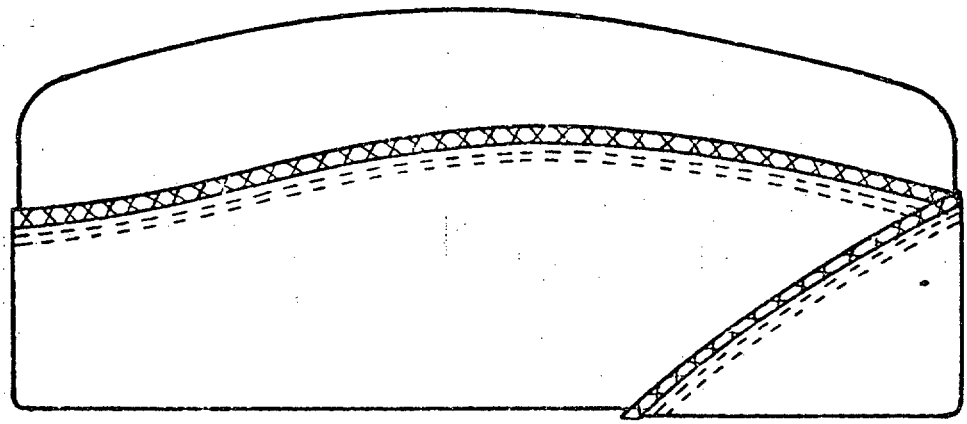


FIGURE 1. Cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil – Downloaded: 2026-10-10T17:24Z
Check the source to verify that this is the most current version before use.