INCH - POUND

MIL-DTL-13220/2A
26 May 2015
MIL-DTL-13220/2
25 September 2008

DETAIL SPECIFICATION SHEET

SLIP HOOK, CLEVIS

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-13220.

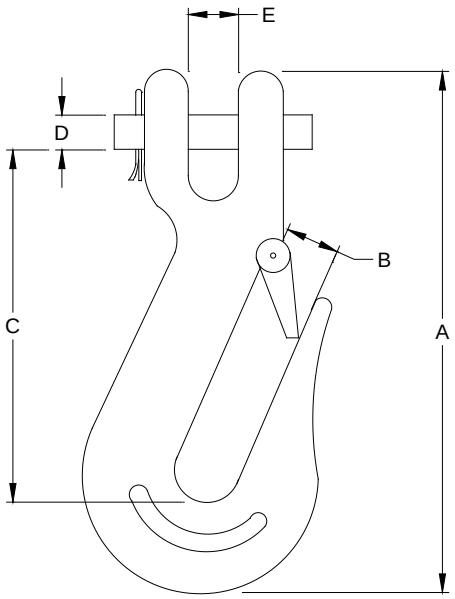

FIGURE 1. Slip hook, clevis.

AMSC N/A

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:13Z
Check the source to verify that this is the current version before use.

Dimensions and configurations: See figure 1.

Hook		Dimension					WLL
Code	Chain size	A	B	C	D	E	
W	1/4	4.00 (101.6)	0.60 (15.24)	2.56 (65.02)	0.28 (7.11)	0.40 (10.16)	1,000
X	5/16	4.50 (114.3)	0.63 (16.00)	2.70 (68.58)	0.37 (9.40)	0.46 (11.68)	1,500
Y	3/8	5.00 (127)	0.87 (22.10)	3.20 (81.28)	0.49 (12.45)	0.56 (14.22)	2,000
Z	1/2	6.50 (165.1)	1.00 (25.4)	4.00 (101.6)	0.62 (15.75)	0.70 (17.78)	3,000

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Chain size relates to the size of the chain to be used.
4. Work load limit (WLL) in pounds is recommended weight limit for safe.
5. Metal and finish:
   Cast or forged steel hooks with zinc finish in accordance ASTM B633, type 6.
   CRES steel hooks with passivation finish in accordance with SAE-AMS2700.

FIGURE 1. Slip hook, clevis - Continued.

Referenced documents. In addition to MIL-DTL-13220, this document references the following:

ASTM B633
SAE-AMS2700

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - MI
Navy - CG, MC
Air Force - 50, 70, 71

(Project 4030-2015-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:13Z
Check the source to verify that this is the current version before use.