MILITARY SPECIFICATION

DRUM, PACKING;

FOR M4A2 FLOATING SMOKE POT

1. SCOPE

1.1 This specification covers one type of steel drum for use in shipping smoke pots.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

FEDERAL

HH-G-156	-	Gaskets; Rubber (Natural or Synthetic), Molded, Sheet and Strip.
QQ-S-636	-	Steel; Carbon (Low-Carbon), Sheets and Strips.
TT-C-595	-	Colors, (For) Ready Mixed Paints.

MILITARY

JAN-C-490	-	Cleaning and Preparation of Ferrous Metal Surfaces for Organic Protective Coatings.
MIL-E-10687	-	Enamel; Lustreless, Quick-Drying (For Ammunition).
MIL-L-11195	-	Lacquer, Lustreless, Hot Spray.

U. S. ARMY

57-206	-	Welding of Constructional Steel, Metal-Arc, Manual or Machine; General Specification for.

STANDARDS

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking of Shipments.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:16Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material. - All materials used in the manufacture of the body, bottom, and cover of the drum shall be a minimum No. 20 (0.0359 inch) manufacturer's standard gage, dull finish, soft-skin-rolled temper, cold rolled steel conforming to Specification QQ-S-636.

3.2 Design and manufacture (see fig. 1).

3.2.1 Container. - The drum shall be cylindrical in shape with a minimum inside diameter of 14 inches and a minimum inside assembled height of 14-3/4 inches.

3.2.2 Side seam. - The side seam of the drum shall be welded in accordance with Specification 57-206.

3.2.3 Stacking. - The outside diameter of the bottom chime of the drum shall be of such a size and design as to produce a stacking fit with the inside diameter of the recessed cover of another drum.

3.2.4 Lever locking. - The drum shall be equipped with a lever locking device, which locks on the periphery and does not interfere with the stacking and rolling of the drum. The lever shall not extend beyond the rolling hoops.

3.2.5 Rolling hoops. - The drum shall have rolling hoops which extend beyond the lever look of the cover to facilitate rolling of the filled drum.

3.3 Cover gasket. - The drum shall have a natural or synthetic molded rubber cover gasket conforming to Specification HH-G-156. The gasket shall be securely affixed so it will remain in position when cover is removed.

3.4 Stability. - The drum shall be capable of stacking and rolling and not deformed when tested as specified in 4.4.1.

3.5 Leakage. - The drum shall not leak when tested as specified in 4.4.2.

3.6 Painting.

3.6.1 Preparation. - All metal surfaces of the drum shall be cleaned and prepared in accordance with grade I, type 1, 2, 3, 4, 5, or 6 of Specification JAN-C-490.

3.6.2 Finish. - One coat of color gray No. 3615 conforming to Specification TT-C-595 of either quick-drying, lustreless enamel conforming to Specification MIL-E-10687 or hot spray lustreless lacquer conforming to Specification MIL-L-11195 shall be applied to all metal surfaces of the drum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:16Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. - All work shall be done in a neat and workmanlike manner.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Lot. - A regular production lot shall consist of the drums of one design, produced by one manufacturer, from the same materials, and under essentially the same manufacturing conditions. The inspection lot for nondestructive inspection, within the above limitations shall be designated by the inspector.

4.2 Sampling.

4.2.1 For nondestructive inspection. - Sampling for nondestructive inspection shall be conducted in accordance with the authorized classification of defects (4.3.3) and Standard MIL-STD-105.

4.2.2 For destructive testing. - Ten representative drums shall be taken from each lot for testing as specified in 4.4 (see 6.2).

4.3 Inspection.

4.3.1 Components. - The inspector shall ascertain that all materials, components, or subassemblies of the drum covered by separate specifications or standards are in accordance with their respective specifications or standards prior to final acceptance of the drum.

4.3.2 Marking. - The inspector shall inspect the marking of the drum for compliance with section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:16Z
Check the source to verify that this is the current version before use.

4.3.3 Classification of defects. - Inspection of the drum shall be conducted as follows:

4.3.3.1 Drum, metal.

Categories and defects		Gage or other method of inspection
Major	AQL 1.5 percent	
1.	Diameter and depth incorrect	Scale
2.	Locking lever or rolling hoops missing or incorrect	Visual
3.	Inability of drums to nest	Functional
4.	Gasket missing or incorrect	Visual
5.	Welding incorrect	Visual
6.	Damage	Visual
7.	Marking incorrect	Visual
Minor	AQL 4.0 percent	
51.	Coating missing, inadequate, or incorrect	Visual
52.	Marking missing or illegible	Visual
Incidental	AQL 10 percent	
101.	Contamination	Visual

4.4 Tests.

4.4.1 Stability. - The drum, filled with approximately 50 pounds of coarse material of such a nature (see 6.3) that there are sufficient air spaces between the particles that the air introduced into the drum when tested as specified in 4.4.2 will be relatively unimpeded in its flow, shall be dropped four times from a height of 4 feet onto a concrete slab 6-inches thick or a 1/4-inch thick steel plate imbedded concrete, so as to strike diagonally on the top chime and other parts which might be considered weaker than the chime.

4.4.2 Leakage. - After completing the stability test, dry air at a controlled pressure of 3 ± 1/2 p.s.i. shall be introduced through a suitable nipple in the cover of one of the ten representative drums submitted for test. The same cover shall be used with each of the drums. The assembled drum, under the specified pressure, shall be submerged in water containing a wetting agent (see 6.4), in sufficient concentration to prevent bubbles from clinging to the surface, for a period of 1 minute. Leaking drums shall be returned to the manufacturer either for reworking and retesting or for salvage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:16Z
Check the source to verify that this is the current version before use.

4.4.3 Rejection. - If any drum fails to meet the requirements of 4.4.1 or 4.4.2 the lot represented shall be rejected.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing. - This item is of such a nature that packaging and packing is not required.

5.2 Marking. - In addition to any special marking required by the contract or order, all drums shall be marked in accordance with Standard MIL-STD-129.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the title, number, and date of this specification.

6.2 Sampling and testing. - When the contractor consistently produces high quality material and operates under a system of quality control acceptable to the Government, the Government, at its discretion, may modify in whole or in part the sampling and testing procedures specified herein. However, the Government reserves the right to return at any time, without previous notice to the contractor, to the sampling and testing procedures specified in this specification.

6.3 Gravel. - Washed gravel, 1/4 to 3/8 inch size, has been found satisfactory material for filling the drum in the stability test.

6.4 Wetting agent. - The following wetting agents, when used at a concentration between one and two percent, have been found satisfactory; Tween 20, Tween 40, Renex, Duponol G, and Alklyl Sulfonate.

Patent notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army - Chemical Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:16Z
Check the source to verify that this is the current version before use.

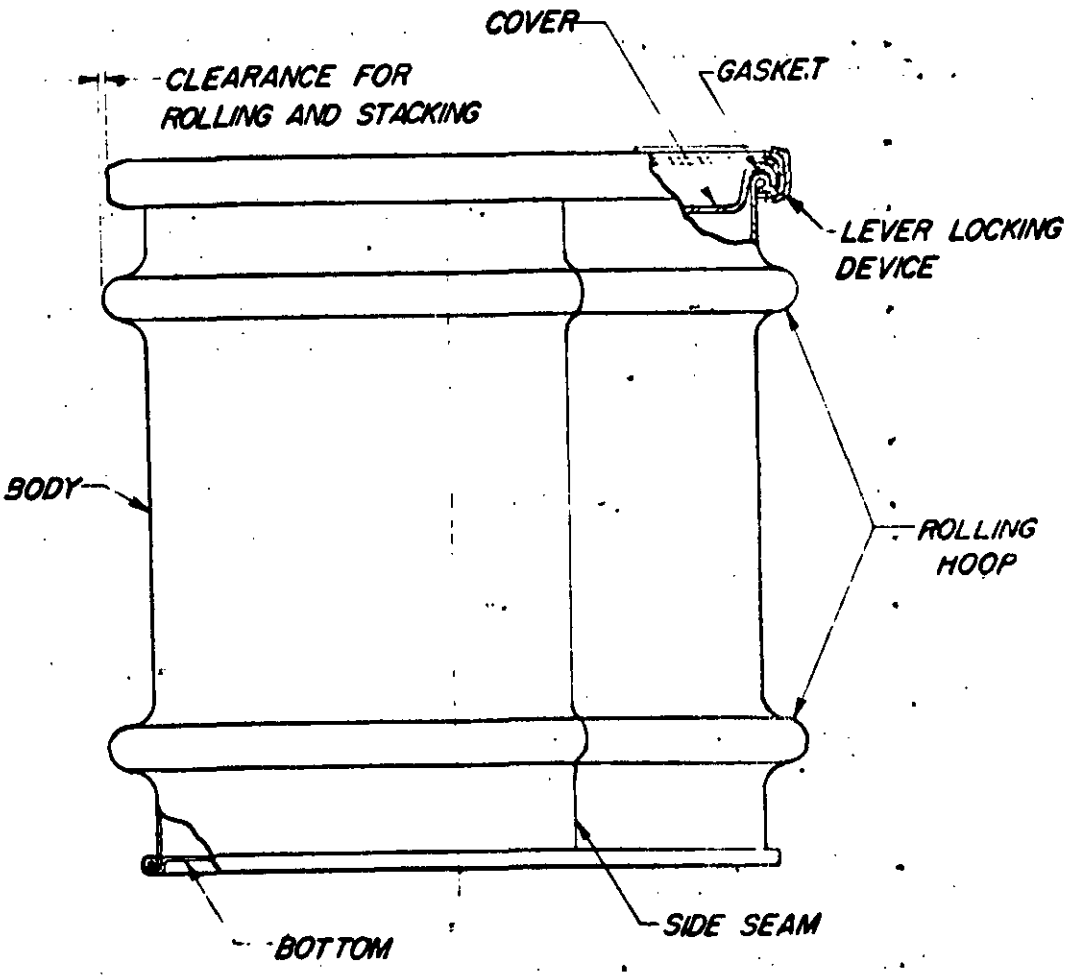


Figure 1. - Packing drum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:16Z
Check the source to verify that this is the current version before use.