MILITARY SPECIFICATION SHEET

SLEEVE, TERMINATION, ELECTRICAL, FLUXED SOLDER PREFORM, ENVIRONMENT RESISTANT, HEAT SHRINKABLE

The complete requirements for procuring the termination sleeve described herein shall consist of this document and the issue in effect of MIL-K-81786(AS).

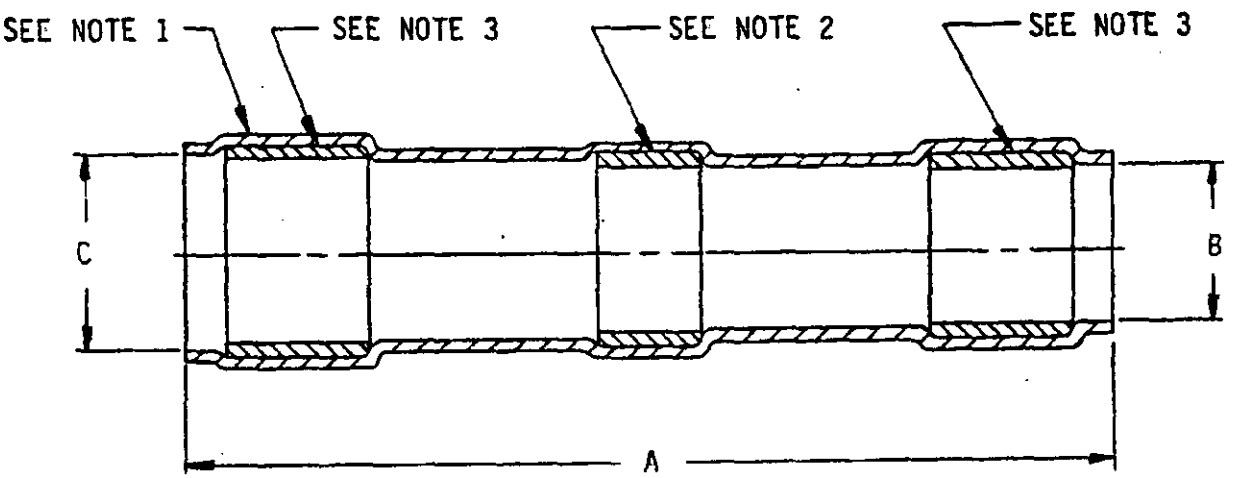

NOTES:

1. Insulation sleeve: heat-shrinkable, radiation-crosslinked, polyvinylidene fluoride, transparent blue.
2. Fluxed solder preform: Solder: in accordance with QQ-S-571, Type SN63.
   Flux: Type SRMAP in accordance with MIL-F-14256.
3. Sealing rings: immersion-resistant thermoplastic.

FIGURE 1. Sleeve.

AMSC N/A

FSC 492(

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimi

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: The termination sleeve shall meet the requirements of MIL-S-83519/1.

Sizes - See table I
Type - tubular
Color - Transparent Blue

TABLE I

Part No.	Dimensions (inches)			
	As Supplied			After Shrinking
	A	B min	C min	Outside Diameter max
M81786/8-1	.650 ± .07	.105	.145	.120
M81786/8-2	.650 ± .07	.170	.200	.150
M81786/8-3	.750 ± .07	.275	.300	.210

Preparing Activity:
Navy - AS
(Project No. 4940-N513)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:09Z
Check the source to verify that this is the current version before use.