MILITARY SPECIFICATION SHEET

SLEEVE, SEALING, CRIMP SPLICE, TRANSPARENT, HEAT SHRINKABLE, HIGH TEMPERATURE ALTITUDE IMMERSION SEAL

The complete requirements for procuring the sealing sleeve described herein shall consist of this document and the issue in effect of MIL-K-81786(AS).

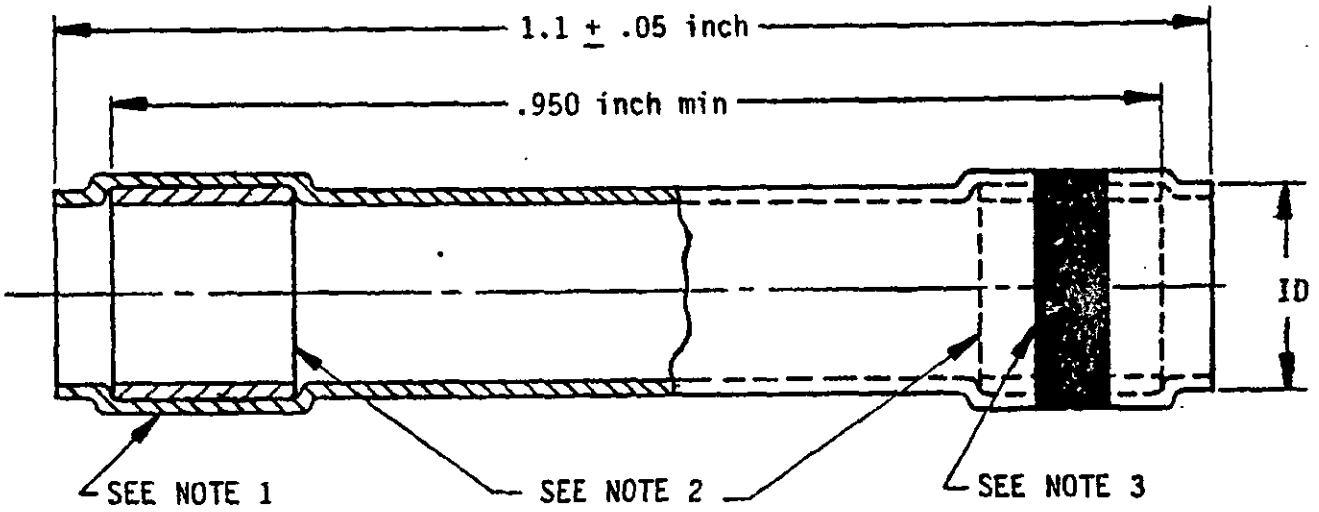

NOTES:

1. Outerjacket: heat-shrinkable, radiation-crosslinked modified polyvinylidene fluoride, transparent blue.
2. Meltable inserts: immersion-resistant thermoplastic.
3. Color coded insert or stripe in accordance with MIL-S-81824/1.

FIGURE 1. Sealing sleeve.

AMSC N/A

FSC 4

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlim

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:09Z
Check the source to verify that this is the current version before use.

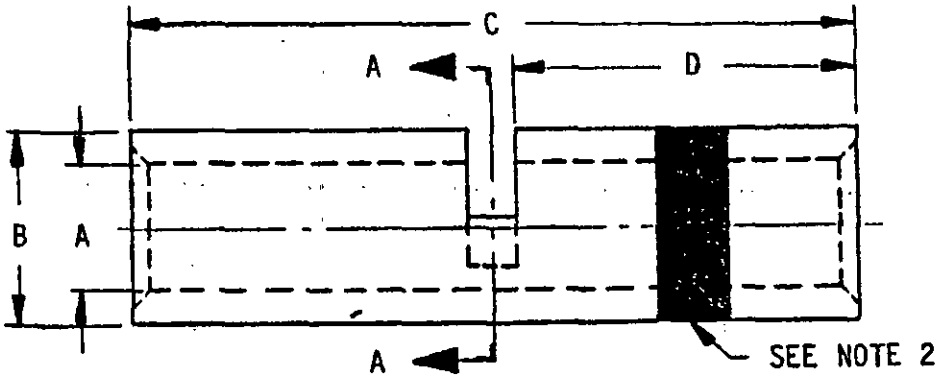



SECTION A-A

NOTES:

1. Base metal and plating in accordance with MIL-S-81824/1.
2. Stripe color coded in accordance with MIL-S-81824/1.

FIGURE 2. Crimp barrel.

REQUIREMENTS: The sealing sleeve - crimp splice assemblies shall conform to the requirements of MIL-S-81824/1.

Sizes - See Table I
Type - Tubular
Color - Transparent blue

TABLE I. Dimensions (inch).

Part No.	Sealing Sleeve, ID, min	Crimp Barrel				Color Code
		A	B	C	D	
M81786/9-1	.085	.053 / .045	.080 / .075	.510 / .490	.245 / .225	Red
M81786/9-2	.110	.070 / .063	.107 / .100	.585 / .565	.280 / .260	Blue
M81786/9-3	.170	.105 / .095	.155 / .146	.585 / .565	.280 / .260	Yellow

Preparing activity:
Navy - AS
(Project No. 4940-N514)

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:09Z
Check the source to verify that this is the current version before use.