
MILITARY SPECIFICATION SHEET

CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY STYLE CDR32 METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-55681.

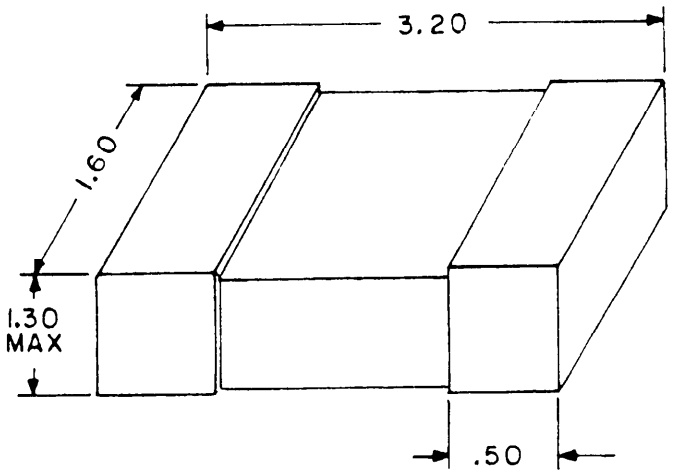

MM	INCHES
.20	.008
.30	.012
.50	.020
1.30	.051
1.60	.062
3.20	.125

NOTES:
1. Dimensions are in millimeters.
2. Dimensions are for bare chips, for solder coated terminations add .50 to the length and .30 to the width and thickness.
3. Unless otherwise specified, tolerance is ±.20.

FIGURE 1. Style CDR32 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

TABLE I. Style CDR32 capacitor characteristics.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	(pF)			volts, dc
CDR32BP1R0B---	1.0	B, C	BP	100
CDR32BP1R1B---	1.1	"	"	"
CDR32BP1R2B---	1.2	"	"	"
CDR32BP1R3B---	1.3	"	"	"
CDR32BP1R5B---	1.5	"	"	"
CDR32BP1R6B---	1.6	"	"	"
CDR32BP1R8B---	1.8	"	"	"
CDR32BP2R0B---	2.0	"	"	"
CDR32BP2R2B---	2.2	"	"	"
CDR32BP2R4B---	2.4	"	"	"
CDR32BP2R7B---	2.7	B, C, D	"	"
CDR32BP3R0B---	3.0	"	"	"
CDR32BP3R3B---	3.3	"	"	"
CDR32BP3R6B---	3.6	"	"	"
CDR32BP3R9B---	3.9	"	"	"
CDR32BP4R3B---	4.3	"	"	"
CDR32BP4R7B---	4.7	"	"	"
CDR32BP5R1B---	5.1	"	"	"
CDR32BP5R6B---	5.6	"	"	"
CDR32BP6R2B---	6.2	"	"	"
CDR32BP6R8B---	6.8	"	"	"
CDR32BP7R5B---	7.5	"	"	"
CDR32BP8R2B---	8.2	"	"	"
CDR32BP9R1B---	9.1	"	"	"
CDR32BP100B---	10	F, J, K	"	"
CDR32BP110B---	11	"	"	"
CDR32BP120B---	12	"	"	"
CDR32BP130B---	13	"	"	"
CDR32BP150B---	15	"	"	"
CDR32BP160B---	16	"	"	"
CDR32BP180B---	18	"	"	"
CDR32BP200B---	20	"	"	"
CDR32BP220B---	22	"	"	"
CDR32BP240B---	24	"	"	"
CDR32BP270B---	27	"	"	"
CDR32BP300B---	30	"	"	"
CDR32BP330B---	33	"	"	"
CDR32BP360B---	36	"	"	"
CDR32BP390B---	39	"	"	"
CDR32BP430B---	43	"	"	"
CDR32BP470B---	47	"	"	"
CDR32BP510B---	51	"	"	"
CDR32BP560B---	56	"	"	"
CDR32BP620B---	62	"	"	"
CDR32BP680B---	68	"	"	"
CDR32BP750B---	75	"	"	"
CDR32BP820B---	82	"	"	"
CDR32BP910B---	91	"	"	"

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

applicable, resistance shall also be measured between the contact and terminal and the case

TABLE I. Style CDR32 capacitor characteristics - Continued.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	(pF)			volts, dc
CDR32BP101B---	100	F, J, K	BP	100
CDR32BP111B---	110	"	"	"
CDR32BP121B---	120	"	"	"
CDR32BP131B---	130	"	"	"
CDR32BP151B---	150	"	"	"
CDR32BP161B---	160	"	"	"
CDR32BP181B---	180	"	"	"
CDR32BP201B---	200	"	"	"
CDR32BP221B---	220	"	"	"
CDR32BP241B---	240	"	"	"
CDR32BP271B---	270	"	"	"
CDR32BP301B---	300	"	"	"
CDR32BP331B---	330	"	"	"
CDR32BP361B---	360	"	"	"
CDR32BP391B---	390	"	"	"
CDR32BP431B---	430	"	"	"
CDR32BP471B---	470	"	"	"
CDR32BP511B---	510	"	"	"
CDR32BP561B---	560	"	"	"
CDR32BP621B---	620	"	"	"
CDR32BP681B---	680	"	"	"
CDR32BP751B---	750	"	"	"
CDR32BP821B---	820	"	"	"
CDR32BP911B---	910	"	"	"
CDR32BP102B---	1,000	"	"	"
CDR32BP112A---	1,100	"	"	50
CDR32BP122A---	1,200	"	"	"
CDR32BP132A---	1,300	"	"	"
CDR32BP152A---	1,500	"	"	"
CDR32BP162A---	1,600	"	"	"
CDR32BP182A---	1,800	"	"	"
CDR32BP202A---	2,000	"	"	"
CDR32BP222A---	2,200	"	"	"
CDR32BX472B---	4,700	K, M	BX	100
CDR32BX562B---	5,600	"	"	"
CDR32BX682B---	6,800	"	"	"
CDR32BX822B---	8,200	"	"	"
CDR32BX103B---	10,000	"	"	"
CDR32BX123B---	12,000	"	"	"
CDR32BX153B---	15,000	"	"	"
CDR32BX183A---	18,000	"	"	50
CDR32BX223A---	22,000	"	"	"
CDR32BX273A---	27,000	"	"	"
CDR32BX333A---	33,000	"	"	"
CDR32BX393A---	39,000	"	"	"

1/ The complete part number will include additional symbols to indicate capacitance tolerance, termination and failure rate level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body structure: Multi-layer, unencapsulated monolithic ceramic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: In accordance with MIL-C-55681.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - AS, OS
Air Force - 17, 85, 99
DLA - ES

User activities:
Navy - MC, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5910-1438-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.