MIL-A-58066A(GL)
AMENDMENT-3

11 March 1971
SUPERSEDING
Amendment-2
30 September 1970

MILITARY SPECIFICATION

ALTIMETER, PRESSURE, PARACHUTIST'S

This amendment forms a part of Military Specification MIL-A-58066A(GL), dated 21 September 1966.

PAGE 1

2.1, under listing of "SPECIFICATIONS, FEDERAL".- Delete "L-P-378", complete with title, and add the following in proper sequence:

"PPP-B-26 - Bag, Plastic, Polyethylene
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes."

Under "SPECIFICATIONS, MILITARY".- Delete "MIL-E-5272" and title, and add "MIL-D-6055 - Drums: Metal, Reusable, Shipping and Storage (Cap. from 88 to 510 cubic inches)".

Under "STANDARDS, MILITARY".- Add as follows:

"MIL-STD-130 - Identification Marking of U. S. Military Property
MIL-STD-810 - Environmental Test Methods
MIL-STD-889 - Dissimilar Metals"

PAGE 2

2.1 continued, under listing of "STANDARDS, MILITARY".- Delete "MS24123, MS33586, and MS35337" complete with titles. Add "MS35338 - Washer, Lock-Spring Helical, Regular (Medium) Series".

Add the following in proper sequence:

"2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

FSC 6610

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:59Z
Check the source to verify that this is the current version before use.

PAGE 2 (cont'd)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.,

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, Ill. 60606.)

3.1 Delete in its entirety and substitute the following:

"3.1 First article.- When specified, the supplier shall furnish a sample for first article inspection and approval (see 4.2.1, 6.2 and 6.5)."

3.2.1.1, line 1.- Delete "MS33586" and substitute "MIL-STD-889."

PAGE 3

3.2.3, third item.- Delete "MS35337-42" and substitute "MS35338-42".

3.3.3, first sentence.- Delete and substitute "A zero setting system shall be provided to compensate for changes in barometric pressure, and which will permit the altimeter to be set to indicate zero altitude at existing ground level pressure."

PAGE 5

3.4.1, second sentence.- Delete and substitute "The additional visual inspection and failure criteria specified in MIL-STD-810 shall also apply."

3.4.2, second sentence.- Delete and substitute "The additional visual inspection and failure criteria specified in MIL-STD-810 shall also apply."

PAGE 6

3.5, line 2.- Delete the second sentence and substitute "Marking for identification shall be in accordance with MIL-STD-130."

PAGE 7

4.2.1 Delete in its entirety and substitute the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:59Z
Check the source to verify that this is the current version before use.

PAGE 7 (cont'd)

"4.2.1 First article inspection.- Examination and testing of preproduction samples shall be made of completely fabricated altimeters (see 3.1, 6.2 and 6.5) for all provisions of this specification applicable to material, design, construction, and end product examinations and tests."

PAGE 12

4.3.1.1, at end of paragraph.- Add the following sentence: "Pretest performance data sufficient to determine compliance with humidity, salt spray and temperature shock requirements shall be obtained and recorded for subsequent correlation with test results as specified in MIL-STD-810."

4.3.1.2, line 3.- Delete "MIL-E-5272" and substitute "MIL-STD-810".

4.3.1.3, line 3.- Delete "MIL-E-5272" and substitute "MIL-STD-810".

4.3.1.5, line 8, after "shock".- Delete the remainder of sentence and substitute "in accordance with Procedure I of MIL-STD-810".

PAGES 15 and 16

Section 5.- Delete in its entirety and substitute as follows:

"5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- Each altimeter, with an envelope containing the mounting hardware (see 3.2.4), shall be preserved and packaged in accordance with method IId or IIf of MIL-P-116 and as hereinafter specified. The intimate wrap shall be a 0.001-inch minimum thickness polyethylene bag conforming to type I or II, grade A, style 1 or 2 of PPP-B-26. Alternatively, bag closure may be effected by double-folding at the mouth and taping the mouth full length to the body with pressure sensitive tape. Prior to or during the closure operation, excess air within the bag shall be expelled. Each bagged altimeter shall be completely enclosed with a nominal thickness of 1 inch cushioning material conforming to type II, class B of PPP-C-843. The rigid metal container for method IId shall conform to type III, plan B exterior coating of PPP-C-96; or classification optional of MIL-D-6055. The rigid nonmetal container for method IIf shall conform to type I, grade B, style b, class 1 of MIL-C-3955. The metal ends of the MIL-C-3955 container shall be painted an olive-drab color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:59Z
Check the source to verify that this is the current version before use.

PAGES 15 and 16 (cont'd)

5.1.2 Level C.- Each altimeter shall be preserved and packaged to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.- Twelve altimeters, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636; or overseas type, style A or J, type 2 load of PPP-B-601, as specified (see 6.2). Level A packages shall be packed upright three in length, two in width and two in depth within a shipping container. Each shipping container shall be provided with a top and bottom pad and a layer separator pad fabricated from fiberboard conforming to type CF, variety SW, class weather-resistant, grade optional of PPP-F-320. The length and width dimensions of each pad shall be 1/8 inch less than the respective length and width inside dimensions of the shipping container. Each shipping container shall be closed and reinforced in accordance with the appendix of the applicable container specification.

5.2.2 Level B.- Twelve altimeters, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed upright three in length, two in width and two in depth within a shipping container. Each shipping container shall be provided with top and bottom pad and a layer separator pad fabricated from fiberboard conforming to type CF, variety SW, class domestic, grade 200 of PPP-F-320. The length and width dimensions of each pad shall be 1/8 inch less than the respective length and width inside dimensions of the shipping container. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box, fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

5.2.3 Level C.- Altimeters, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:59Z
Check the source to verify that this is the current version before use.

PAGES 15 and 16 (cont'd)

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Precautionary marking.- The following precautionary marking shall appear in black on two opposite sides of each interior package and shipping container:

FRAGILE

DELICATE INSTRUMENTS

HANDLE WITH CARE"

PAGE 17

6.2 Delete in its entirety and substitute the following:

"6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. When a first article is required (see 3.1, 4.2.1, and 6.5).
c. Selection of applicable levels of preservation, packaging and packing (see 5.1 and 5.2).
d. Type of shipping container desired for level A packing (see 5.2.1).
e. When weather-resistant class fiberboard shipping containers are required for level B packing (see 5.2.2.1)."

Add the following new paragraph in proper sequence:

"6.5 First article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of three units. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article."

Figure 1.- Delete existing figure and substitute new figure 1 attached.

Custodian:

Army - GL

Review activities:

Army - AV, MD

Preparing activity:

Army - GL

Project No. 6610-A009

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:59Z
Check the source to verify that this is the current version before use.

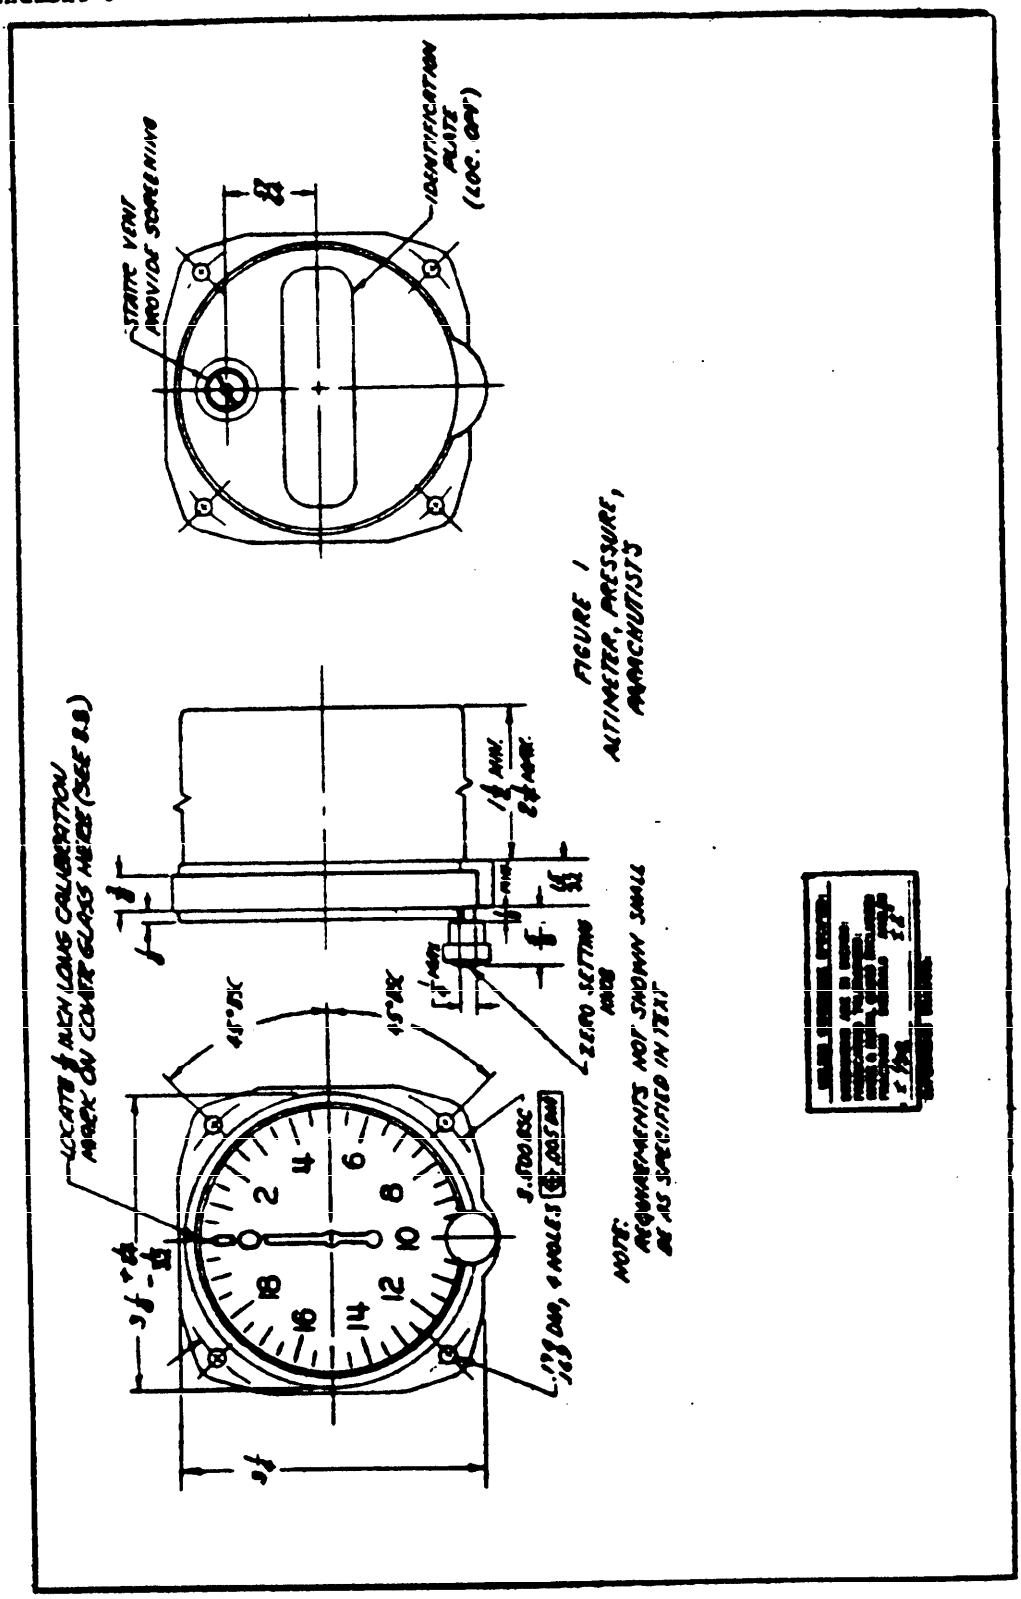


FIGURE 1
ALTIMETER, PRESSURE, ANNUNCIATOR 3

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:59Z
Check the source to verify that this is the current version before use.